


LED Neon Flex - LDNF200RGB

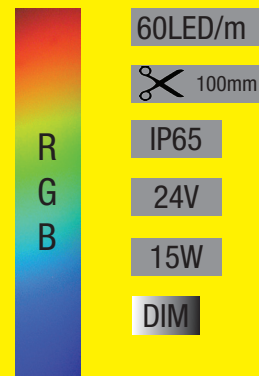


15W - 60LEDs/m IP65

SPECIFICATION

COLOUR	RGB Colour Chaging
CODE	LDNF200RGB24
WATTS	14.4W/m
VOLTS INPUT	24VDC
AMPS INPUT	0.6Amps/m (24V)
IP RATING	IP65
DIM PWM	Yes
WORKING TEMP	-25 to +60deg C
LED	Epistar 5050
EXPECTED LIFE	35,000hrs @ L70 **
WARRANTY	2years **
MAX RUN	10m
BEND RADIUS	200mm minimum
LED PITCH	16mm & 60 LEDs/m
CUT LENGTH	100mm (6 LEDs)
FIXING	3M doubled sided foam tape (VHB 5952)
CONNECTION	2 x 20AWG wire

DIMENSIONS

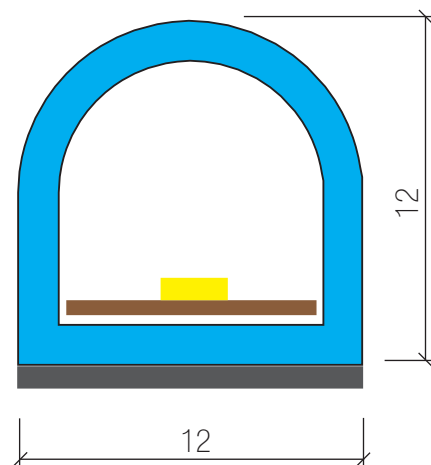

APPLICATIONS:

- # Accent lighting in exterior applications.
- # Exterior steps & seating.
- # Back lighting curved mirrors.
- # Creating sculptural luminous forms.

FEATURES:

- # 600 LEDs/m.
- # Continuous linear light with no spotting.
- # UV stabilised silicone tubing with 82% light transmittance.

NOTE:

- ** This linear LED product must be mounted on a heat sink .
 Suitable heat sinks would be a metal surface or aluminium flat bar.
 Failure to do so may result in a much shorter LED life, colour shift and void the warranty.
 Warm white & neutral stocked with other colours to order.

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors.
 Task Lighting also reserves the right to modify/delete product details without notice.