

## LumiFlex LED Neon - LDNF301SVF



Side View 120deg Mono Colour 15W IP68

R, G, B, Y, O, 22K, 27K, 3K, 32K, 4K, 45K, 5K, 65K

72LED/m

✂ 83.3mm

IP68


24V

15W DIM

### SPECIFICATION

CODE	LDNF301SVF
COLOUR	R, B, G, O, Y, 22K, 27K, 3K, 32K, 4K, 45K, 5K, 65K
WATTS	15W/m
VOLTS INPUT	24VDC
AMPS INPUT	0.63Amps/m
IP RATING	IP68
DIM PWM	Yes
WORKING TEMP	-30 to +45deg C
LED	Epistar 5050
WARRANTY	3years
MAX RUN	8m single feed or 16m double feed
BEND RADIUS	40mm minimum
BEAM ANGLE	120deg approx
CUT LENGTH	83.3mm (6 LEDs)
FIXING	By profile or clips
CONNECTION	Factory moulded cable

### DIMENSIONS

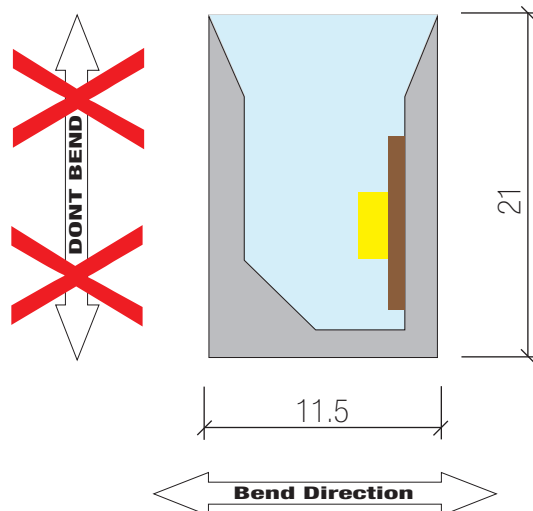

### FEATURES:

- # Continuous linear light with no spotting.
- # UV stabilised PVC & chlorine resistant.

### APPLICATIONS:

- # Accent lighting in exterior applications.
- # Exterior steps & seating.
- # High lighting buildings
- # Creating sculptural luminous forms.

### NOTE:

- # Cable entry type & cable length need to be specified.
- # When feeding from both ends its best practice for cable lengths to be the same.
- # Note that lengths will be cut down to the nearest cut point see "Cut Length" above.
- # Note bend direction diagram. Great care must be taken on install to bend only in the direction shown or risk breaking the LED circuit board & voiding the warranty.

