LCBT-SS-CB

Casambi Bluetooth + RF Relay Switch



PRODUCT OVERVIEW

Casambi Bluetooth + RF Relay Switch - Casambi Bluetooth +RF relay switch, 10A dry contact relay output, with zero-crossing detection function. - For on/off single-color LED lights, conventional incandescent and halogen lamps without dimming. - Casambi APP control, supports On/Off, group control, scene editing, power-on status and various power-down memory settings. - Match with RF 2.4G remote control optional. - With self-reset switch input interface. - Built-in high surge specification relay. - Can be mounted on a rail or in a standard wall junction box.

PRODUCT INFORMATION

CODE
LCBT-SS-CB

VOLTAGE INPUT
AC100-240V

OUTPUT CURRENT (PER CH)
10AResistive / 8A Driver

CHANNELS
1

DIMMING INPUT
BT/RF2.4GHz /Push switch

REMOTE ENABLED
Yes

SAFETY
EN 60669-1/-2


PROTECTION
Overheat

IP RATING
20

OPERATING TEMP
-20°C ~+55°C

DIMENSIONS
L49.5mm x W56mm x H28mm

DIMENSIONS

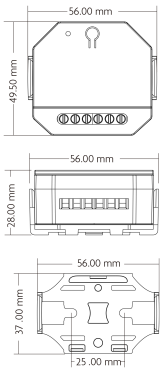

While every effort has been made to ensure accuracy, product specifications may vary. Task Lighting reserves the right to update or modify product details without notice.