


LumiFlex LED Neon - LDNF316SVR

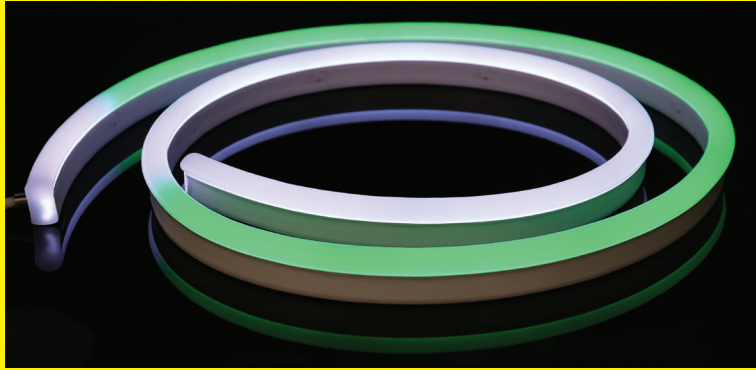

RGBW Pixel Chasing Side View 270deg 18W IP68

RGBWhite DMX
Pixel Chasing

RGB + 22K, 3K, 4K

70LED/m

100mm

IP68


24V

18W

SPECIFICATION

CODE	LDNF316SVR
COLOUR	DMX Dynamic Pixel RGBW + 2200K, 3000K, 4000K
WATTS	18W/m
VOLTS INPUT	24VDC
AMPS INPUT	0.75Amps/m
IP RATING	IP68
DIM PWM	Yes
WORKING TEMP	-30 to +45deg C
LED	Epistar 5050
WARRANTY	3years
MAX RUN	8m single feed or 16m double feed
BEND RADIUS	40mm minimum
BEAM ANGLE	270deg approx
CUT LENGTH	100mm (7 LEDs) Pixel Length
FIXING	By profile or clips
CONNECTION	Factory moulded cable

DIMENSIONS

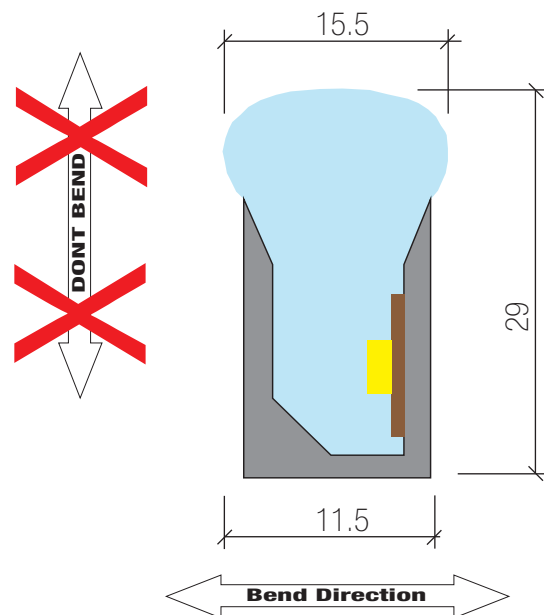

FEATURES:

- # Colour chasing or moving pixels in RGBW.
- # UV stabilised PVC & chlorine resistant.
- # DMX controlled giving ultimate scene control.


APPLICATIONS:

- # Accent lighting in exterior applications with moving colours.
- # High lighting buildings, bridges etc

NOTE:

- # Cable entry type & cable length need to be specified.
- # When feeding from both ends its best practice for cable lengths to be the same.
- # Note that lengths will be cut down to the nearest cut point see "Cut Length" above.
- # Note bend direction diagram. Great care must be taken on install to bend only in the direction shown or risk breaking the LED circuit board & voiding the warranty.

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

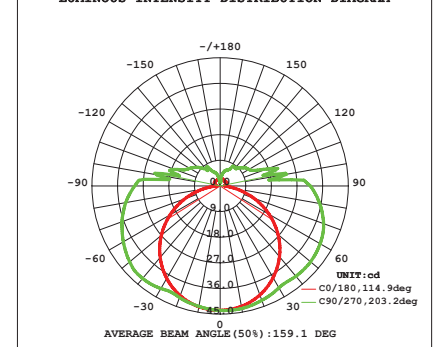

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors.
Task Lighting also reserves the right to modify/delete product details without notice.