






User Manual

Exterior Underground Lighting

Please read user manual before commencing installation and keep it for future reference.

■ **WARNING.**  Attention! Dangerous electrical voltage.
Possible consequences: Death or severe injury.

1. The safety of this lighting fixture is guaranteed only if you comply with these instructions.
2. Please use the specific input voltage.
3. Please disconnect the power before repair, installation or replacement.
4. Please use the lights in the proper application places as to avoid the lights be broken.
5. Do not locate fixtures in low areas where water will collect.
6. Please provide proper drainage (sand, gravel) for sleeve so that fixtures will not be immersed in water.
7. If any questions on this instruction, please consult a professional qualified technicians.

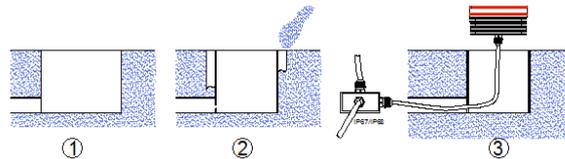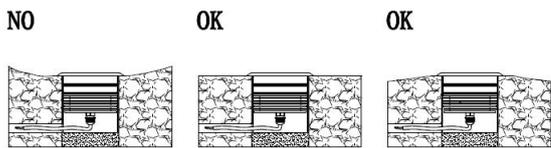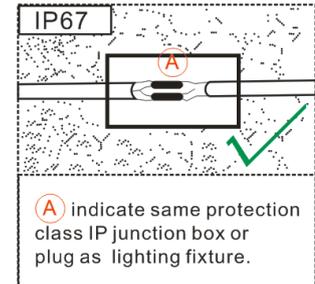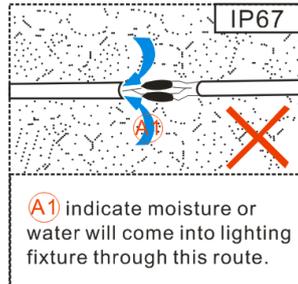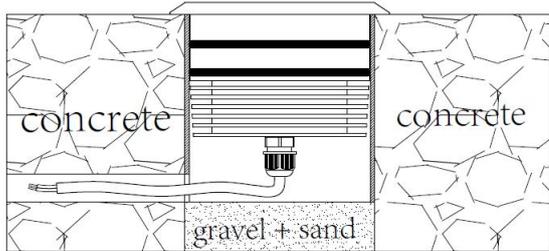

■ Instructions of installation.

1. Ensure mains supply is switched off during the whole installation period.

Dug a hole according to the dimension of the mounting sleeve.

2. Place the mounting sleeve in the desired position with underneath a layer of gravel and sand. This to obtain a good drainage of the underground light, then fix it with the concrete.

Please also make the tube for the lighting fixtures' wires to be connected with the power cable.

3. Connect the electric supply wires of "L", "N", "Ground" to the corresponding "L", "N", "Ground" of the fixture' s wires with the waterproof connector IP67 or IP68.

4. Push the fixture into the mounting sleeve.

Ensure everything is installed very well, and then turn on the power for the illumination application.

■ Specifications.

Item No.: Crema CH series




Input: AC100~245V

Power: 3W

IP rating: IP67

Class: I





Cut Out: 40mm

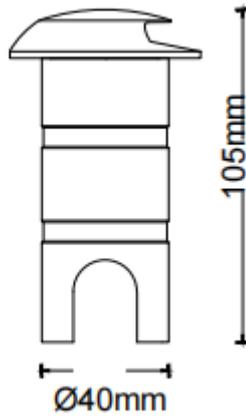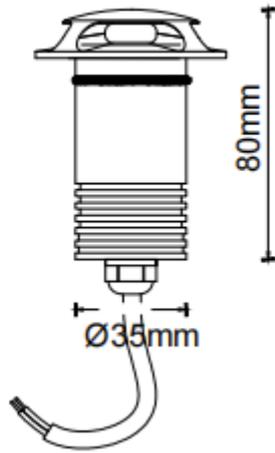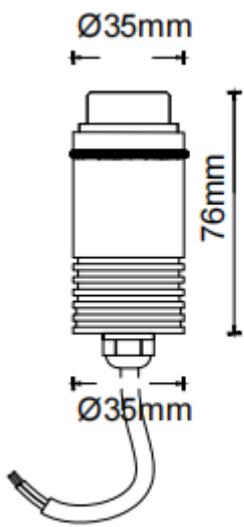

180D

1WAY





2WAY



3AWAY

3BWAY

4WAY



 Warning.

The non-professionals can not disassemble or repair the fixture. We keep the right to refuse the replacement or repairing of the fixtures that have been disassembled or repaired personally.