

LumiFlex LED Neon - LDNF351SVF



Side View 120deg Mono Colour 5W IP68

R, G, B, O, A, P, Y, 22K, 25K, 27K, 3K, 35K, 4K, 5K, 57K, 65K

70LED/m

✂ 100mm

IP68

24V


5W

DIM

SPECIFICATION

CODE	LDNF351SVF
COLOUR	R, B, G, O, A, P, Y, 22K, 25K, 27K, 3K, 35K, 4K, 5K, 57K, 65K
WATTS	5W/m
VOLTS INPUT	24VDC
AMPS INPUT	0.21Amps/m
IP RATING	IP68
DIM PWM	Yes
WORKING TEMP	-30 to +45deg C
LED	Epistar 2835
WARRANTY	3years
MAX RUN	10m single feed
BEND RADIUS	80mm minimum
BEAM ANGLE	120deg approx
CUT LENGTH	100mm (7LEDs)
FIXING	By profile or clips
CONNECTION	Factory moulded cable

DIMENSIONS

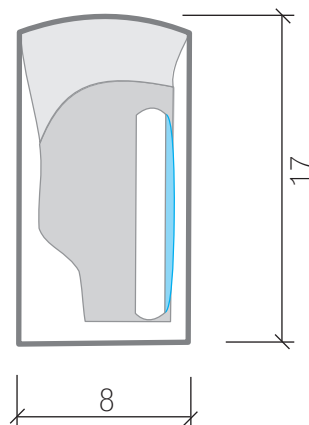

FEATURES:

- # Continuous linear light with no spotting.
- # UV stabilised PVC & chlorine resistant.

APPLICATIONS:

- # Accent lighting in exterior applications.
- # Exterior steps & seating.
- # High lighting buildings
- # Creating sculptural luminous forms.

NOTE:

- # Cable entry type & cable length need to be specified.
- # When feeding from both ends its best practice for cable lengths to be the same.
- # Note that lengths will be cut down to the nearest cut point see "Cut Length" above.
- # Note bend direction diagram. Great care must be taken on install to bend only in the direction shown or risk breaking the LED circuit board & voiding the warranty.

