

LCDMXSD-D4-L

DMX Decoder 4Chan X 5A 12-24V IP20

PRODUCT OVERVIEW

The D4-L is a versatile DMX decoder that is compliant with DMX512 protocols, featuring an easy-to-read digital display for quick address setup via onboard controls. With built-in RDM support, the address can also be configured directly from a DMX master console. Adjustable PWM frequency, selectable linear or logarithmic dimming curves, and flexible stand-alone or dimmer modes provide precise lighting control. D3-L offers stand-alone RGBW and 4-channel dimmer modes with built-in programs for button control without a DMX signal. Complete with automatic overheat and short-circuit protection for safe, reliable operation.

PRODUCT INFORMATION

CODE
LCDMXSD-D4-L

VOLTAGE INPUT
12-24VDC

VOLTAGE OUTPUT
12-24VDC

OUTPUT POWER
480W

OUTPUT CURRENT (PER CH)
5A

CHANNELS
4

DIMMING INPUT
DMX

DIMMING OUTPUT
PWM

DIMMING RANGE
0-100%

PWM FREQUENCY
0.25-32kHz

REMOTE ENABLED
No

STANDBY LOAD
0.5W

SAFETY
AS/NZS61347 EN55015


PROTECTION
Reverse polarity, over-heat, short circuit

IP RATING
20

OPERATING TEMP
-30°C to 50°C

DIMENSIONS
L170mm x W50mm x H23mm

DIMENSIONS

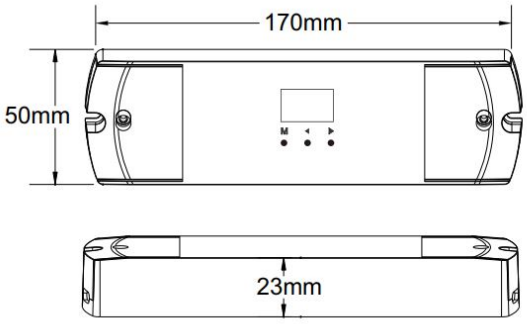

While every effort has been made to ensure accuracy, product specifications may vary. Task Lighting reserves the right to update or modify product details without notice.