



PSBW-BLG-50B-12

LED Driver Non Dimmable 12V DC 50W IP67


PRODUCT OVERVIEW

The PSBW-BLG-50B-12 driver is designed for a wide range of low-voltage lighting applications. It delivers a stable and consistent output. Built for durability, this driver is well suited for exterior installations. With universal AC input supporting the full voltage range up to 305VAC and a high power factor of over 0.96 at 230VAC (full load), it provides efficient and dependable performance.

PRODUCT INFORMATION

CODE	VOLTAGE INPUT
PSBW-BLG-50B-12	100-277VAC
VOLTAGE OUTPUT	OUTPUT POWER
12V	50W
AMPS OUTPUT	WORKING TEMP
4.17A	-40°C to 70°C
SAFETY	PROTECTION
AS/NZS61347 EN55015	Overvoltage, Short circuit Overtemperature, Overload
PST	SVM
= 1	= 0.4
MINIMUM LOAD	POWER FACTOR
45%	0.95
IP RATING	EFFICIENCY
67	85%
DC RIPPLE	
2%	

DIMENSIONS

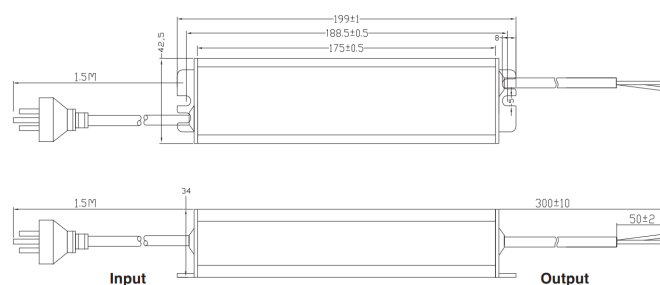

L199mm x W42.5mm x H34mm