

Specifiers Linear Series - LS131 - Interior




3000K	IP20	19.2W
4100K	24V	
5300K		
621nm	DIM	
528nm	240LED/m	
466nm	✂ 25mm 24V	

19.2W - High Density 240LEDs/m - Dot Free

SPECIFICATION			
COLOUR	Warm White	Neutral White	White
CODE	LS131WW24	LS131NW24	LS131W24
WATTS	19.2W/m		
VOLTS INPUT	24VDC		
AMPS INPUT	0.8Amps/m		
COLOUR TEMP	3000K	4100K	5300K
COLOUR TOLERANCE	+/- 100K	+/- 100K	+/- 200K
CRI	>80		
LUMENS	1440lm/m	1680lm/m	1680lm/m
EFFICACY	80lm/w	93lm/w	93lm/w
BEAM ANGLE	120deg		
IP RATING	IP20 Indoor Use Only		
DIM PWM	Yes		
WORKING TEMP	-25 to +60deg C		
LED	Epistar 3528		
EXPECTED LIFE	25,000hrs **		
WARRANTY	2years **		
MAX RUN LENGTH	5m		
LED PITCH	4mm & 1200 LEDs/m		
CUT LENGTH	25mm (6 LEDs)		
FIXING	3M doubled sided tape		
CONNECTION	2 x 20AWG wire		

DIMENSIONS

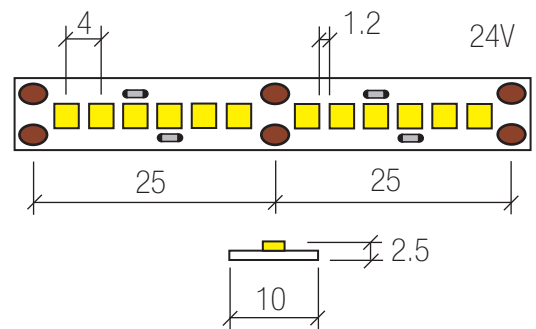

FEATURES:

- # High density 240 LEDs/m. Dot free.
- # Specifically designed to be dot free in shallow profiles & channels.
- # Looks dot free in like fluorescent with opal difusser.

APPLICATIONS:

- # Anywhere the leds are visable.
- # Under cabinets over benches.
- # Cove lighting etc.

NOTE:

** This linear LED product must be installed in an appropriate TASK Lighting or similar approved LED mounting profile/channel to dissipate heat. Failure to do so may result in a much shortened LED life, colour shift and void the warranty.

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors. Task Lighting also reserves the right to modify/delete product details without notice.