

LDSSL300-3K-5W

Garden Spot Light Series



Features

- Anti-siphon cable
- Cree LEDs
- Structural grade 6063 aluminium and toughened glass
- Marine grade anodising
- Safe low voltage
- Constant voltage input
- Surface mount or garden spike

Applications


- Exterior and garden spot lighting
- High lighting trees and shrubs
- General feature lighting
- Water features – not total submersion

Technical Parameters

| General Data | |
|-----------------|--|
| Power | 6W (draw) 5W (LED) |
| CCT | 3000K (CRI80+) |
| Lumens | 350 |
| Beam angle | 38° |
| Dimensions | 42 x 77 (mm) Diameter x Height |
| Warranty | 3 Years |
| Dim | No |
| Electrical Data | |
| Amps input | 0.5Amps @12V or .27Amps @24V |
| Input voltage | 12-24VDC |
| Cable | 1PC rubber cable 1.5M H05RNF 5x0.5mm square |

| Construction Data | |
|-----------------------|--|
| IP rating | IP67 Waterproof |
| Protection: Finishing | Anodised charcoal (25-30micron) |
| Lens | Frosted glass (tempered) |
| Operating temp | -20° - +70°C |
| Expected life | 50,000hrs |
| Colour | Anodised charcoal colour (25-30micron) |
| Fixings | 316 stainless steel |
| Mounting | Adjustable tilt "U" |
| Accessories | |
| Spike Code | LDSSLSPIKE (ordered separately) |

Dimensions

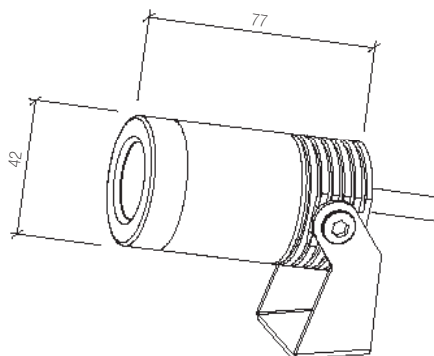

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors. Task Lighting also reserves the right to modify/delete product details without notice.