

### Extrusion installation:

- Drivers are remote mounted only
- Ceiling rose is not supplied

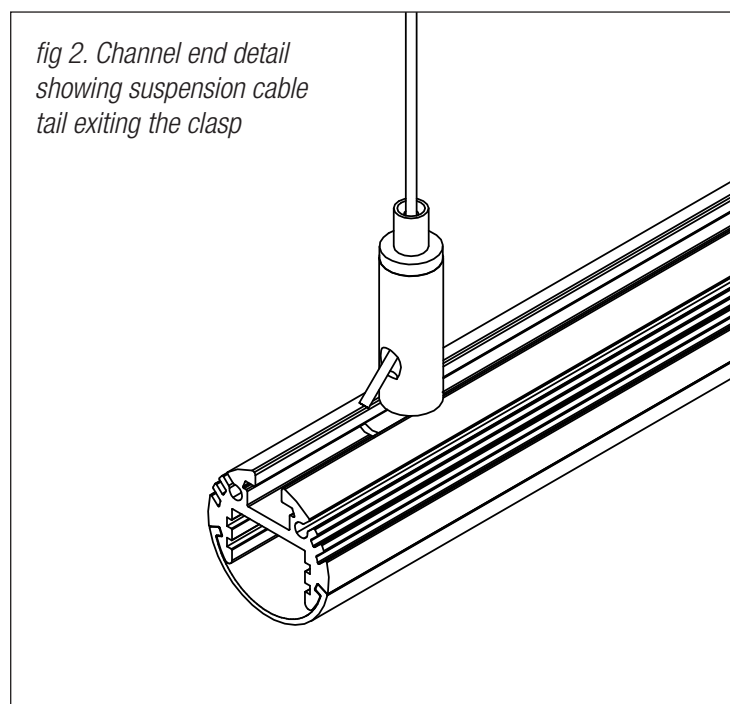


fig 2. Channel end detail showing suspension cable tail exiting the clasp

Technical drawing of a mechanical assembly, showing four views and dimensions:

- Top View:** Shows a rectangular base with a central vertical rod passing through it. The rod has a series of rectangular blocks or washers stacked on top, secured by a nut and a bolt.
- Front View:** Shows a rectangular base with a central vertical rod. A spring is coiled around the rod, positioned between the base and a horizontal plate. The rod extends above the plate.
- Side View:** Shows a rectangular base with a central vertical rod. A spring is coiled around the rod, positioned between the base and a horizontal plate. The rod extends above the plate.
- Bottom View:** Shows a circular base with a central vertical rod. The rod has a series of rectangular blocks or washers stacked on top, secured by a nut and a bolt. The base has a circular flange with a serrated edge.

Dimensions:

- 1150:** Dimension indicating the total height of the assembly from the base to the top of the rod.
- 40:** Dimension indicating the height of the base component.