


IP20 STRIP PACK

4.8W/m 24VDC IP20

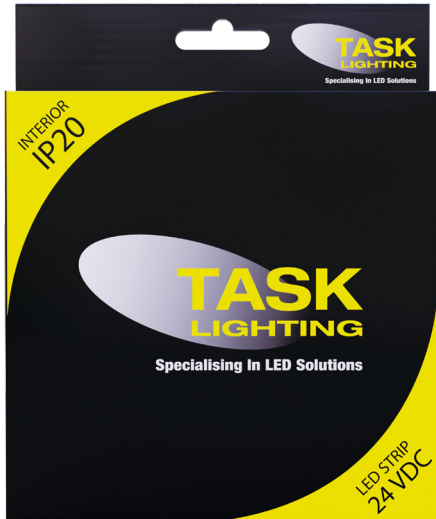

Features

- CRI 92+
- Constant Voltage 24VDC
- High density 140LEDs/m
- Complete with pre soldered 0.5mm tails. 3m, 4m and 5m packs have 1m tails one end and 300mm tails on the opposite end
- Supplied with 3M double sided tape for easy install. LED strip must be installed using a TASK Lighting approved mounting profile for warranty purposes
- Dimmable by PWM (Pulse width modulation)


Specification

Watts/m	4.8W/m
Lumen output	3000K - 360Lm/m 4100K - 390Lm/m 5500K - 420Lm/m
CRI	92+
Beam angle	140°
Cut points	50mm
Max single feed run	5m
LEDS/m	140 LEDs/m
Working temp	-25 ~ 60°C
Warranty	3 Years
IP rating	IP20
Dimmable	Yes (PWM)

Applications

- Under shelf display lighting
- Kitchen toe kicks
- Under bench top returns
- Book shelving
- Stair lighting

Dimensions

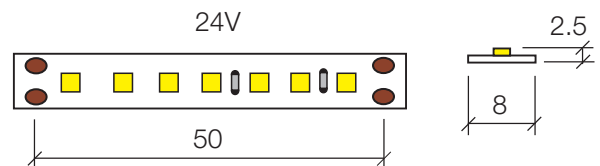

Codes

CCT	1M	2M	3M	4M	5M
WW (3000K)	DSL4.8WW24V1M	DSL4.8WW24V2M	DSL4.8WW24V3M	DSL4.8WW24V4M	DSL4.8WW24V5M
NW (4100K)	DSL4.8NW24V1M	DSL4.8NW24V2M	DSL4.8NW24V3M	DSL4.8NW24V4M	DSL4.8NW24V5M
W (5500K)	DSL4.8W24V1M	DSL4.8W24V2M	DSL4.8W24V3M	DSL4.8W24V4M	DSL4.8W24V5M

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors. Task Lighting also reserves the right to modify/delete product details without notice.