


IP66 STRIP PACK

4.8W/m 24VDC IP66

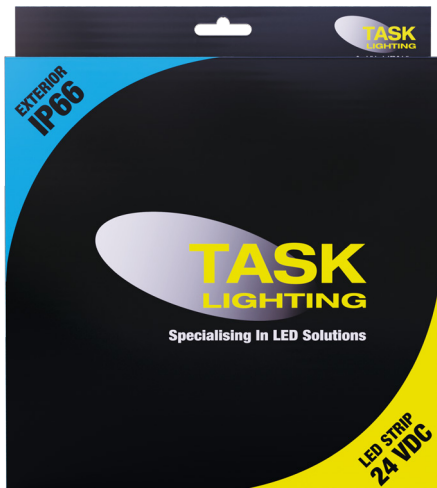

Features

- CRI 92+
- Constant Voltage 24VDC
- High density 140LEDs/m
- Complete with pre soldered 0.5mm tails (clear) 1m long
- Supplied with 3M double sided tape for easy install. LED strip must be installed using a TASK Lighting approved mounting profile for warranty purposes
- Dimmable by PWM (Pulse width modulation)

Specification


| | |
|---------------------|--|
| Watts/m | 4.8W/m |
| Lumen output | 3000K - 360Lm/m Silicone sleeves cause a colour shift of approx +200K |
| Beam angle | 120° |
| Cut points | 50mm |
| Max single feed run | 5m |
| LEDS/m | 140 LEDs/m |
| Working temp | -25 ~ 60°C |
| Warranty | 3 Years |
| IP rating | IP66 |
| Dimmable | Yes (PWM) |

Applications

- Under exterior bench seating
- Under exterior stair treads
- Under eaves
- Bathrooms
- Pergolas

Note: The silicone sleeving on this strip is not UV stable and should only be installed in applications out of direct sunlight. Neon flex would be recommended in this case with UV protection.

Dimensions

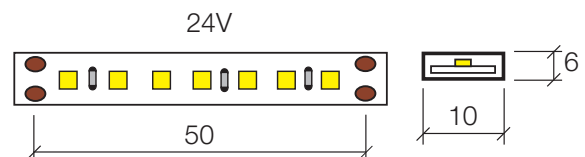

Note: End caps are bigger than the silicone sleeve & sealed by silicone adhesive these add around 2mm to the width shown above.

Codes

| CCT | 2M | 3M | 5M |
|------------|----------------|----------------|----------------|
| WW (3000K) | DSLE4.8WW24V2M | DSLE4.8WW24V3M | DSLE4.8WW24V5M |

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors. Task Lighting also reserves the right to modify/delete product details without notice.