
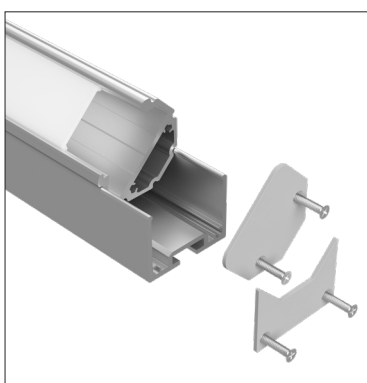


# LEDCHAN750



Surface Mount/Suspended Down or 45deg Profile

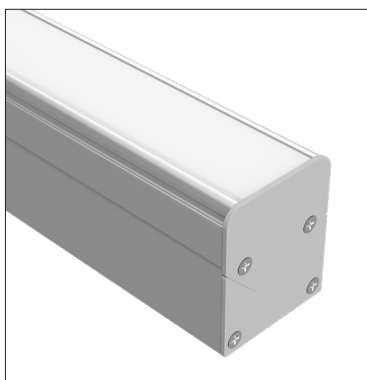

## Features

- W25mm x H29.7mm
- Surface mount or suspended
- Simple installation
- Two part profile allowing for downward illumination or 45° sideways illumination
- Max 4m or cut to size
- 6063 Structural grade aluminium
- PMMA lens (type of acrylic) interior use
- Silver anodised (8micron natural colour)

## Dimensions



## Applications

- High lighting artwork
- Retail product lighting
- Work light

## Notes

- Drivers are remote
- Cable entry at the back of the profile with a grommet
- Product is only stocked in silver anodised and cannot be powder coated

## Product Codes

Finish	Code
Silver anodised	LEDCHAN750OL (opal lens)
Accessories	
Silver end caps without hole	LEDCHAN750EC1 (end cap no wire holes)
Grommets (rear cable entry)	GROMMETS
Joiners	LEDCHANJ180MID (180° joiner)
	LEDCHANJ120MID (120° joiner)
	LEDCHANJ90MID (90° joiner)
Suspension Kits	LEDCHANSK1.2M (1.2m drop)
	LEDCHANSK2.5M (2.5m drop)
	LEDCHANSK5M (5m drop)