

Specifiers Linear Series - LS132 - Interior




3K IP20 19.2W
24V
DIM
120LED/m
6.5K ✂ 50mm 24V

19.2W - Dual White Mixing - Warm White/White

SPECIFICATION	
COLOUR	Warm White/White
CODE	LS132WW/W24
WATTS	19.2W/m
VOLTS INPUT	24VDC
AMPS INPUT	0.8Amps/m
COLOUR TEMP	3000K - 6500K mixable
COLOUR TOLERANCE	+/- 200K
CRI	>80
LUMENS	1440lm/m
EFFICACY	80lm/w
BEAM ANGLE	120deg
IP RATING	IP20 Indoor Use Only
DIM PWM	Yes
WORKING TEMP	-25 to +60deg C
LED	Epistar 3528
EXPECTED LIFE	25,000hrs **
WARRANTY	2years **
MAX RUN LENGTH	5m
LED PITCH	8.3mm & 120 LEDs/m
CUT LENGTH	50mm (6 LEDs)
FIXING	3M double sided tape
CONNECTION	3 x 20AWG wire

DIMENSIONS

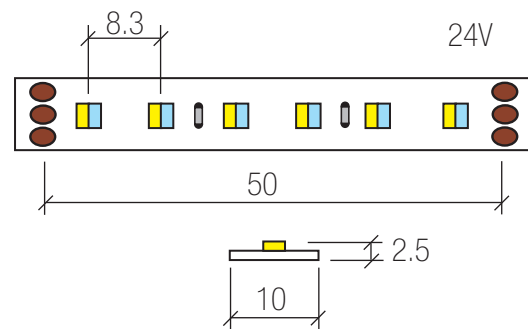

FEATURES:

- # 3M double sided tape mounting
- # 2oz rolled copper for superior heat dissipation
- # Get the most out of your environment by creating ambience or an invigorating concentration space all by using our LS132 tuneable white LED strip in the channel and lens of your choice
- # Requires a dedicated dual channel controller

APPLICATIONS:

- # Lounges, dining, media room
- # Cove lighting
- # Office lighting

NOTE:

** This linear LED product must be installed in an appropriate TASK Lighting or similar approved LED mounting profile/channel to dissipate heat
Failure to do so may result in a much shorter LED life, colour shift and void the warranty

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors.
Task Lighting also reserves the right to modify/delete product details without notice.