


LDRTL700-4W-6V


220-240V Constant Current Driver

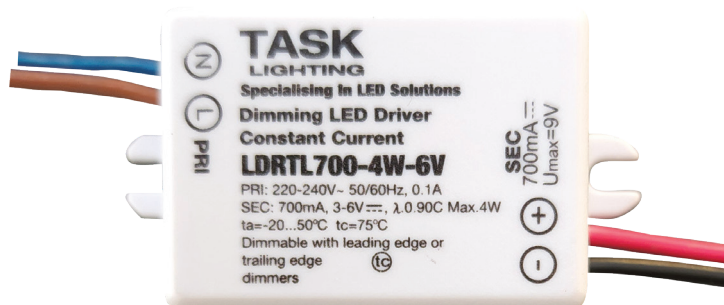


Features

- Dimmable with leading edge or trailing edge dimmers
- IP65 for exterior use
- Flying leads in and out
- Compact design

Wiring diagram

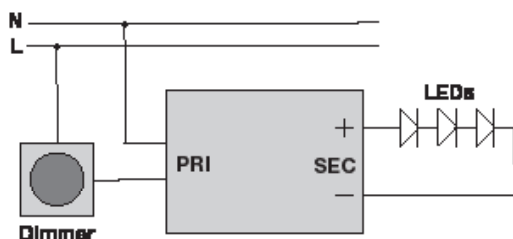

Dimensions

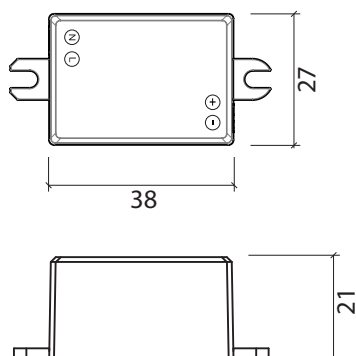

Technical Data

| Input parameters | |
|---------------------------------|-----------------------------------|
| Rated input voltage | 220-240VAC |
| Input current (Full load) | 0.01A |
| Input frequency | 50/60Hz |
| Max input power | 6.0W |
| Power factor (Full load) | ≥0.90C |
| Inrush current | ≤5.0A |
| Output parameters | |
| Output Voltage | 3-6V |
| Output Current (Full load) | 700mA±5% |
| Output Power (Full load) | 4W |
| Operating Frequency (Full load) | 70KHz |
| Environment | |
| Working temperature | -20 ...+ 50°C |
| Safety | Tested to AS/NZS requirements |
| Protection | |
| No load | Auto-recovery if fault is removed |
| Over load | |
| Short circuit | |
| Expected life | 30,000 Hours |
| Warranty | 2 year |
| IP rating | IP65 |

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors. Task Lighting also reserves the right to modify/delete product details without notice.