

LDRTL350-4W-12V


220-240V Constant Current Driver




Features

- Dimmable with leading edge or trailing edge dimmers
- IP65 for exterior use
- Flying leads in and out
- Compact design

Wiring diagram

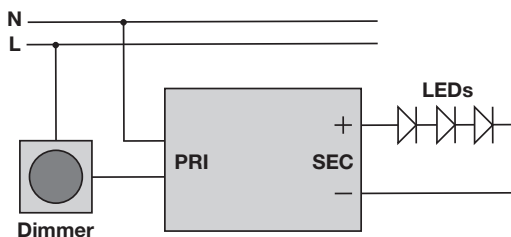

Dimensions

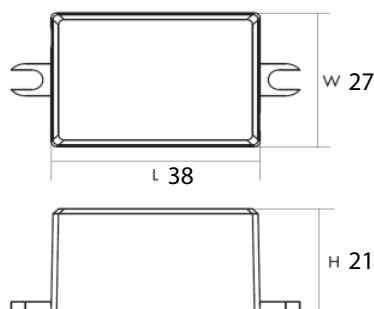

Technical Data

Input parameters	
Rated input voltage	220-240V
Input current (Full load)	0.03Amps
Input frequency	50/60Hz
Max input power	4W
Power factor (Full load)	≥0.90C
THD (Full load)	≤25%
Inrush current	≤3.0A
Output parameters	
Output Voltage	6-12V
Output Current (Full load)	350mA±5%
Output Power (Full load)	4W
Operating Frequency (Full load)	70KHz
Environment	
Working temperature	-20°C.. + 50°C
Safety	Tested to AS/NZS requirements
Protection	
No load	Auto-recovery if fault is removed
Over load	
Short circuit	
Expected life	30,000 Hours
Warranty	2 Years
IP rating	IP65

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors. Task Lighting also reserves the right to modify/delete product details without notice.