


LS100E

Classic Series 19W/m Exterior LED Strip



Dimensions

24V

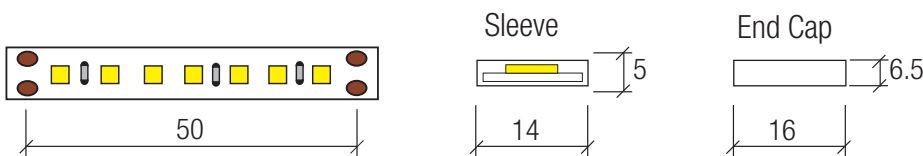

Specification

COLOUR	2700K	3000K	4000K	5500K
CODE	LS100E-24V-19W-27K	LS100E-24V-19W-3K	LS100E-24V-19W-4K	LS100E-24V-19W-55K
WATTS	19W/m			
VOLTS INPUT	24VDC			
AMPS INPUT	0.8Amps/m			
COLOUR TOLERANCE	+/- 100K	+/- 100K	+/- 100K	+/- 200K
CRI	>90			
LUMENS	1720lm/m	1720lm/m	1820lm/m	1900lm/m
EFFICACY	86lm/w	86lm/w	91lm/w	95lm/w
BEAM ANGLE	120°			
IP RATING	IP65 silicone sleeve			
DIM PWM	Yes			
WORKING TEMPERATURE	-25° C to + 60° C			
LED TYPE	Epistar 3528			
LUMEN MAINTENANCE	L70B10 @ 50,000hrs			
WARRANTY	5years			
MAX RUN LENGTH	5m			
LED PITCH	4mm & 240 LEDs/m			
CUT LENGTH	25mm (6 LEDs)			
FIXING	3M doubled sided tape			
CONNECTION	0.5mm² red/black 2 core tail			

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors.
Task Lighting also reserves the right to modify/delete product details without notice.