

Specifiers Linear Series - LS102RGB - Exterior




- IP65
- 7.2W
- 24V
- 12V
- DIM
- 30LED/m
- ✂ 100mm 12V
- ✂ 200mm 24V

Low Power - 7.2W - RGB Colour Changing - IP65

SPECIFICATION	
COLOUR	RGB
CODE (24V)	LS102RGB24
CODE (12V)	LS102RGB12
WATTS	7.2W/m
VOLTS INPUT	24VDC & 12VDC
AMPS INPUT	0.3Amps/m @ 24V & 0.6Amps @ 12V
COLOUR TEMP	Red 621nm, Green 528nm, Blue 466nm
BEAM ANGLE	120deg
IP RATING	IP65
DIM PWM	Yes
WORKING TEMP	-20 to +60deg C
LED	Epistar
EXPECTED LIFE	25,000hrs **
WARRANTY	2years **
MAX RUN LENGTH	5m
LED PITCH	33mm (30 LEDs/m)
CUT LENGTH	100mm 12V & 200mm 24V
FIXING	3M double sided tape & silicone saddles
CONNECTION	4 x 20AWG wire

DIMENSIONS

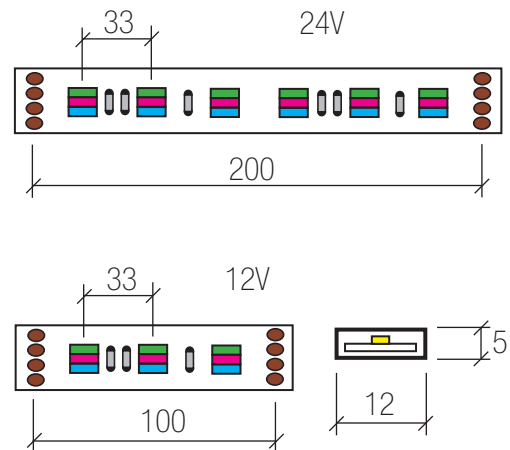

FEATURES:

- # RGB lighting at its best providing ambience.
- # 3M double sided tape mounting.
- # Requires dedicated RGB 3 channel controllers.
- # 1oz copper tape for greater heat disipation
- # Weather proof in a silicone sleeve.

APPLICATIONS:

- # Under exterior bench seating.
- # Under exterior stair treads.
- # Under eaves.
- # Bathrooms.
- # Pergolas.

NOTE:

** This linear LED product must be installed in an appropriate TASK Lighting or similar approved LED mounting profile/channel to dissipate heat. Failure to do so may result in a much shortened LED life, colour shift and void the warranty.

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors. Task Lighting also reserves the right to modify/delete product details without notice.