


Specifiers Linear Series - LS104 - CRI 95

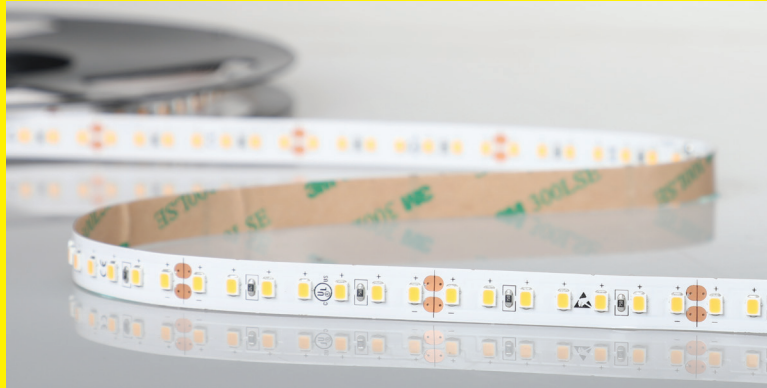



- IP20 15W
- 24V CRI 95
- DIM
- 140LED/m
- ✂ 50mm 24V

15W - 140LEDs/m - High Power

SPECIFICATION

COLOUR	3000K
CODE (24V)	LS104WW24-CRI95
WATTS	15W/m
VOLTS INPUT	24VDC
AMPS INPUT	0.625Amps/m (24V)
COLOUR TEMP	3000K
COLOUR TOL	+/- 100K
CRI	>95 R9=89
LUMENS	1425lm/m
EFFICACY	95lm/w
BEAM ANGLE	120°
IP RATING	IP20 Indoor Use Only
DIM PWM	Yes
WORKING TEMPERATURE	-25° C to +60° C
LED	Epistar 5050
LUMEN MAINTENANCE	L70 @ 50,000hrs
WARRANTY	5years
MAX RUN	10m
LED PITCH	7.1mm & 140 LEDs/m
CUT LENGTH	50mm (7 LED)
FIXING	3M doubled sided tape
CONNECTION	0.5mm ² red/black 2 core tail

DIMENSIONS

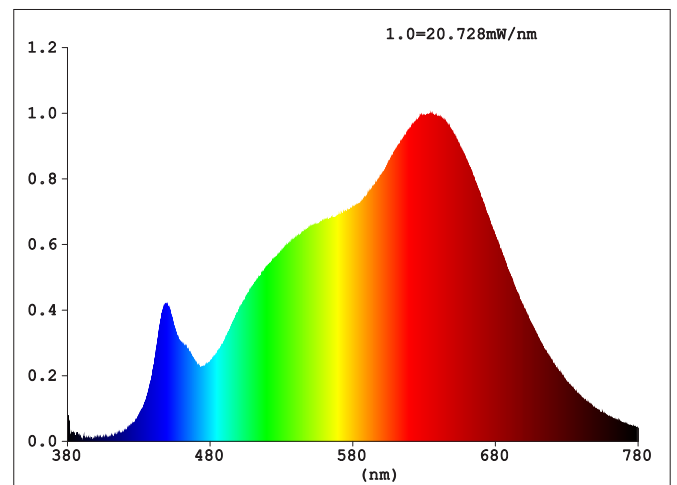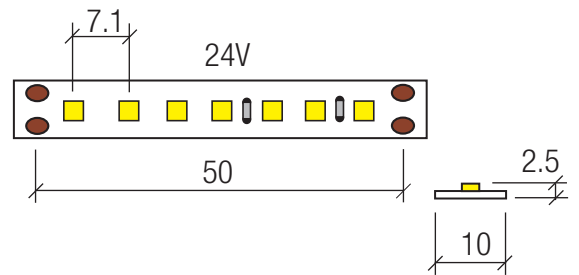

APPLICATIONS

- # Anywhere a high colour rendering is needed
- # Museums, art galleries, clothing shops, shoe shops
- # Cabinet and display lighting

NOTE

This linear LED product must be installed in an appropriate TASK Lighting or similar approved LED mounting profile/channel to dissipate heat. Failure to do so may result in a much shorter LED life, colour shift and void the warranty.

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors. Task Lighting also reserves the right to modify/delete product details without notice.