


LS110

Classic Series 19W/m Interior High CRI LED Strip



Dimensions

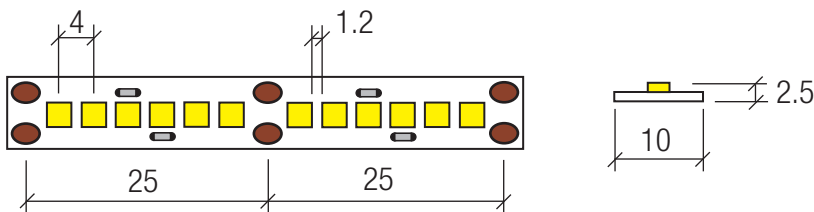

Features


- High density 240 LEDs/m.
- Specifically designed to be dot free in shallow profiles and channels with an opal lens giving a even illumination like fluorescent or neon.

Specification

COLOUR	3000K	4000K	5500K
CODE	LS110-24V-19W-3K	LS110-24V-19W-4K	LS110-24V-19W-55K
WATTS	19W/m		
VOLTS INPUT	24VDC		
AMPS INPUT	0.8Amps/m		
CRI	>95		
LUMENS	1720lm/m	1820lm/m	1900lm/m
EFFICACY	86lm/w	91lm/w	95lm/w
BEAM ANGLE	120°		
IP RATING	IP20 Indoor Use Only		
DIM PWM	Yes		
WORKING TEMPERATURE	-25°C to + 60°C		
LED TYPE	Epistar 3528		
LUMEN MAINTENANCE	L70B10 @ 50,000hrs		
WARRANTY	5years		
MAX RUN LENGTH	5m		
LED PITCH	4mm & 240 LEDs/m		
CUT LENGTH	25mm (6 LEDs)		
FIXING	3M doubled sided tape		
CONNECTION	0.5mm² red/black 2 core tail		

Applications

- Anywhere high colour rendering is essential
- Clothing & shoe shops
- Art galleries & museums
- Cabinet and display lighting

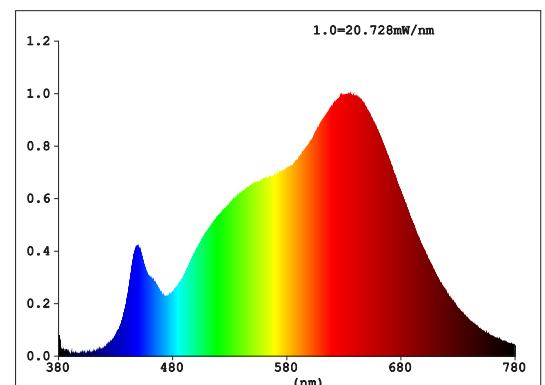

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors.
Task Lighting also reserves the right to modify/delete product details without notice.