

## Specifiers Linear Series - LS131 - CRI 95



IP20

24V

DIM


CRI 95

240LED/m

25mm 24V

**19.2W - High Density 240LEDs/m - Dot Free**

SPECIFICATION			
COLOUR	3000K	4000K	5500K
CODE	LS131WW24-CRI95	LS131NW24-CRI95	LS131W24-CRI95
WATTS	19.2W/m		
VOLTS INPUT	24VDC		
AMPS INPUT	0.8Amps/m		
CRI	>95		
LUMENS	1720lm/m	1820lm/m	1900lm/m
EFFICACY	86lm/w	91lm/w	95lm/w
BEAM ANGLE	120°		
IP RATING	IP20 Indoor Use Only		
DIM PWM	Yes		
WORKING TEMPERATURE	-25°C to + 60°C		
LED TYPE	Epistar 3528		
LUMEN MAINTENANCE	L70 @ 50,000hrs		
WARRANTY	5years		
MAX RUN LENGTH	5m		
LED PITCH	4mm & 240 LEDs/m		
CUT LENGTH	25mm (6 LEDs)		
FIXING	3M doubled sided tape		
CONNECTION	0.5mm <sup>2</sup> red/black 2 core tail		

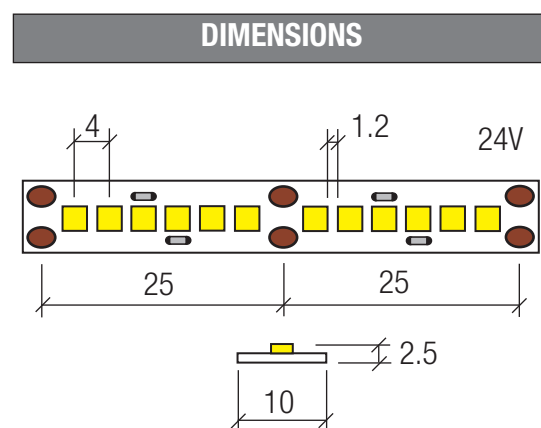

### FEATURES


- # High density 240 LEDs/m
- # Specifically designed to be dot free in shallow profiles and channels with an opal lens giving a totally even illumination like fluorescent or neon

### APPLICATIONS

- # Anywhere high colour rendering is essential
- # Clothing & shoe shops
- # Art galleries & museums
- # Cabinet and display lighting

### NOTE

This linear LED product must be installed in an appropriate TASK Lighting or similar approved LED mounting profile/channel to dissipate heat. Failure to do so may result in a much shortened LED life, colour shift and void the warranty.

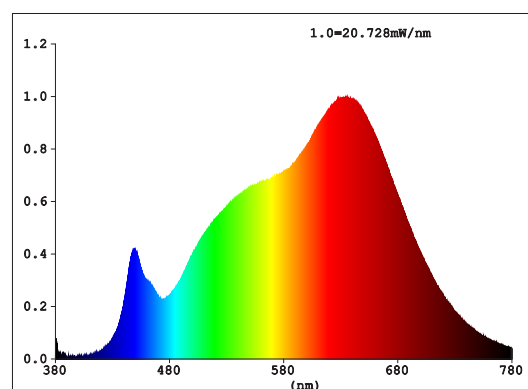

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors. Task Lighting also reserves the right to modify/delete product details without notice.