

Specifiers Linear Series - LS133



IP65

24V

CRI 90

✂ 25mm


240LED/m

DIM (PWM)

19.2W - High Density 240LEDs/m - Dot Free - IP65

SPECIFICATION				
COLOUR	2700K	3000K	4000K	5500K
CODE	LS133WW24-27K	LS133WW24	LS133NW24	LS133W24
WATTS	19.2W/m			
VOLTS INPUT	24VDC			
AMPS INPUT	0.8Amps/m			
COLOUR TOLERANCE	+/- 100K	+/- 100K	+/- 100K	+/- 200K
CRI	>90			
LUMENS	1720lm/m	1720lm/m	1820lm/m	1900lm/m
EFFICACY	86lm/w	86lm/w	91lm/w	95lm/w
BEAM ANGLE	120°			
IP RATING	IP65 silicone sleeve			
DIM PWM	Yes			
WORKING TEMPERATURE	-25° C to + 60° C			
LED TYPE	Epistar 3528			
LUMEN MAINTENANCE	L70 @ 50,000hrs			
WARRANTY	5years			
MAX RUN LENGTH	5m			
LED PITCH	4mm & 240 LEDs/m			
CUT LENGTH	25mm (6 LEDs)			
FIXING	3M doubled sided tape			
CONNECTION	0.5mm ² red/black 2 core tail			

DIMENSIONS

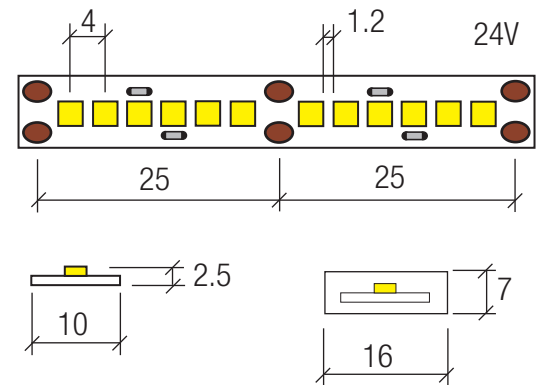

FEATURES

- # High density 240 LEDs/m
- # Specifically designed to be dot free even in shallow profiles and channels with an opal diffuser giving a smooth fluorescent like illumination

APPLICATIONS

- # Under exterior bench seating
- # Under exterior stair treads
- # Under eaves
- # Bathrooms
- # Pergolas

NOTE

This linear LED product must be installed in an appropriate TASK Lighting or similar approved LED mounting profile/channel to dissipate heat. Failure to do so may result in a much shortened LED life, colour shift and void the warranty.