


Specifiers Linear Series - LS141 - Interior

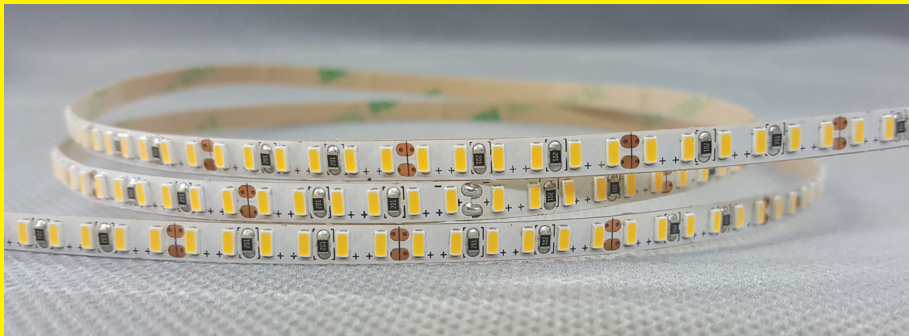


3000K	240LED/m
4000K	✂ 25mm
5500K	IP20
621nm	24V
528nm	15W
466nm	DIM

Micro Strip - 15W - 240LEDs/m

SPECIFICATION						
COLOUR	Warm White	Neutral White	White	Red	Green	Blue
CODE	LS141WW24	LS141NW24	LS141W24	LS141R24	LS141G24	LS141B24
WATTS	15W/m					
VOLTS INPUT	24VDC					
AMPS INPUT	0.6Amps/m (24V)					
COLOUR TEMP	3000K	4000K	5500K	621nm	528nm	466nm
COLOUR TOL	+/- 100K	+/- 100K	+/- 200K	+/- 1nm	+/- 1nm	+/- 1nm
CRI	>80			---	---	---
LUMENS	1650lm/m	1800lm/m	1950lm/m	---	---	---
BEAM ANGLE	120deg					
IP RATING	IP20 Indoor Use Only					
DIM PWM	Yes					
WORKING TEMP	-25 to +60deg C					
LED	San'an 2480					
EXPECTED LIFE	25,000hrs **					
WARRANTY	2years **					
MAX RUN	5m					
LED PITCH	4.5mm & 240 LEDs/m					
CUT LENGTH	25mm (6 LEDs)					
FIXING	3M doubled sided tape					
CONNECTION	2 x 20AWG wire					

DIMENSIONS

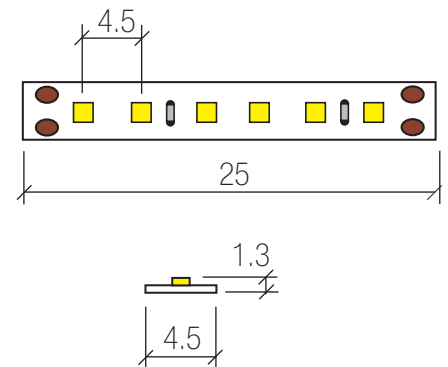

FEATURES

- # 240 LEDs/m
- # Narrow profile for slim line detail

APPLICATIONS

- # Under shelf display lighting
- # Kitchen toe kicks
- # Under bench top returns
- # Book shelving
- # Accent lighting

NOTE

- This linear LED product must be installed in an appropriate TASK Lighting or similar approved LED mounting profile/channel to dissipate heat. Failure to do so may result in a much shorter LED life, colour shift and void the warranty.
- As this LED strip is extremely delicate it can only be dispatched fully assembled into the chosen mounting profile. This strip is suited to standard extrusions and runs too hot in the micro profiles.