


## Specifiers Linear Series - LS146 - Exterior



3000K	240LED/m
4000K	✂ 25mm
5500K	IP65
621nm	24V
528nm	6.3W
466nm	DIM

### Micro Strip - 6.3W - 240LEDs/m

SPECIFICATION						
COLOUR	Warm White	Neutral White	White	Red	Green	Blue
CODE	LS146WW24	LS146NW24	LS146W24	LS146R24	LS146G24	LS146B24
WATTS	6.3W/m					
VOLTS INPUT	24VDC					
AMPS INPUT	0.26Amps/m (24V)					
COLOUR TEMP	3000K	4000K	5500K	621nm	528nm	466nm
COLOUR TOL	+/- 100K	+/- 100K	+/- 200K	+/- 1nm	+/- 1nm	+/- 1nm
CRI	>80			---	---	---
LUMENS	630lm/m	750lm/m	820lm/m	---	---	---
BEAM ANGLE	120deg					
IP RATING	IP65 Exterior Use					
DIM PWM	Yes					
WORKING TEMP	-25 to +60deg C					
LED	Epistar 3014					
EXPECTED LIFE	25,000hrs **					
WARRANTY	2years **					
MAX RUN	5m					
LED PITCH	4.5mm & 240 LEDs/m					
CUT LENGTH	25mm (6 LEDs)					
FIXING	3M doubled sided tape					
CONNECTION	2 x 20AWG wire					

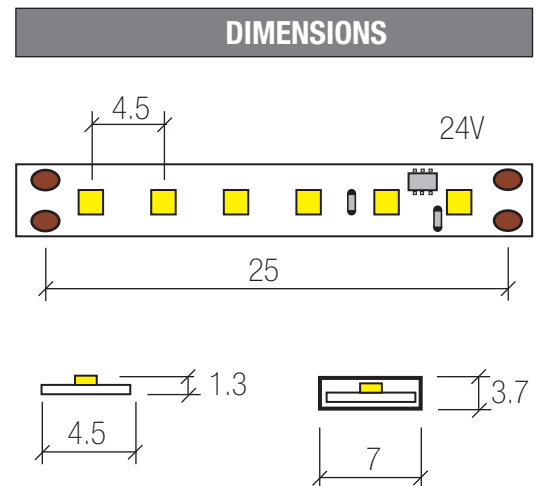

#### FEATURES:

- # 240 LEDs/m.
- # Narrow profile for slim line detail.

#### NOTE:

\*\* This linear LED product must be installed in an appropriate TASK Lighting or similar approved LED mounting profile/channel to dissipate heat. Failure to do so may result in a much shorter LED life, colour shift and void the warranty.

#### APPLICATIONS:

- # Under exterior bench seating.
- # Under exterior stair treads.
- # Under eaves.
- # Bathrooms.
- # Pergolas.