

LS200E


RGB 48V Exterior LED Strip



Features

- Ideal for long single feed runs
- High efficacy up to 50Lm/w
- 5 year warranty
- PWM Dimmable
- IP65 Silicone Sleeve

Dimensions

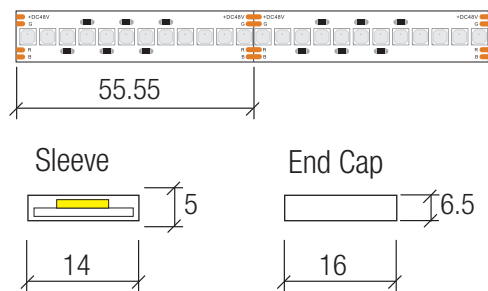

Specification

Code	LS200E-48V-8W-RGB				LS200E-48V-15W-RGB				LS200E-48V-24W-RGB			
W/m	8W				15W				24W			
Wave Length (nm)	RGB=480	R=620	G=525	B=465	RGB=480	R=620	G=525	B=465	RGB=480	R=620	G=525	B=465
Lm/m	393	71	270	52	750	135	510	100	1200	216	816	160
Max Run	15m				12m				9m			
Binning	+/-5nm											
Operating Temp	-25 to 65°C											
Ambient Temp	-25 to 45°C											
Expected Life	L70B10 @ 50,000hrs											
Voltage	48VDC (47 to 49VDC)			LED Type	3838 SMD		IP Rating		65			
LEDs/m	216			Cut Points	55.55mm		Copper Tape		2oz			
Min Bend Radius	50mm			Dimming	PWM		Installation		3M 300LSE adhesive tape			

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors. Task Lighting also reserves the right to modify/delete product details without notice.