


LumiSheet

24VDC RGBW LED Sheet



The Lumisheet RGBW LED Sheet features even lighting, longer lifespan and high efficacy. It is designed to provide consistent linear lighting for limited spaces in a wide variety of applications for cove lighting and indirect lighting in hotels, restaurants, shops, offices and homes.

Features

- 512LEDs/m
- 24V Constant Voltage
- Quad RGBW LEDs
- LED spacing every 30mm
- Dimmable via 0-10V, DALI and PWM
- 3 Year warranty


Product Information

| Code | LDLS-RGBW-36W-IP54SS | | |
|-------------------|----------------------|--|--|
| Power consumption | 36W | | |
| CCT | R/G/B/W = 4000K | | |
| Lumen output/m | 1830Lm/m | | |
| Efficacy | 55Lm/W | | |
| Max Run in series | 1PCS (1.4A) | | |
| CRI (White) | Ra > 80, R9 >0 | | |
| TM30 (White) | Rf=82, Rg=94 | | |
| TLCI(Qa) | 70 | | |
| Warranty | 3 Years | | |

Electrical Information

| Nominal input voltage | 24V DC | Voltage range | 23-25VDC |
|-----------------------|----------------|---------------------|--|
| LED type | 2835 SMD | Product dimension | L480*W240*H6.7mm |
| LED QTY/m | 512 | Operating temp | -25° ~ 70°C |
| IP rating | IP54 | Cut points | 30mm |
| Beam angle | 120° | Material of coating | Silicone spray |
| Bend radius | R<50mm | Connection | 5 x 0.5MM2 / 22AWG wire / DC connector |
| Dimming function | PWM/0-10V/DALI | Installation | 3M 300LSE adhesive tape |

Dimensions

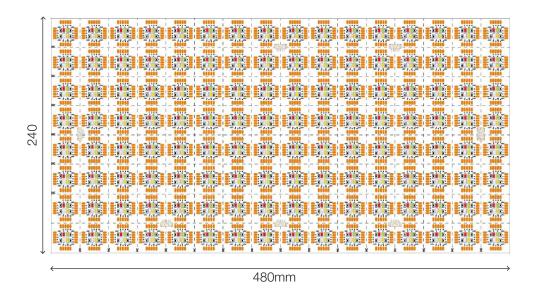

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors.

Task Lighting also reserves the right to modify/delete product details without notice.