

Specifiers Linear Series - LS131 - Interior




- IP20
- 24V
- DIM
- 240LED/m
- ✂ 25mm 24V

19.2W - High Density 240LEDs/m - Dot Free

SPECIFICATION				
COLOUR	2700K	3000K	4000K	5500K
CODE	LS131WW24-27K	LS131WW24	LS131NW24	LS131W24
WATTS	19.2W/m			
VOLTS INPUT	24VDC			
AMPS INPUT	0.8Amps/m			
COLOUR TOLERANCE	+/- 100K	+/- 100K	+/- 100K	+/- 200K
CRI	>90			
LUMENS	1820lm/m	1820lm/m	1920lm/m	2000lm/m
EFFICACY	91lm/w	91lm/w	96lm/w	100lm/w
BEAM ANGLE	120°			
IP RATING	IP20 Indoor Use Only			
DIM PWM	Yes			
WORKING TEMPERATURE	-25°C to + 60°C			
LED TYPE	Epistar 3528			
LUMEN MAINTENANCE	L70 @ 50,000hrs			
WARRANTY	5years			
MAX RUN LENGTH	5m			
LED PITCH	4mm & 240 LEDs/m			
CUT LENGTH	25mm (6 LEDs)			
FIXING	3M doubled sided tape			
CONNECTION	0.5mm ² red/black 2 core tail			

DIMENSIONS

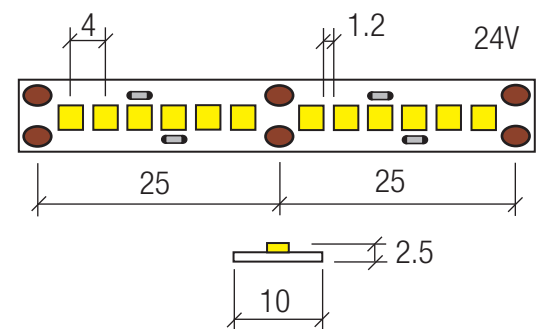

FEATURES

- # High density 240 LEDs/m
- # Specifically designed to be dot free in shallow profiles

APPLICATIONS

- # Anywhere the LEDs are visible
- # Under cabinets over benches
- # Cove lighting

NOTE

This linear LED product must be installed in an appropriate TASK Lighting or similar approved LED mounting profile/channel to dissipate heat. Failure to do so may result in a much shortened LED life, colour shift and void the warranty.

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors. Task Lighting also reserves the right to modify/delete product details without notice.