

Specifiers Linear Series - LS133 - Exterior Thermo Sleeve




- IP65
- 24V
- CRI 90
- ✂ 25mm
- 240LED/m
- DIM (PWM)

19.2W - High Density 240LEDs/m - Dot Free - IP65

SPECIFICATION				
COLOUR	2700K	3000K	4000K	5500K
CODE	LS133WW24-27K	LS133WW24	LS133NW24	LS133W24
WATTS	19.2W/m			
VOLTS INPUT	24VDC			
AMPS INPUT	0.8Amps/m			
COLOUR TOLERANCE	+/- 100K	+/- 100K	+/- 100K	+/- 200K
CRI	>90			
LUMENS	1720lm/m	1720lm/m	1820lm/m	1900lm/m
EFFICACY	86lm/w	86lm/w	91lm/w	95lm/w
BEAM ANGLE	120°			
IP RATING	IP65 Exterior weather proof in a silicone sleeve			
DIM PWM	Yes			
WORKING TEMPERATURE	-25° C to + 60° C			
LED TYPE	Epistar 3528			
LUMEN MAINTENANCE	L70 @ 50,000hrs			
WARRANTY	5years			
MAX RUN LENGTH	5m			
LED PITCH	4mm & 240 LEDs/m			
CUT LENGTH	25mm (6 LEDs)			
FIXING	3M doubled sided tape			
CONNECTION	0.5mm ² red/black 2 core tail			

DIMENSIONS

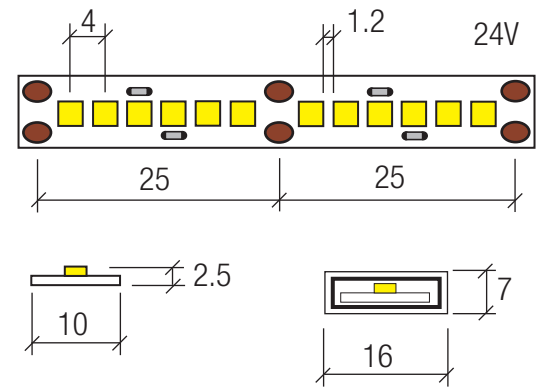

FEATURES

- # High density 240 LEDs/m
- # New Thermo Sleeve technology increasing heat transfer from the LEDs helping to extend the life
- # Specifically designed to be dot free even in shallow profiles and channels with an opal diffuser giving a smooth fluorescent like illumination

APPLICATIONS

- # Under exterior bench seating
- # Under exterior stair treads
- # Under eaves
- # Bathrooms
- # Pergolas

NOTE

This linear LED product must be installed in an appropriate TASK Lighting or similar approved LED mounting profile/channel to dissipate heat. Failure to do so may result in a much shortened LED life, colour shift and void the warranty.

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors. Task Lighting also reserves the right to modify/delete product details without notice.