



LS100MS

6W/m Silicone Spray Micro LED Strip

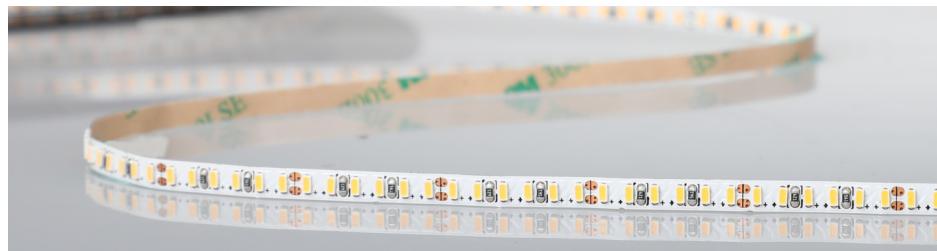

Dimensions

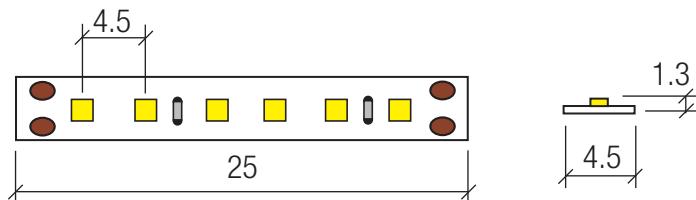

Specification

COLOUR TEMPERATURE	2700K	3000K	4000K
CODE	LS100MS-24V-6W-27K	LS100MS-24V-6W-3K	LS100MS-24V-6W-4K
WATTS	6W/m		
VOLTS INPUT	24VDC		
AMPS INPUT	0.26Amps/m		
COLOUR TOLERANCE	+/- 100K		
CRI	>90		
LUMENS	570lm/m	570lm/m	600lm/m
EFFICACY	95lm/w	95lm/w	100lm/w
BEAM ANGLE	120°		
IP RATING	IP54 (Silicone spray)		
DIM PWM	Yes		
WORKING TEMPERATURE	-25° C - +60° C		
LED TYPE	3080		
LUMEN MAINTENANCE	L70B10 @ 50,000 Hrs		
WARRANTY	5 years		
MAX RUN	5m		
LED PITCH	4.5mm & 240 LEDs/m		
CUT LENGTH	25mm (6 LEDs)		
FIXING	3M doubled sided tape		
CONNECTION	0.5mm ² red/black 2 core tail		

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors. Task Lighting also reserves the right to modify/delete product details without notice.