

Specifiers Linear Series - LS106 - Silicone Spray



240LED/m

✂ 25mm

IP54

24V


6.3W

DIM

Micro Strip - 6.3W - 240LEDs/m

SPECIFICATION			
COLOUR TEMPERATURE	2700K	3000K	4000K
CODE	LS106-6.3W-27K	LS106-6.3W-3K	LS106-6.3W-4K
WATTS	6.3W/m		
VOLTS INPUT	24VDC		
AMPS INPUT	0.26Amps/m		
COLOUR TOLERANCE	+/- 100K		
CRI	>90		
LUMENS	570lm/m	570lm/m	600lm/m
EFFICACY	95lm/w	95lm/w	100lm/w
BEAM ANGLE	120°		
IP RATING	IP54 (Silicone spray)		
DIM PWM	Yes		
WORKING TEMPERATURE	-25° C - +60° C		
LED TYPE	3080		
LUMEN MAINTENANCE	L70 @ 50,000hrs		
WARRANTY	5 years		
MAX RUN	5m		
LED PITCH	4.5mm & 240 LEDs/m		
CUT LENGTH	25mm (6 LEDs)		
FIXING	3M doubled sided tape		
CONNECTION	0.5mm ² red/black 2 core tail		

DIMENSIONS

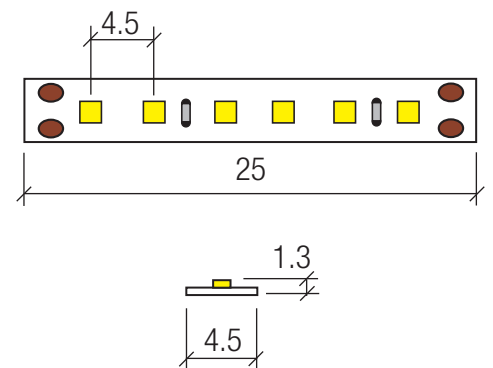

FEATURES

- # Narrow profile for slim line detail
- # Compatible with our LEDCHAN650 & LEDCHAN720 Micro Profiles

NOTE

This linear LED product must be installed in an appropriate TASK Lighting or similar approved LED mounting profile/channel to dissipate heat. Failure to do so may result in a much shortened LED life, colour shift and void the warranty.

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors. Task Lighting also reserves the right to modify/delete product details without notice.