


Specifiers Linear Series - LS106 - Silicone Spray



- IP54
- 24V
- DIM
- 140LED/m
- ✂ 50mm 24V

15W/m - 140LEDs/m - High Power

SPECIFICATION				
COLOUR TEMPERATURE	2700K	3000K	4000K	6500K
CODE (24V)	LS106-15W-27K	LS106-15W-3K	LS106-15W-4K	LS106-15W-65K
WATTS	15W/m			
VOLTS INPUT	24VDC			
AMPS INPUT	0.6Amps/m			
COLOUR TOL	+/- 100K			+/- 200K
CRI	>90			
LUMENS	1440lm/m	1440lm/m	1515lm/m	1590lm/m
EFFICACY	96lm/w	96lm/w	101lm/w	106m/w
BEAM ANGLE	120°			
IP RATING	IP54 (Silicone Spray)			
DIM PWM	Yes			
WORKING TEMPERATURE	-25° C to +60° C			
LED TYPE	Epistar 5050			
LUMEN MAINTENANCE	L70 @ 50,000hrs			
WARRANTY	5years			
MAX RUN	10m			
LED PITCH	16.5mm & 140 LEDs/m			
CUT LENGTH	50mm (7 LEDs)			
FIXING	3M doubled sided tape			
CONNECTION	0.5mm ² red/black 2 core tail			

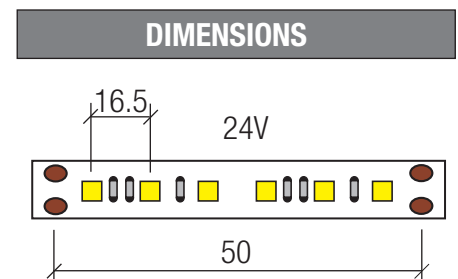

NOTE

This linear LED product must be installed in an appropriate TASK Lighting or similar approved LED mounting profile/channel to dissipate heat. Failure to do so may result in a much shorter LED life, colour shift and void the warranty.

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors. Task Lighting also reserves the right to modify/delete product details without notice.