


Specifiers Linear Series - LS131 - Silicone Spray



- IP54
- 24V
- DIM
- 240LED/m
- ✂ 25mm 24V

19.2W - High Density 240LEDs/m - Dot Free

SPECIFICATION				
COLOUR	2700K	3000K	4000K	6500K
CODE	LS106-19.2W-27K	LS106-19.2W-3K	LS106-19.2W-4K	LS106-19.2W-65K
WATTS	19.2W/m			
VOLTS INPUT	24VDC			
AMPS INPUT	0.8Amps/m			
COLOUR TOL	+/- 100K			+/- 200K
CRI	>90			
LUMENS	1728lm/m	1728lm/m	1843lm/m	1920lm/m
EFFICACY	90lm/w	90lm/w	96lm/w	100lm/w
BEAM ANGLE	120°			
IP RATING	IP54 (Silicone Spray)			
DIM PWM	Yes			
WORKING TEMPERATURE	-25°C to + 60°C			
LED TYPE	Epistar 3528			
LUMEN MAINTENANCE	L70 @ 50,000hrs			
WARRANTY	5years			
MAX RUN LENGTH	5m			
LED PITCH	4mm & 240 LEDs/m			
CUT LENGTH	25mm (6 LEDs)			
FIXING	3M doubled sided tape			
CONNECTION	0.5mm ² red/black 2 core tail			

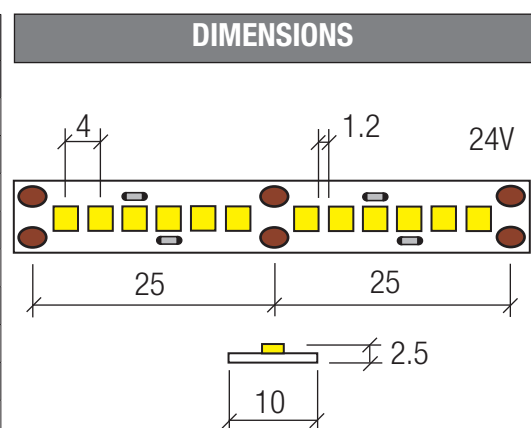

NOTE

This linear LED product must be installed in an appropriate TASK Lighting or similar approved LED mounting profile/channel to dissipate heat. Failure to do so may result in a much shortened LED life, colour shift and void the warranty.

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors. Task Lighting also reserves the right to modify/delete product details without notice.