



# OptiFlex | Static White



● 2700K ● 3000K ● 3500K ● 4000K ● 4500K  
● 5000K

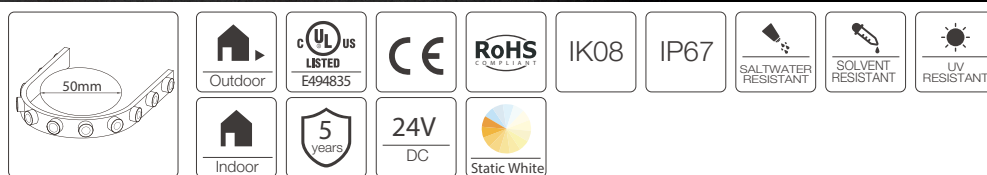


|                 |                                                                          |                                                                                                       |
|-----------------|--------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------|
| Code            | LDOF24-27K-18W<br>LDOF24-3K-18W<br>LDOF24-35K-18W<br>LDOF24-4K-18W       | LDOF48-27K-18W<br>LDOF48-3K-18W<br>LDOF48-35K-18W<br>LDOF48-4K-18W<br>LDOF48-45K-24W<br>LDOF48-5K-24W |
| Wattage         | 18W/m                                                                    | 18W/24/m (Max 24W/m)                                                                                  |
| Width           | 20mm                                                                     | 20mm                                                                                                  |
| Lumen output    | 1584 Lm/m 2700K<br>1692 Lm/m 3000K<br>1728 Lm/m 4000K<br>1764 Lm/m 5000K | 1680 Lm/m 2700K<br>1780 Lm/m 3000K<br>1820 Lm/m 4000K<br>1860 Lm/m 5000K                              |
| MAXRUN          | 5m                                                                       | 5m                                                                                                    |
| LEDs/m          | 2835 24LEDs/m                                                            | 2835 48LEDs/m                                                                                         |
| Cut Length      | 125mm (3 LEDs)                                                           | 62.5mm (3 LEDs)                                                                                       |
| Voltage         | 24 VDC                                                                   | 24 VDC                                                                                                |
| CRI (White)     | CRI 80+                                                                  | CRI 80+                                                                                               |
| CCT/Color       | 2700K~5000K                                                              | 2700K~5000K                                                                                           |
| IP Rating       | IP67                                                                     | IP67                                                                                                  |
| Dimmable        | Yes (PWM, DALI, 0/1-10V, Triac)                                          | Yes (PWM, DALI, 0/1-10V, Triac)                                                                       |
| Operating temp. | -35°C ~ 70°C                                                             | -35°C ~ 70°C                                                                                          |
| Beam Angle      | 15°, 30°, 45°, 60°, 20x45°, 20x45x10°                                    | 15°, 30°, 45°, 60°, 20x45°, 20x45x10°                                                                 |
| Lifespan        | 50,000Hrs                                                                | 50,000Hrs                                                                                             |


## Note

OptiFlex is not backed with adhesive tape, if required please advise when requesting pricing.


## Accessories



LDOF-CLIP




LDOF-BRACKET

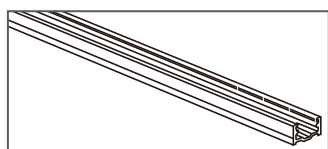

LDOF-PROFILE

## Cut points

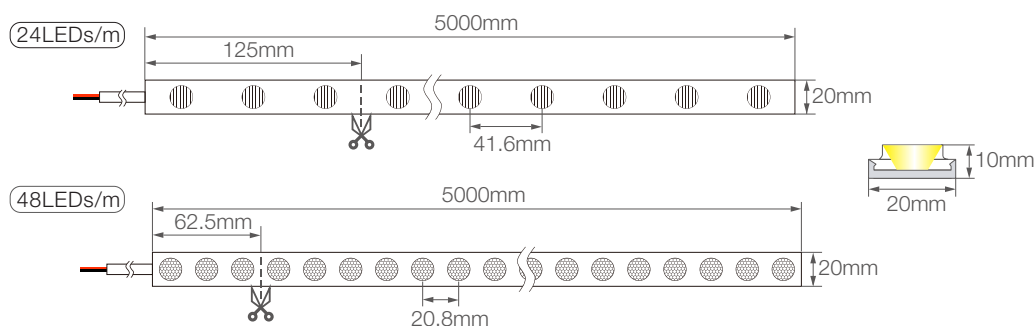

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors. Task Lighting also reserves the right to modify/delete product details without notice.