



● 2700K ● 3000K ● 3500K ● 4000K ● 4500K
● 5000K ● RGB

50mm

Outdoor

Indoor

UL LISTED
E494835

CE

RoHS
COMPLIANT

IK08

IP67

SALTWATER
RESISTANT

SOLVENT
RESISTANT

UV
RESISTANT

5
years


24V
DC

RGBW


Code	LDOF-RGBW-24W
Wattage	24W/m
Width	20mm
Lumen output (RGBW, W=4000K)	Total 1250Lm/m 570 Lm/m W 4000K 168 Lm/m R 432 Lm/m G 78 Lm/m B
MAXRUN	5m
LEDs/m	5050 28LEDs/m
Cut Length	250mm (7 LEDs)
Voltage	24 VDC
CRI (White)	CRI 80+
CCT/Color	RGB R: 620-625nm G: 520-525nm B: 465-470nm / White 2700~5000K
IP Rating	IP67
Dimmable	Yes (PWM, DALI, 0/1-10V, Triac)
Operating temp.	-35°C ~ 70°C
Beam Angle	30°, 60°, 20x45°
Lifespan	50,000Hrs

Note
OptiFlex is not backed with adhesive tape, if required please advise when requesting pricing.

Accessories

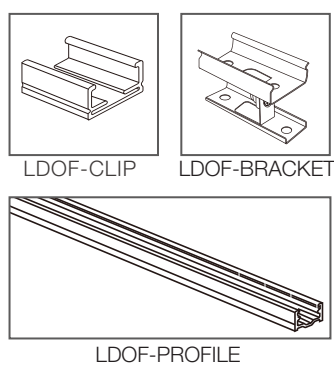

Cut points

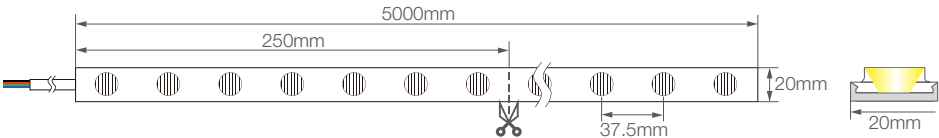

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors.
Task Lighting also reserves the right to modify/delete product details without notice.