





# HLINEAR

CREATIVE LIGHTING



35 Timothy Place, Avondale, Auckland, NZ.  
P: 09 820 0004 E: sales@tasklighting.co.nz

A CREATIVE LIGHTING PARTNER

WHAT YOU HAVE

**WE KNOW**

WHAT YOU NEED

WHAT WE ARE

**PURSUING**

IS REVOLUTION

# Us

CB CE  RoHS **FLICKER FREE** **5 YEARS WARRANTY**


Established in 2001, HLINEAR is a professional manufacturer and exporter that is concerned with the design, development and production of LED lighting fixtures and components. Our factory is located in the City of Aluminum, FoShan, China, covering an area of 2000 square meters, and around 100 employees. We focus on aluminum lighting fixtures with variety of linear and curved linear designs for general, ambient, task, and architectural applications in commercial and institutional spaces. Our capabilities span the design, engineering, and manufacture of Surface, Pendant, and Recessed lighting systems. Our well-equipped facilities and excellent quality control throughout all stages of production enables us to guarantee total customer satisfaction.

As a result of our high quality products and outstanding customer service, we have gained a global sales network reaching Europe, North America, South America, Asia and Middle East. If you are interested in any of our products or would like to discuss a custom order, please feel free to contact us. We are looking forward to forming successful business relationships with new clients around the world in the near future.

**A CREATIVE LIGHTING PARTNER**

**HLINEAR**  
HLINEAR LIGHTING CO.,LTD



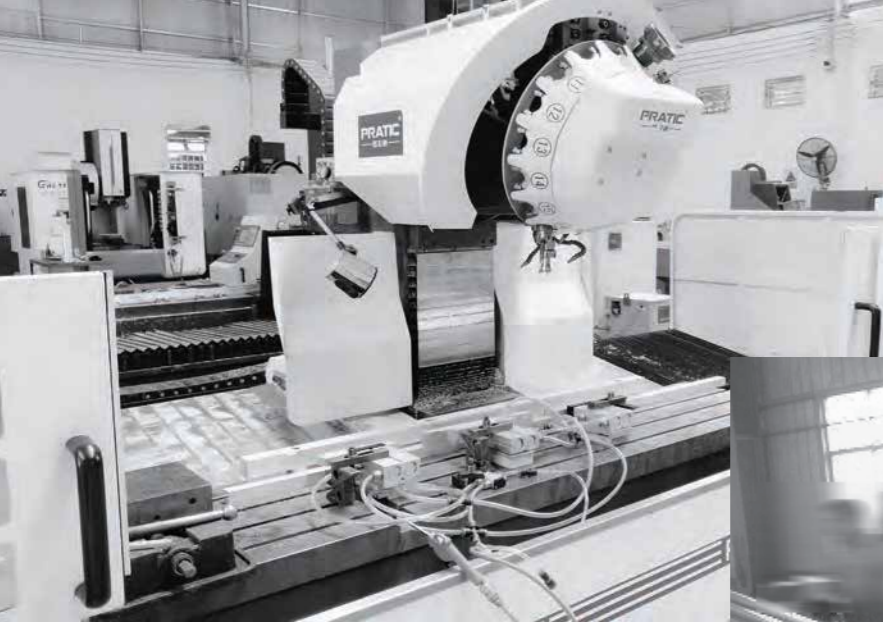


◀ CNC procedure



▶ Bending procedure



◀ Soldering procedure

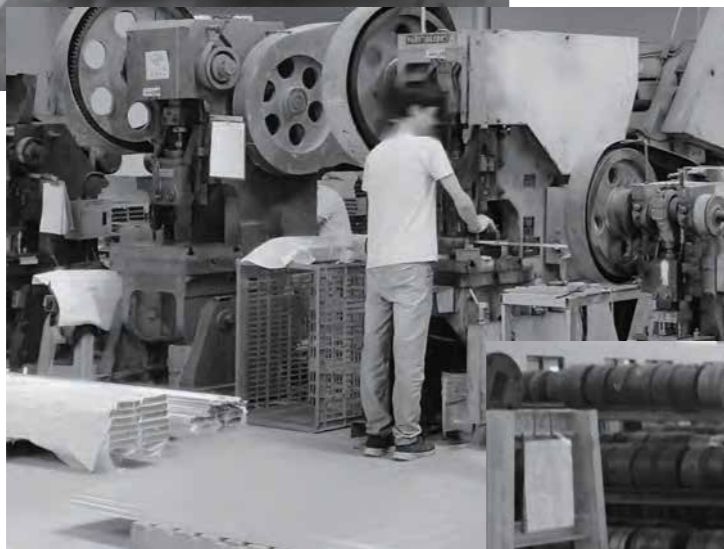

◀ Stamping procedure



▶ Moulding procedure



◀ Aging products




▶ Packing procedure




◀ Finished products

SHAPES OF LINEAR LIGHTING

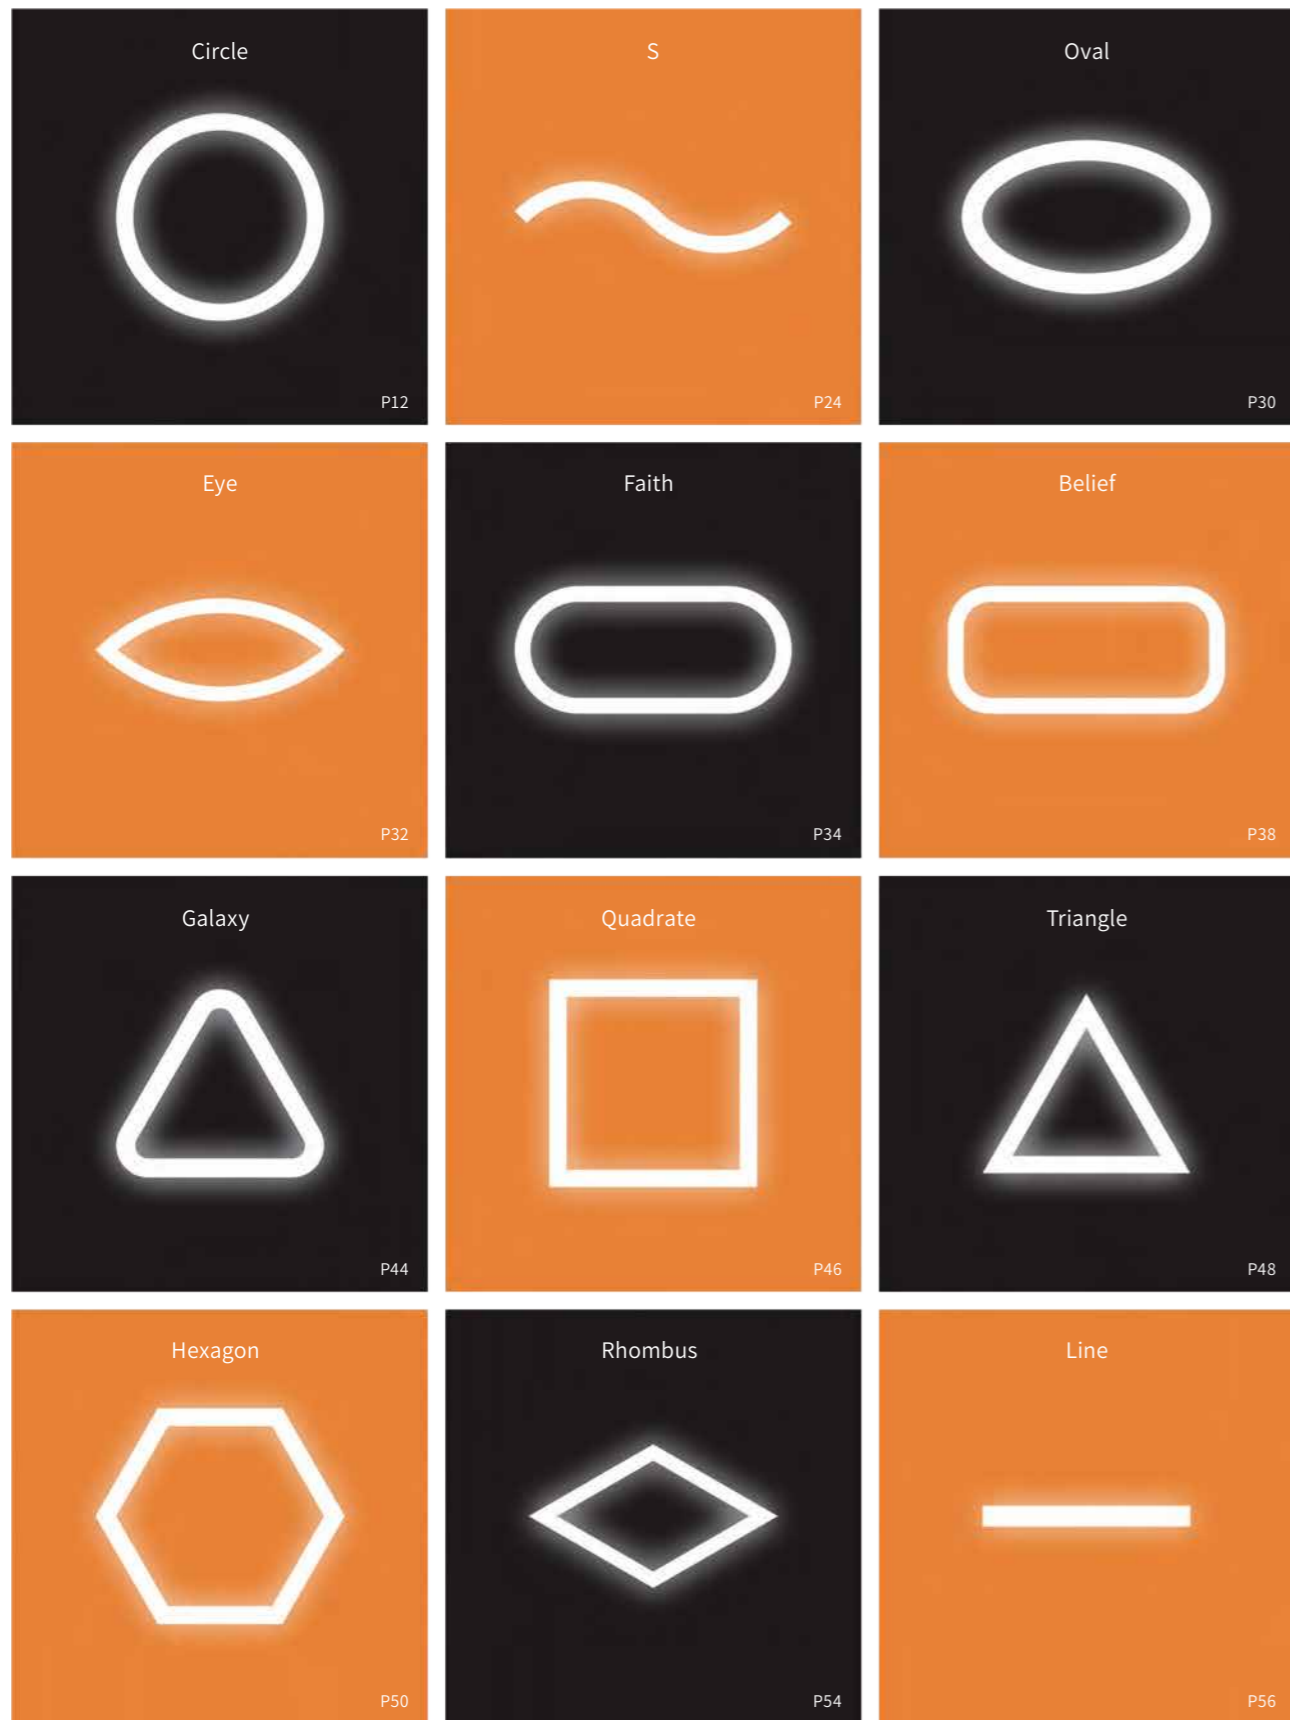

SHAPES OF PANEL LIGHTING

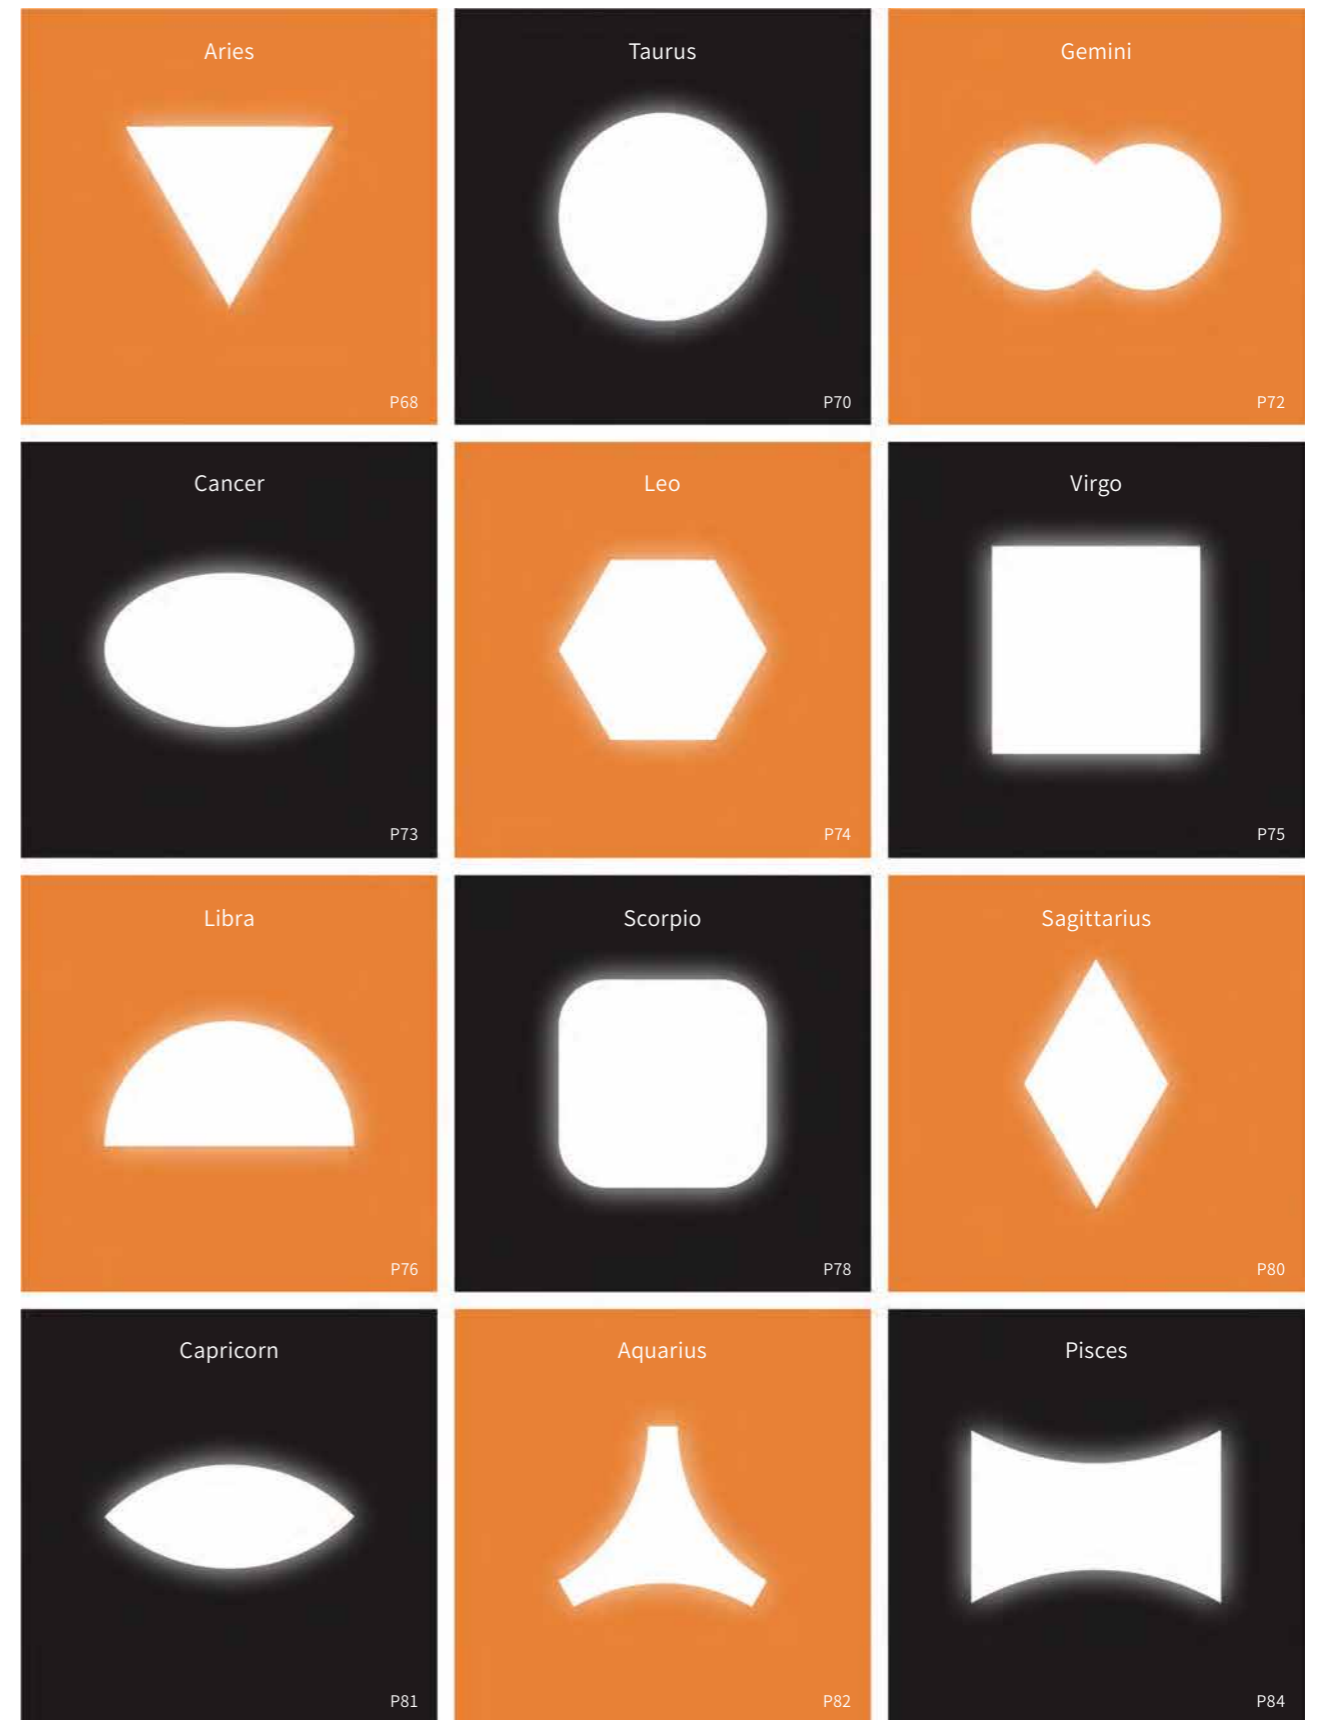

# COLOURFUL

CB CE  RoHS **FLICKER FREE** **5 YEARS WARRANTY**

White

Black

Gold

Silver

Blue

Pink

Purple


Champagne  
gold

Light blue

Light green

Breen


Orange

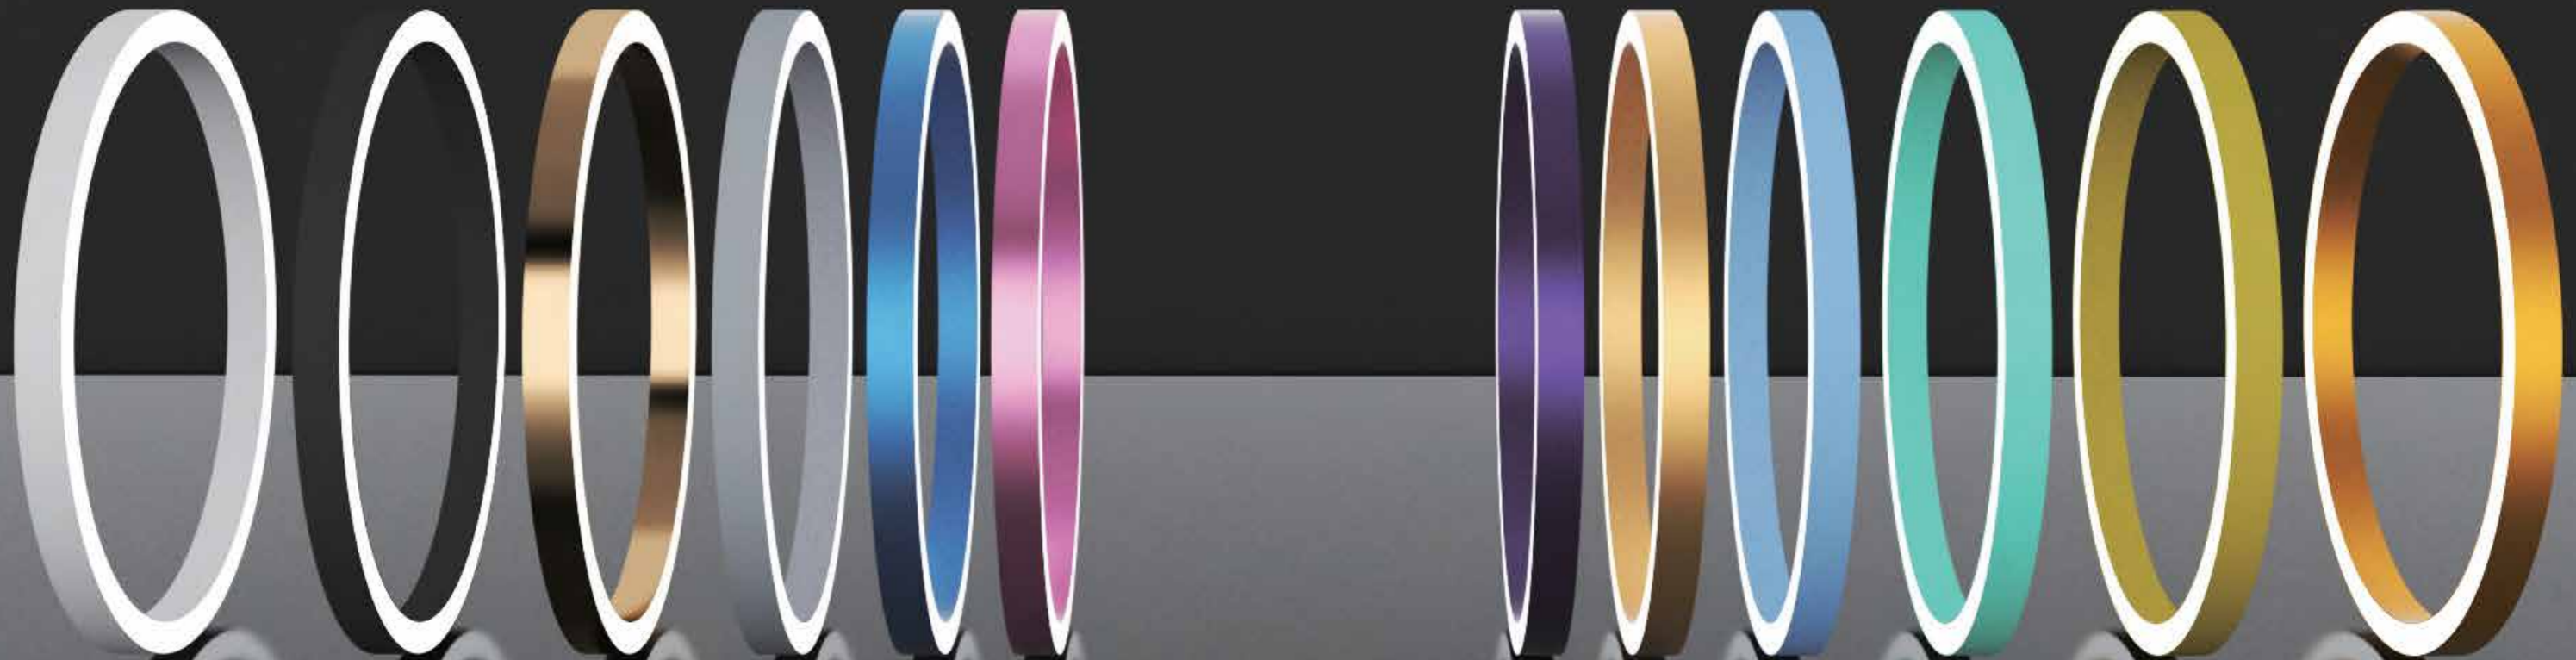

## Circle-Pendant

- ◆ Diameter 0.45m/0.6m/0.9m/1.0m/1.2m/1.5m/1.8m/2.0m/2.4m/3.0m/4.0m/5.0m/6.0m/7.0m alternative ;
- ◆ Order without MOQ, 1 pcs is available ;
- ◆ Pendant/Surface mounted/Recessed installation ;
- ◆ Power supply built-in luminaire / ceiling box optional ;
- ◆ Luminaire efficacy up to 120 lm/W, uniform luminous area and no flicker ;
- ◆ High-quality surface treatment, colors of white/black /silver/gold and customized ;
- ◆ 0.45m-1.2m profile & cover 1 part design, more perfect visual performance ;
- ◆ 1.5m-7.0m parts-connection design, smaller package & cheaper shippment ;
- ◆ Dali/Push/Remote/Triac/0-10V/Tunable/Emergency dimming available ;
- ◆ Luminous area ratio at least 91.7% (eg. LC6060 LC6080) ;
- ◆ More convenient for connection & installation ;
- ◆ 5 years warranty .


# Installations

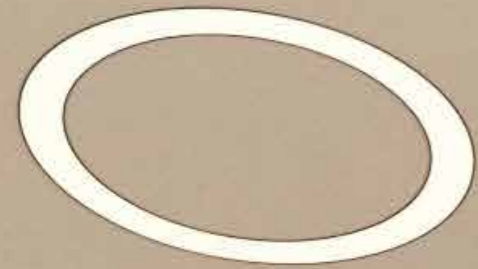

Recessed



Wall/Ceiling

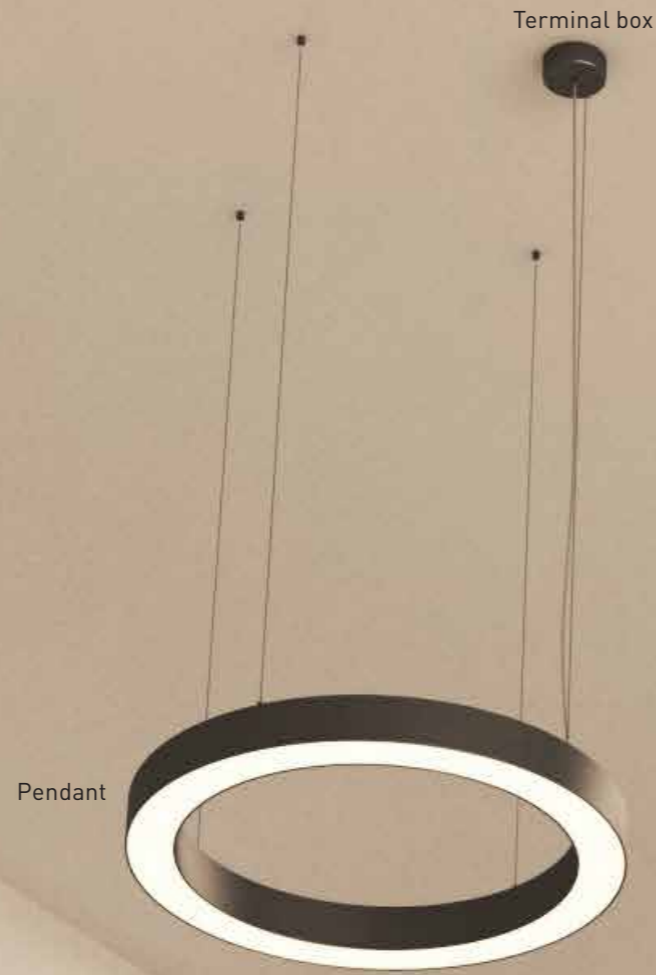

Pendant

Terminal box




Wall



Wire holder

Ceiling box

Hanging

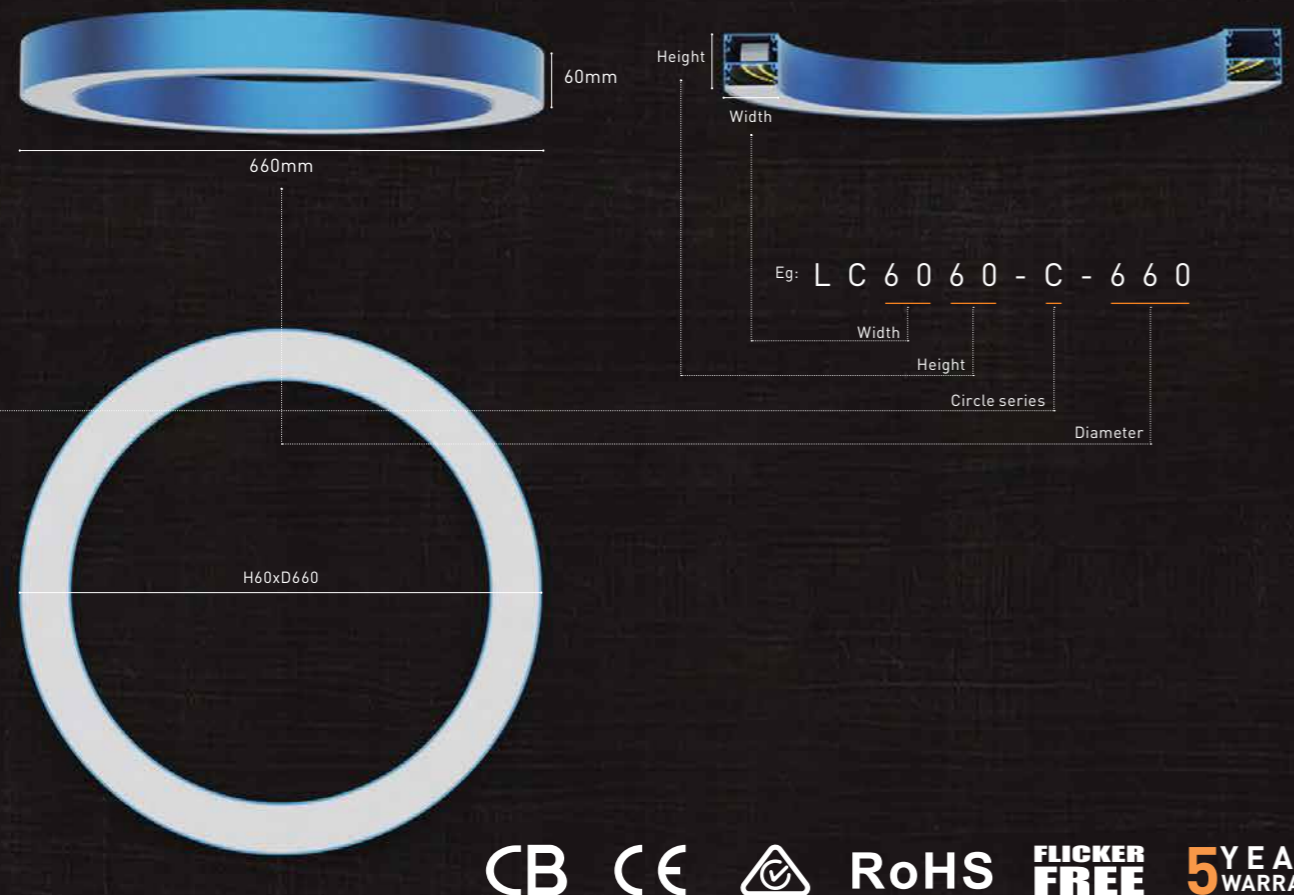

Ordering code for circle series-Pendant



\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LC4060-C-450		H60xD450	10	1000						
LC4060-C-600		H60xD600	15	1500						
LC4060-C-740		H60xD740	20	2000						
LC4060-C-900		H60xD900	25	2500						
LC4060-C-1000		H60xD1000	30	3000						
LC4060-C-1200		H60xD1200	35	3500						
LC4060-C-1540		H60xD1540	40	4000						
LC4060-C-1840		H60xD1840	55	5500						
LC4060-C-2040		H60xD2040	60	6000						
LC4060-C-2440		H60xD2440	75	7500						
LC4060-C-3040		H60xD3040	90	9000						
LC4060-C-4040		H60xD4040	120	12000						
LC4060-C-5040		H60xD5040	160	16000						
LC4060-C-6040		H60xD6040	180	18000						
LC4060-C-7040		H60xD7040	240	24000						
LC6060-C-450		H60xD450	20	2000						
LC6060-C-660		H60xD660	30	3000						
LC6060-C-900		H60xD900	40	4000	Non	2700K				
LC6060-C-1060		H60xD1060	50	5000	Dati	3000K			White	CE
LC6060-C-1200		H60xD1200	60	6000	Push	4000K	>80	200-240	Black	CB
LC6060-C-1560		H60xD1560	80	8000	Triac	6000K	>90	100-277	Silver	SAA
LC6060-C-1860		H60xD1860	110	11000	0-10V	6500K	>95		Gold	RCM
LC6060-C-2060		H60xD2060	120	12000	Remote	RGB				RoHS
LC6060-C-2460		H60xD2460	150	15000	Tunable	RGBW				
LC6060-C-3060		H60xD3060	180	18000	Emergency					
LC6060-C-4060		H60xD4060	240	24000						
LC6060-C-5060		H60xD5060	320	32000						
LC6060-C-6060		H60xD6060	360	36000						
LC6060-C-7060		H60xD7060	480	48000						
LC8060-C-680		H60xD680	30	3000						
LC8060-C-900		H60xD900	50	5000						
LC8060-C-1200		H60xD1200	80	8000						
LC8060-C-1580		H60xD1580	120	12000						
LC8060-C-1880		H60xD1880	160	16000						
LC8060-C-2080		H60xD2080	180	18000						
LC8060-C-2480		H60xD2480	225	22500						
LC8060-C-3080		H60xD3080	270	27000						
LC8060-C-4080		H60xD4080	360	36000						
LC8060-C-5080		H60xD5080	480	48000						
LC8060-C-6080		H60xD6080	540	54000						
LC8060-C-7080		H60xD7080	720	72000						

Accessories



Optical parameters

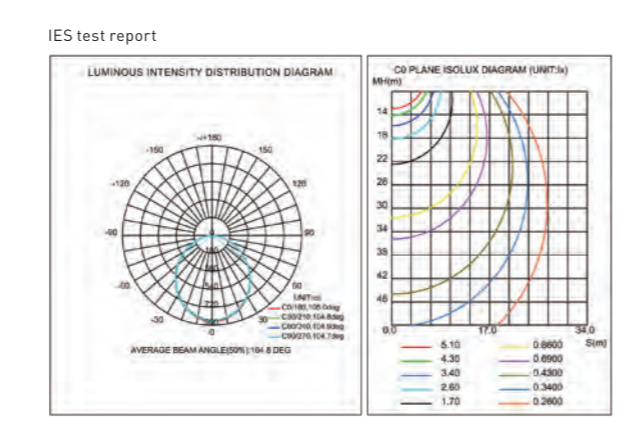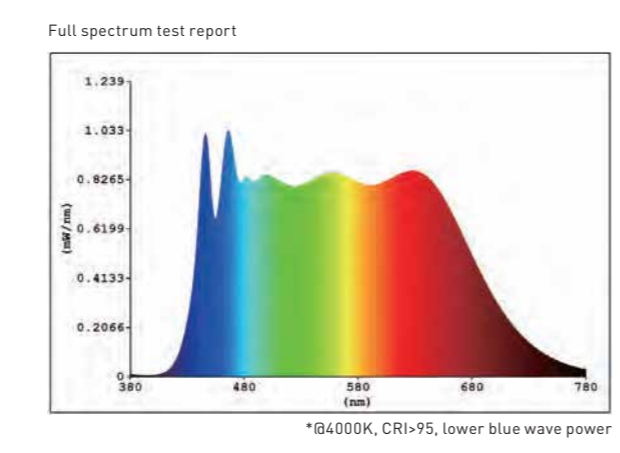

Ordering code for circle series-Pendant

\*Lumens @4000K, CRI 80



Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LC4080-C-450	H80xD450	10	1000	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4080-C-600	H80xD600	15	1500						
	LC4080-C-740	H80xD740	20	2000						
	LC4080-C-900	H80xD900	25	2500						
	LC4080-C-1000	H80xD1000	30	3000						
	LC4080-C-1200	H80xD1200	35	3500						
	LC4080-C-1540	H80xD1540	40	4000						
	LC4080-C-1840	H80xD1840	55	5500						
	LC4080-C-2040	H80xD2040	60	6000						
	LC4080-C-2440	H80xD2440	75	7500						
	LC4080-C-3040	H80xD3040	90	9000						
	LC4080-C-4040	H80xD4040	120	12000						
	LC4080-C-5040	H80xD5040	160	16000						
	LC4080-C-6040	H80xD6040	180	18000						
	LC4080-C-7040	H80xD7040	240	24000						
	LC6080-C-450	H80xD450	20	2000						
	LC6080-C-660	H80xD660	30	3000						
	LC6080-C-900	H80xD900	40	4000						
	LC6080-C-1060	H80xD1060	50	5000						
	LC6080-C-1200	H80xD1200	60	6000						
	LC6080-C-1560	H80xD1560	80	8000						
	LC6080-C-1860	H80xD1860	110	11000						
	LC6080-C-2060	H80xD2060	120	12000						
	LC6080-C-2460	H80xD2460	150	15000						
	LC6080-C-3060	H80xD3060	180	18000						
	LC6080-C-4060	H80xD4060	240	24000						
	LC6080-C-5060	H80xD5060	320	32000						
	LC6080-C-6060	H80xD6060	360	36000						
	LC6080-C-7060	H80xD7060	480	48000						
	LC8080-C-680	H80xD680	30	3000						
	LC8080-C-900	H80xD900	50	5000						
	LC8080-C-1200	H80xD1200	80	8000						
	LC8080-C-1580	H80xD1580	120	12000						
	LC8080-C-1880	H80xD1880	160	16000						
LC8080-C-2080	H80xD2080	180	18000							
LC8080-C-2480	H80xD2480	225	22500							
LC8080-C-3080	H80xD3080	270	27000							
LC8080-C-4080	H80xD4080	360	36000							
LC8080-C-5080	H80xD5080	480	48000							
LC8080-C-6080	H80xD6080	540	54000							
LC8080-C-7080	H80xD7080	720	72000							

Ordering code for circle series-Pendant

\*Lumens @4000K, CRI 80



Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX100	LC40100-C-450	H100xD450	10	1000	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC40100-C-600	H100xD600	15	1500						
	LC40100-C-740	H100xD740	20	2000						
	LC40100-C-900	H100xD900	25	2500						
	LC40100-C-1000	H100xD1000	30	3000						
	LC40100-C-1200	H100xD1200	35	3500						
	LC40100-C-1540	H100xD1540	40	4000						
	LC40100-C-1840	H100xD1840	55	5500						
	LC40100-C-2040	H100xD2040	60	6000						
	LC40100-C-2440	H100xD2440	75	7500						
	LC40100-C-3040	H100xD3040	90	9000						
	LC40100-C-4040	H100xD4040	120	12000						
	LC40100-C-5040	H100xD5040	160	16000						
	LC40100-C-6040	H100xD6040	180	18000						
	LC40100-C-7040	H100xD7040	240	24000						
	LC60100-C-450	H100xD450	20	2000						
	LC60100-C-660	H100xD660	30	3000						
	LC60100-C-900	H100xD900	40	4000						
	LC60100-C-1060	H100xD1060	50	5000						
	LC60100-C-1200	H100xD1200	60	6000						
	LC60100-C-1560	H100xD1560	80	8000						
	LC60100-C-1860	H100xD1860	110	11000						
	LC60100-C-2060	H100xD2060	120	12000						
	LC60100-C-2460	H100xD2460	150	15000						
	LC60100-C-3060	H100xD3060	180	18000						
	LC60100-C-4060	H100xD4060	240	24000						
	LC60100-C-5060	H100xD5060	320	32000						
	LC60100-C-6060	H100xD6060	360	36000						
	LC60100-C-7060	H100xD7060	480	48000						
	LC80100-C-680	H100xD680	30	3000						
	LC80100-C-900	H100xD900	50	5000						
	LC80100-C-1200	H100xD1200	80	8000						
	LC80100-C-1580	H100xD1580	120	12000						
	LC80100-C-1880	H100xD1880	160	16000						
LC80100-C-2080	H100xD2080	180	18000							
LC80100-C-2480	H100xD2480	225	22500							
LC80100-C-3080	H100xD3080	270	27000							
LC80100-C-4080	H100xD4080	360	36000							
LC80100-C-5080	H100xD5080	480	48000							
LC80100-C-6080	H100xD6080	540	54000							
LC80100-C-7080	H100xD7080	720	72000							

# Circle-Recessed

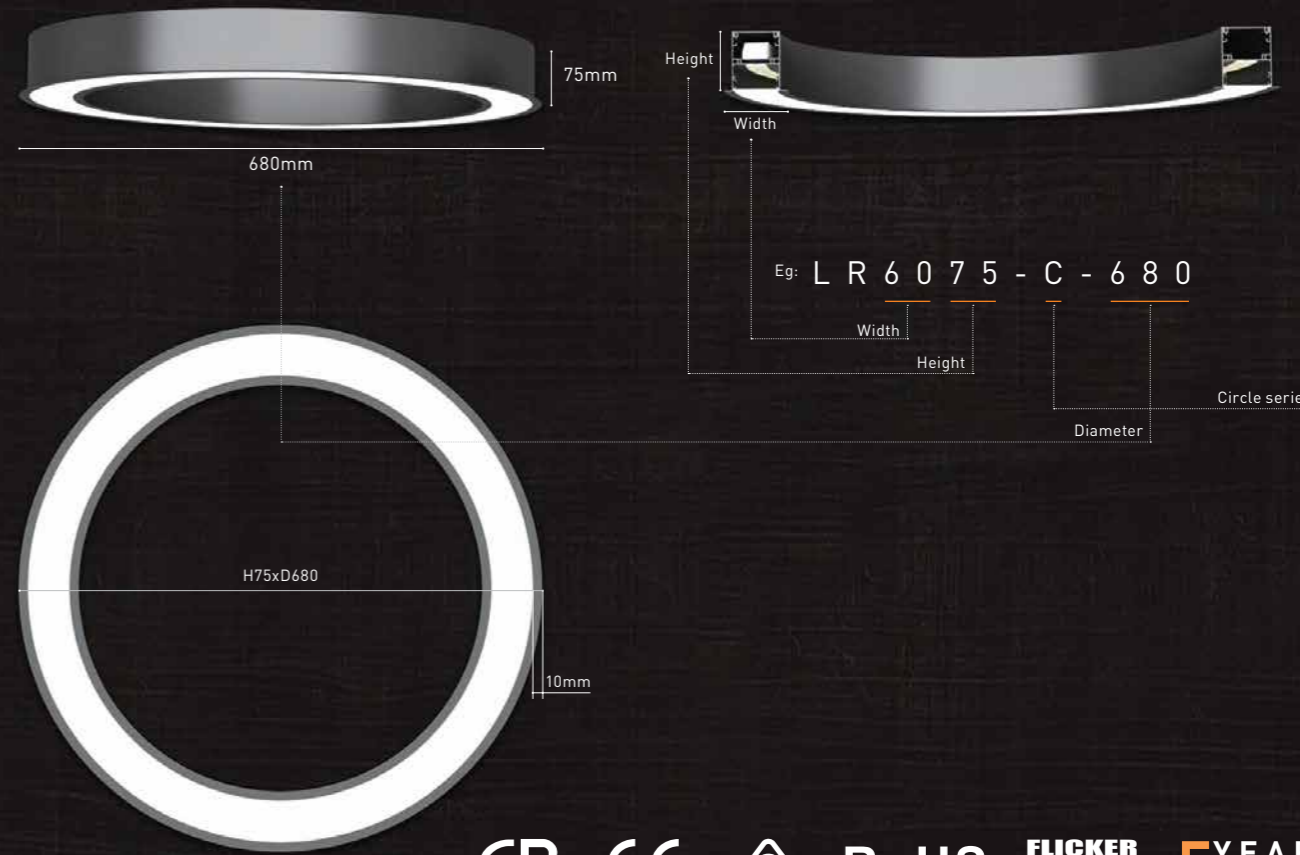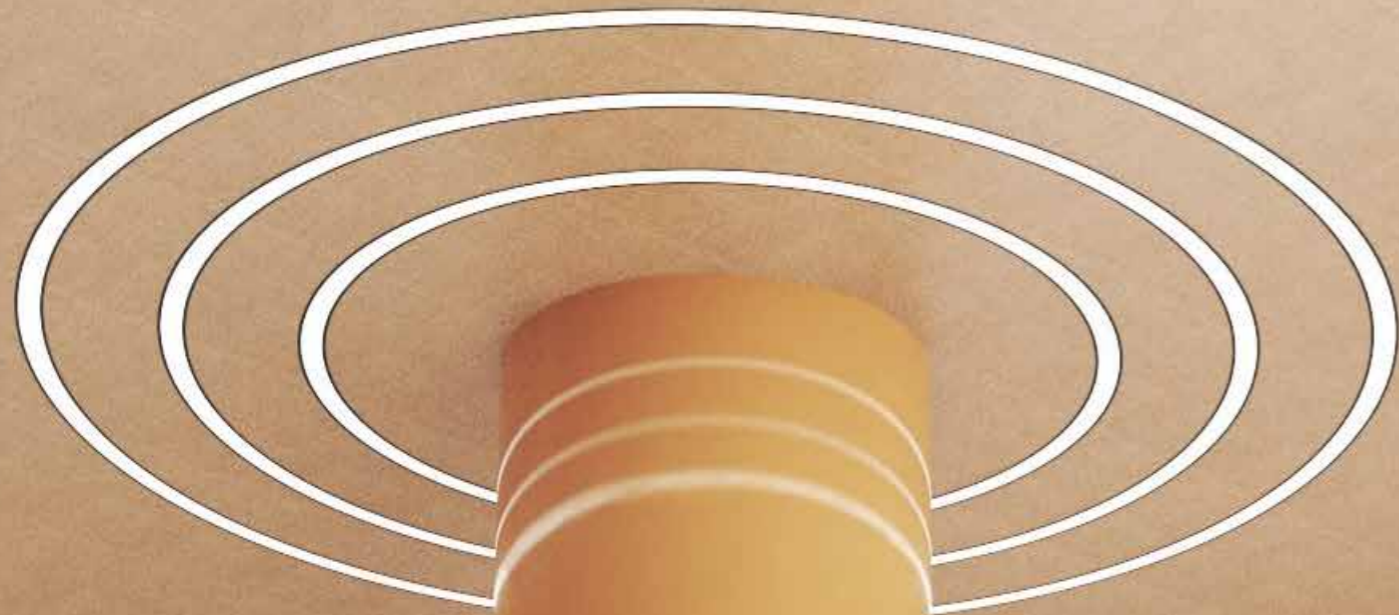


CB CE RoHS **FLICKER FREE** **5 YEARS WARRANTY**

### Accessories




### Optical parameters

Full spectrum test report

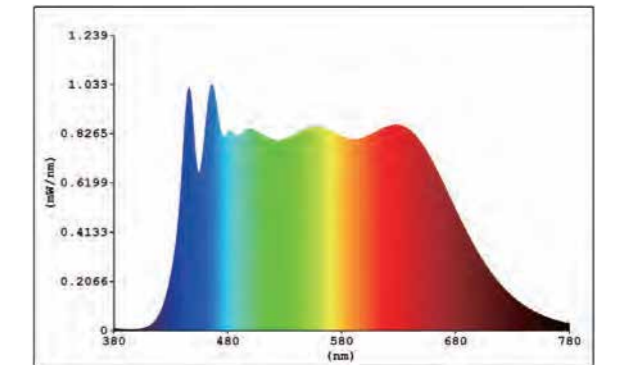

\*@4000K, CRI>95, lower blue wave power

IES test report

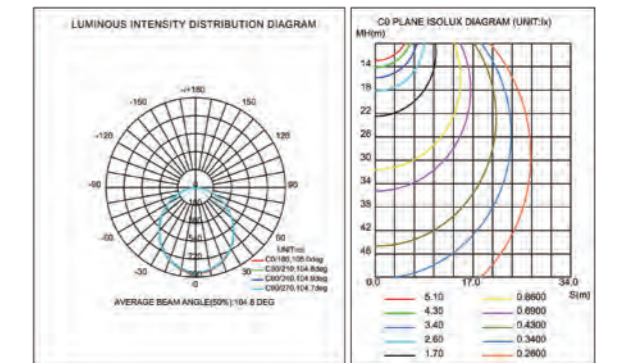

Ordering code for circle series-Recessed


\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LRXX35	LR6035-C-470	H35xD470	10	1000	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LR6035-C-620	H35xD620	15	1500						
	LR6035-C-760	H35xD760	20	2000						
	LR6035-C-920	H35xD920	25	2500						
	LR6035-C-1020	H35xD1020	30	3000						
	LR6035-C-1220	H35xD1220	35	3500						
	LR6035-C-1560	H35xD1560	40	4000						
	LR6035-C-1860	H35xD1860	55	5500						
	LR6035-C-2060	H35xD2060	60	6000						
	LR6035-C-2460	H35xD2460	75	7500						
	LR6035-C-3060	H35xD3060	90	9000						
	LR6035-C-4060	H35xD4060	120	12000						
	LR6035-C-5060	H35xD5060	160	16000						
	LR6035-C-6060	H35xD6060	180	18000						
	LR6035-C-7060	H35xD7060	240	24000						
	LR8035-C-470	H35xD470	20	2000						
	LR8035-C-680	H35xD680	30	3000						
	LR8035-C-920	H35xD920	40	4000						
	LR8035-C-1080	H35xD1080	50	5000						
	LR8035-C-1220	H35xD1220	60	6000						
	LR8035-C-1580	H35xD1580	80	8000						
	LR8035-C-1880	H35xD1880	110	11000						
	LR8035-C-2080	H35xD2080	120	12000						
	LR8035-C-2480	H35xD2480	150	15000						
	LR8035-C-3080	H35xD3080	180	18000						
	LR8035-C-4080	H35xD4080	240	24000						
	LR8035-C-5080	H35xD5080	320	32000						
	LR8035-C-6080	H35xD6080	360	36000						
	LR8035-C-7080	H35xD7080	480	48000						
	LR10035-C-700	H35xD700	30	3000						
	LR10035-C-920	H35xD920	50	5000						
	LR10035-C-1220	H35xD1220	80	8000						
	LR10035-C-1600	H35xD1600	120	12000						
	LR10035-C-1900	H35xD1900	160	16000						
LR10035-C-2100	H35xD2100	180	18000							
LR10035-C-2500	H35xD2500	225	22500							
LR10035-C-3100	H35xD3100	270	27000							
LR10035-C-4100	H35xD4100	360	36000							
LR10035-C-5100	H35xD5100	480	48000							
LR10035-C-6100	H35xD6100	540	54000							
LR10035-C-7100	H35xD7100	720	72000							

Ordering code for circle series-Recessed

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LRXX75	LR6075-C-470	H75xD470	10	1000	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LR6075-C-620	H75xD620	15	1500						
	LR6075-C-760	H75xD760	20	2000						
	LR6075-C-920	H75xD920	25	2500						
	LR6075-C-1020	H75xD1020	30	3000						
	LR6075-C-1220	H75xD1220	35	3500						
	LR6075-C-1560	H75xD1560	40	4000						
	LR6075-C-1860	H75xD1860	55	5500						
	LR6075-C-2060	H75xD2060	60	6000						
	LR6075-C-2460	H75xD2460	75	7500						
	LR6075-C-3060	H75xD3060	90	9000						
	LR6075-C-4060	H75xD4060	120	12000						
	LR6075-C-5060	H75xD5060	160	16000						
	LR6075-C-6060	H75xD6060	180	18000						
	LR6075-C-7060	H75xD7060	240	24000						
	LR8075-C-470	H75xD470	20	2000						
	LR8075-C-680	H75xD680	30	3000						
	LR8075-C-920	H75xD920	40	4000						
	LR8075-C-1080	H75xD1080	50	5000						
	LR8075-C-1220	H75xD1220	60	6000						
	LR8075-C-1580	H75xD1580	80	8000						
	LR8075-C-1880	H75xD1880	110	11000						
	LR8075-C-2080	H75xD2080	120	12000						
	LR8075-C-2480	H75xD2480	150	15000						
	LR8075-C-3080	H75xD3080	180	18000						
	LR8075-C-4080	H75xD4080	240	24000						
	LR8075-C-5080	H75xD5080	320	32000						
	LR8075-C-6080	H75xD6080	360	36000						
	LR8075-C-7080	H75xD7080	480	48000						
	LR10075-C-700	H75xD700	30	3000						
	LR10075-C-920	H75xD920	50	5000						
	LR10075-C-1220	H75xD1220	80	8000						
	LR10075-C-1600	H75xD1600	120	12000						
	LR10075-C-1900	H75xD1900	160	16000						
LR10075-C-2100	H75xD2100	180	18000							
LR10075-C-2500	H75xD2500	225	22500							
LR10075-C-3100	H75xD3100	270	27000							
LR10075-C-4100	H75xD4100	360	36000							
LR10075-C-5100	H75xD5100	480	48000							
LR10075-C-6100	H75xD6100	540	54000							
LR10075-C-7100	H75xD7100	720	72000							


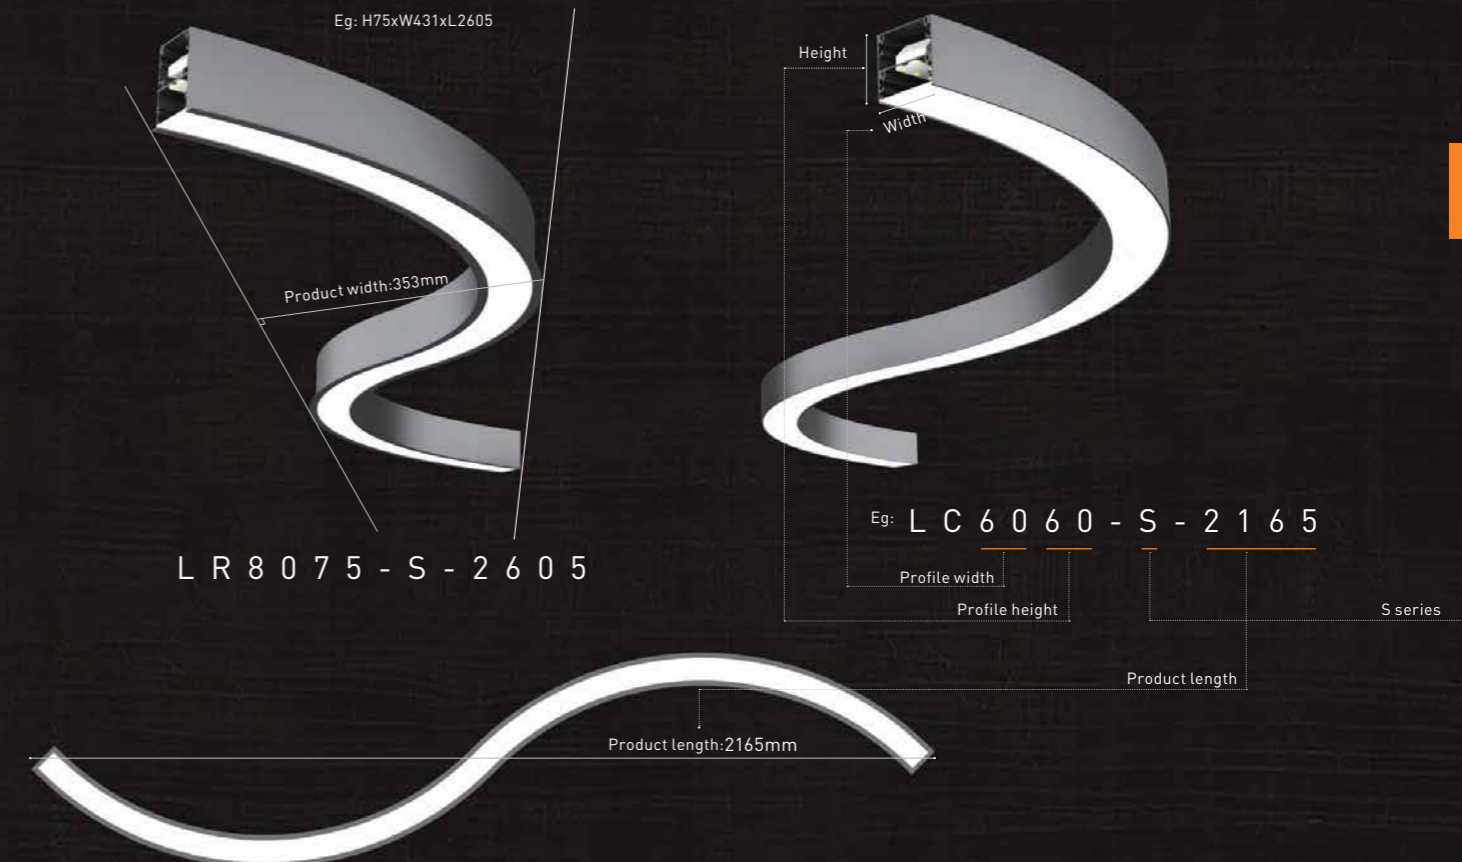


CB CE RoHS FLICKER FREE 5 YEARS WARRANTY

Accessories

<p>Pendant suit</p>	<p>Recessed clip-P</p>
<p>Ceiling box</p>	<p>Recessed clip-R</p>
<p>Ceiling clip</p>	<p>Terminal box</p>
<p>Connectors</p>	<p>Soft cover</p>

Optical parameters

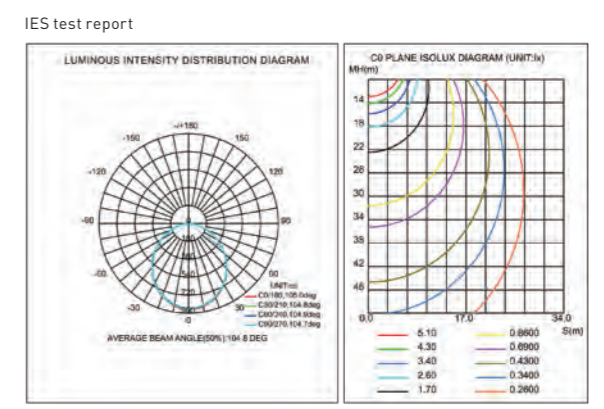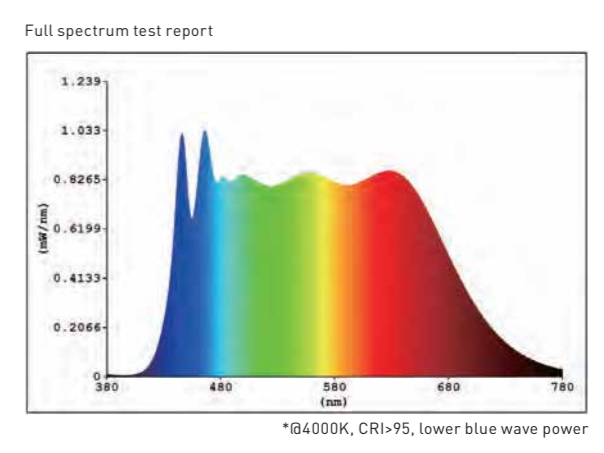

Ordering code for S series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC4060-S-610	H60xW118xL610	5	500	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4060-S-820	H60xW148xL820	7.5	750						
	LC4060-S-1250	H60xW270xL1250	13	1300						
	LC4060-S-1525	H60xW324xL1525	17	1700						
	LC4060-S-1700	H60xW358xL1700	20	2000						
	LC4060-S-2045	H60xW426xL2045	23	2300						
	LC4060-S-2150	H60xW336xL2150	20	2000						
	LC4060-S-2575	H60xW396xL2575	28	2800						
	LC4060-S-2860	H60xW436xL2860	30	3000						
	LC4060-S-3425	H60xW516xL3425	38	3800						
	LC4060-S-5235	H60xW1052xL5235	60	6000						
	LC4060-S-5685	H60xW836xL5685	60	6000						
	LC4060-S-7100	H60xW1036xL7100	80	8000						
	LC4060-S-8515	H60xW1236xL8515	90	9000						
	LC4060-S-9930	H60xW1436xL9930	120	12000						
	LC6060-S-600	H60xW131xL600	10	1000						
	LC6060-S-895	H60xW173xL895	15	1500						
	LC6060-S-1510	H60xW333xL1510	27	2700						
	LC6060-S-1785	H60xW388xL1785	34	3400						
	LC6060-S-2030	H60xW435xL2030	40	4000						
	LC6060-S-2165	H60xW353xL2165	40	4000						
	LC6060-S-2590	H60xW413xL2590	55	5500						
	LC6060-S-2875	H60xW453xL2875	60	6000						
	LC6060-S-3440	H60xW533xL3440	75	7500						
	LC6060-S-5250	H60xW1067xL5250	120	12000						
	LC6060-S-5700	H60xW853xL5700	120	12000						
	LC6060-S-7115	H60xW1053xL7115	160	16000						
	LC6060-S-8530	H60xW1253xL8530	180	18000						
	LC6060-S-9945	H60xW1453xL9945	240	24000						
	LC8060-S-910	H60xW190xL910	15	1500						
	LC8060-S-1495	H60xW342xL1495	34	3400						
	LC8060-S-2010	H60xW444xL2010	54	5400						
	LC8060-S-2180	H60xW371xL2180	60	6000						
	LC8060-S-2605	H60xW431xL2605	80	8000						
	LC8060-S-2890	H60xW471xL2890	90	9000						
	LC8060-S-3455	H60xW551xL3455	112	11200						
LC8060-S-5270	H60xW1083xL5270	180	18000							
LC8060-S-5715	H60xW871xL5715	180	18000							
LC8060-S-7130	H60xW1071xL7130	240	24000							
LC8060-S-8545	H60xW1271xL8545	270	27000							
LC8060-S-9960	H60xW1471xL9960	360	36000							

Ordering code for S series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LC4080-S-610	H80xW118xL610	5	500	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4080-S-820	H80xW148xL820	7.5	750						
	LC4080-S-1250	H80xW270xL1250	13	1300						
	LC4080-S-1525	H80xW324xL1525	17	1700						
	LC4080-S-1700	H80xW358xL1700	20	2000						
	LC4080-S-2045	H80xW426xL2045	23	2300						
	LC4080-S-2150	H80xW336xL2150	20	2000						
	LC4080-S-2575	H80xW396xL2575	28	2800						
	LC4080-S-2860	H80xW436xL2860	30	3000						
	LC4080-S-3425	H80xW516xL3425	38	3800						
	LC4080-S-5235	H80xW1052xL5235	60	6000						
	LC4080-S-5685	H80xW836xL5685	60	6000						
	LC4080-S-7100	H80xW1036xL7100	80	8000						
	LC4080-S-8515	H80xW1236xL8515	90	9000						
	LC4080-S-9930	H80xW1436xL9930	120	12000						
	LC6080-S-600	H80xW131xL600	10	1000						
	LC6080-S-895	H80xW173xL895	15	1500						
	LC6080-S-1510	H80xW333xL1510	27	2700						
	LC6080-S-1785	H80xW388xL1785	34	3400						
	LC6080-S-2030	H80xW435xL2030	40	4000						
	LC6080-S-2165	H80xW353xL2165	40	4000						
	LC6080-S-2590	H80xW413xL2590	55	5500						
	LC6080-S-2875	H80xW453xL2875	60	6000						
	LC6080-S-3440	H80xW533xL3440	75	7500						
	LC6080-S-5250	H80xW1067xL5250	120	12000						
	LC6080-S-5700	H80xW853xL5700	120	12000						
	LC6080-S-7115	H80xW1053xL7115	160	16000						
	LC6080-S-8530	H80xW1253xL8530	180	18000						
	LC6080-S-9945	H80xW1453xL9945	240	24000						
	LC8080-S-910	H80xW190xL910	15	1500						
	LC8080-S-1495	H80xW342xL1495	34	3400						
	LC8080-S-2010	H80xW444xL2010	54	5400						
	LC8080-S-2180	H80xW371xL2180	60	6000						
	LC8080-S-2605	H80xW431xL2605	80	8000						
	LC8080-S-2890	H80xW471xL2890	90	9000						
	LC8080-S-3455	H80xW551xL3455	112	11200						
LC8080-S-5270	H80xW1083xL5270	180	18000							
LC8080-S-5715	H80xW871xL5715	180	18000							
LC8080-S-7130	H80xW1071xL7130	240	24000							
LC8080-S-8545	H80xW1271xL8545	270	27000							
LC8080-S-9960	H80xW1471xL9960	360	36000							

Ordering code for S series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LRXX35	LR6035-S-625	H35xW135xL625	5	500	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LR6035-S-835	H35xW165xL835	7.5	750						
	LR6035-S-1265	H35xW285xL1265	13	1300						
	LR6035-S-1545	H35xW340xL1545	17	1700						
	LR6035-S-1715	H35xW375xL1715	20	2000						
	LR6035-S-2065	H35xW442xL2065	23	2300						
	LR6035-S-2165	H35xW353xL2165	20	2000						
	LR6035-S-2590	H35xW413xL2590	28	2800						
	LR6035-S-2875	H35xW453xL2875	30	3000						
	LR6035-S-3440	H35xW533xL3440	38	3800						
	LR6035-S-5250	H35xW1067xL5250	60	6000						
	LR6035-S-5700	H35xW853xL5700	60	6000						
	LR6035-S-7115	H35xW1053xL7115	80	8000						
	LR6035-S-8530	H35xW1253xL8530	90	9000						
	LR6035-S-9945	H35xW1453xL9945	120	12000						
	LR8035-S-615	H35xW148xL615	10	1000						
	LR8035-S-910	H35xW190xL910	15	1500						
	LR8035-S-1525	H35xW349xL1525	27	2700						
	LR8035-S-1805	H35xW403xL1805	34	3400						
	LR8035-S-2045	H35xW451xL2045	40	4000						
	LR8035-S-2180	H35xW371xL2180	40	4000						
	LR8035-S-2605	H35xW431xL2605	55	5500						
	LR8035-S-2890	H35xW471xL2890	60	6000						
	LR8035-S-3455	H35xW551xL3455	75	7500						
	LR8035-S-5270	H35xW1083xL5270	120	12000						
	LR8035-S-5715	H35xW871xL5715	120	12000						
	LR8035-S-7130	H35xW1071xL7130	160	16000						
	LR8035-S-8545	H35xW1271xL8545	180	18000						
	LR8035-S-9960	H35xW1471xL9960	240	24000						
	LR10035-S-925	H35xW208xL925	15	1500						
	LR10035-S-1510	H35xW357xL1510	34	3400						
	LR10035-S-2030	H35xW460xL2030	54	5400						
	LR10035-S-2195	H35xW388xL2195	60	6000						
	LR10035-S-2620	H35xW448xL2620	80	8000						
	LR10035-S-2905	H35xW488xL2905	90	9000						
	LR10035-S-3470	H35xW568xL3470	112	11200						
	LR10035-S-5285	H35xW1099xL5285	180	18000						
	LR10035-S-5730	H35xW888xL5730	180	18000						
	LR10035-S-7145	H35xW1088xL7145	240	24000						
	LR10035-S-8560	H35xW1288xL8560	270	27000						
LR10035-S-9975	H35xW1488xL9975	360	36000							

Ordering code for S series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LRXX75	LR6075-S-625	H75xW135xL625	5	500	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LR6075-S-835	H75xW165xL835	7.5	750						
	LR6075-S-1265	H75xW285xL1265	13	1300						
	LR6075-S-1545	H75xW340xL1545	17	1700						
	LR6075-S-1715	H75xW375xL1715	20	2000						
	LR6075-S-2065	H75xW442xL2065	23	2300						
	LR6075-S-2165	H75xW353xL2165	20	2000						
	LR6075-S-2590	H75xW413xL2590	28	2800						
	LR6075-S-2875	H75xW453xL2875	30	3000						
	LR6075-S-3440	H75xW533xL3440	38	3800						
	LR6075-S-5250	H75xW1067xL5250	60	6000						
	LR6075-S-5700	H75xW853xL5700	60	6000						
	LR6075-S-7115	H75xW1053xL7115	80	8000						
	LR6075-S-8530	H75xW1253xL8530	90	9000						
	LR6075-S-9945	H75xW1453xL9945	120	12000						
	LR8075-S-615	H75xW148xL615	10	1000						
	LR8075-S-910	H75xW190xL910	15	1500						
	LR8075-S-1525	H75xW349xL1525	27	2700						
	LR8075-S-1805	H75xW403xL1805	34	3400						
	LR8075-S-2045	H75xW451xL2045	40	4000						
	LR8075-S-2180	H75xW371xL2180	40	4000						
	LR8075-S-2605	H75xW431xL2605	55	5500						
	LR8075-S-2890	H75xW471xL2890	60	6000						
	LR8075-S-3455	H75xW551xL3455	75	7500						
	LR8075-S-5270	H75xW1083xL5270	120	12000						
	LR8075-S-5715	H75xW871xL5715	120	12000						
	LR8075-S-7130	H75xW1071xL7130	160	16000						
	LR8075-S-8545	H75xW1271xL8545	180	18000						
	LR8075-S-9960	H75xW1471xL9960	240	24000						
	LR10075-S-925	H75xW208xL925	15	1500						
	LR10075-S-1510	H75xW357xL1510	34	3400						
	LR10075-S-2030	H75xW460xL2030	54	5400						
	LR10075-S-2195	H75xW388xL2195	60	6000						
	LR10075-S-2620	H75xW448xL2620	80	8000						
	LR10075-S-2905	H75xW488xL2905	90	9000						
	LR10075-S-3470	H75xW568xL3470	112	11200						
	LR10075-S-5285	H75xW1099xL5285	180	18000						
	LR10075-S-5730	H75xW888xL5730	180	18000						
	LR10075-S-7145	H75xW1088xL7145	240	24000						
	LR10075-S-8560	H75xW1288xL8560	270	27000						
LR10075-S-9975	H75xW1488xL9975	360	36000							



**GOLDEN RATIO DESIGN**

L/W=0.618


Ordering code for Oval series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC4060-O-900	H60xW556xL900	15	1500	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4060-O-1050	H60xW650xL1050	20	2000						
	LC4060-O-1200	H60xW740xL1200	24	2400						
	LC4060-O-1340	H60xW840xL1340	28	2800						
	LC4060-O-1500	H60xW930xL1500	30	3000						
	LC4060-O-1650	H60xW1020xL1650	32	3200						
	LC4060-O-1800	H60xW1110xL1800	35	3500						
	LC4060-O-1940	H60xW1200xL1940	40	4000						
	LC6060-O-900	H60xW556xL900	30	3000						
	LC6060-O-1200	H60xW740xL1200	40	4000						
	LC6060-O-1500	H60xW930xL1500	50	5000						
	LC6060-O-1730	H60xW1070xL1730	70	7000						
LC6060-O-1940	H60xW1200xL1940	80	8000							
LCXX80	LC4080-O-900	H80xW556xL900	15	1500	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4080-O-1050	H80xW650xL1050	20	2000						
	LC4080-O-1200	H80xW740xL1200	24	2400						
	LC4080-O-1340	H80xW840xL1340	28	2800						
	LC4080-O-1500	H80xW930xL1500	30	3000						
	LC4080-O-1650	H80xW1020xL1650	32	3200						
	LC4080-O-1800	H80xW1110xL1800	35	3500						
	LC4080-O-1940	H80xW1200xL1940	40	4000						
	LC6080-O-900	H80xW556xL900	30	3000						
	LC6080-O-1200	H80xW740xL1200	40	4000						
	LC6080-O-1500	H80xW930xL1500	50	5000						
	LC6080-O-1730	H80xW1070xL1730	70	7000						
LC6080-O-1940	H80xW1200xL1940	80	8000							
LCXX100	LC60100-O-900	H100xW556xL900	30	3000	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC60100-O-1200	H100xW740xL1200	40	4000						
	LC60100-O-1500	H100xW930xL1500	50	5000						
	LC60100-O-1730	H100xW1070xL1730	70	7000						
	LC60100-O-1940	H100xW1200xL1940	80	8000						


Accessories



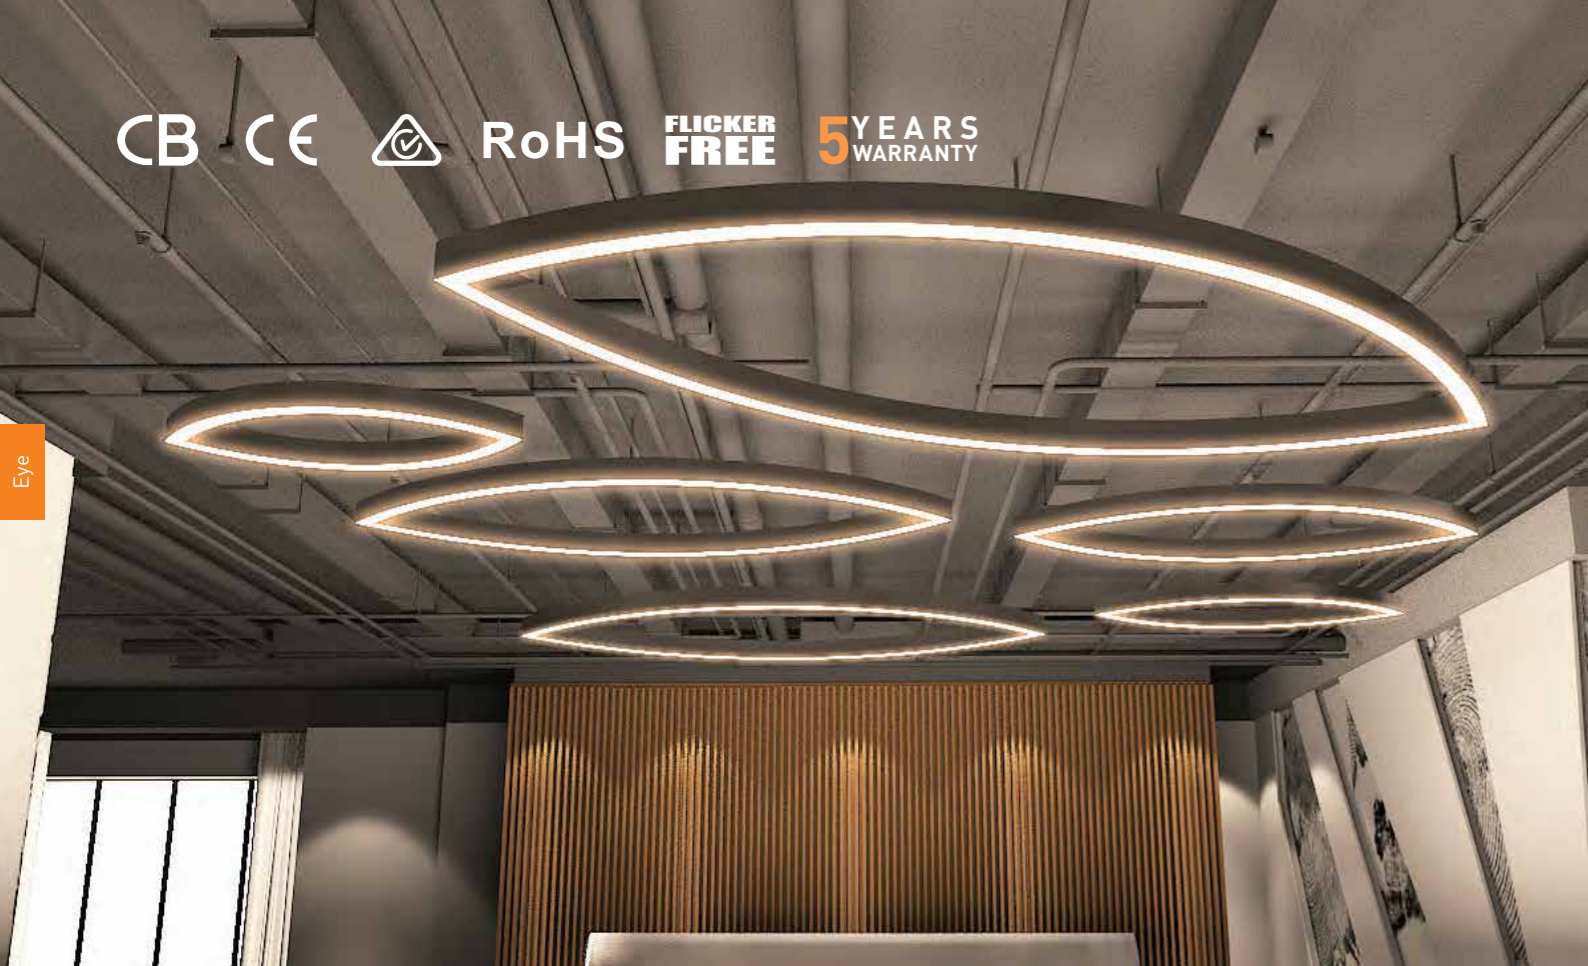

Eye

Eye

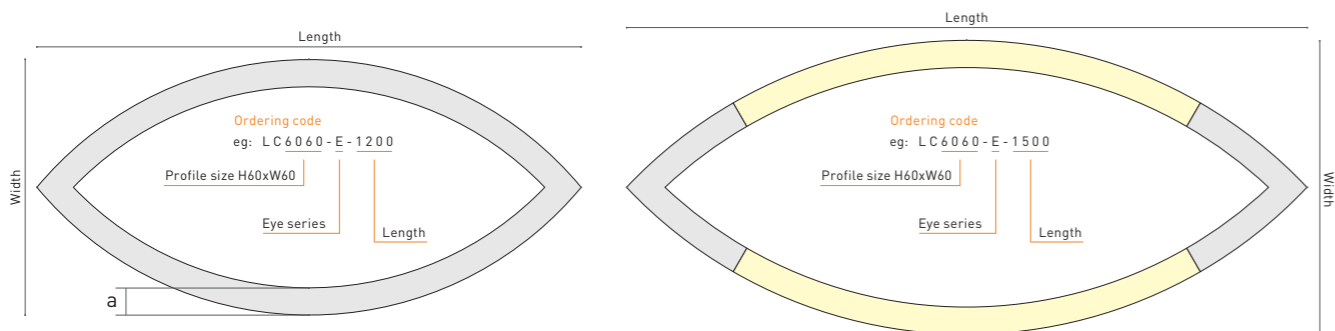

Case 1: if the length < 1.5m, profile & cover is only 1 part ;

Case 2: if the length ≥ 1.5m, profile is connected by parts.

Accessories




a/mm
40
50
60
70
80
90
100
110
120
150

Ordering code for Eye series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC6060-E-600	H60xW229xL600	20	2000	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC6060-E-900	H60xW406xL900	30	3000						
	LC6060-E-1200	H60xW563xL1200	40	4000						
	LC6060-E-1500	H60xW648xL1500	50	5000						
	LC6060-E-1800	H60xW783xL1800	60	6000						
	LC6060-E-2000	H60xW744xL2000	70	7000						
	LC6060-E-2400	H60xW897xL2400	80	8000						
	LC6060-E-3000	H60xW1126xL3000	100	10000						
	LC6060-E-3600	H60xW1504xL3600	120	12000						
	LC6060-E-4000	H60xW1508xL4000	160	16000						
LCXX80	LC6080-E-600	H80xW229xL600	20	2000	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC6080-E-900	H80xW406xL900	30	3000						
	LC6080-E-1200	H80xW563xL1200	40	4000						
	LC6080-E-1500	H80xW648xL1500	50	5000						
	LC6080-E-1800	H80xW783xL1800	60	6000						
	LC6080-E-2000	H80xW744xL2000	70	7000						
	LC6080-E-2400	H80xW897xL2400	80	8000						
	LC6080-E-3000	H80xW1126xL3000	100	10000						
	LC6080-E-3600	H80xW1504xL3600	120	12000						
	LC6080-E-4000	H80xW1508xL4000	160	16000						
LCXX100	LC60100-E-600	H100xW229xL600	20	2000	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC60100-E-900	H100xW406xL900	30	3000						
	LC60100-E-1200	H100xW563xL1200	40	4000						
	LC60100-E-1500	H100xW648xL1500	50	5000						
	LC60100-E-1800	H100xW783xL1800	60	6000						
	LC60100-E-2000	H100xW744xL2000	70	7000						
	LC60100-E-2400	H100xW897xL2400	80	8000						
	LC60100-E-3000	H100xW1126xL3000	100	10000						
	LC60100-E-3600	H100xW1504xL3600	120	12000						
	LC60100-E-4000	H100xW1508xL4000	160	16000						
LRXX35 LRXX75	LR8035/75-E-620	H35/75xW249xL620	20	2000	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LR8035/75-E-920	H35/75xW426xL920	30	3000						
	LR8035/75-E-1220	H35/75xW583xL1220	40	4000						
	LR8035/75-E-1520	H35/75xW668xL1520	50	5000						
	LR8035/75-E-1820	H35/75xW803xL1820	60	6000						
	LR8035/75-E-2020	H35/75xW764xL2020	70	7000						
	LR8035/75-E-2420	H35/75xW917xL2420	80	8000						
	LR8035/75-E-3020	H35/75xW1146xL3020	100	10000						

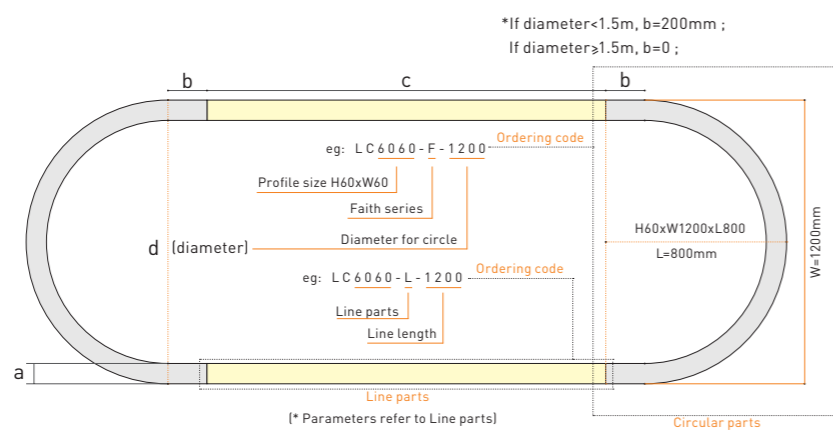

Accessories



a/mm	d/mm	c/mm	b/mm
	450	900	
40	660	1000	
50	900	1100	
60	1060	1200	
70	1200	1300	
80	1560	1400	0
90	1860	1500	200
100	2060	1600	
110	2460	1700	
120	3060	1800	
150	4060	1900	
	5060	2000	
	6060	2200	
	7060	2400	

Ordering code for Faith series-Circular parts

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W angle180	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
	LC4060-F-450	H60xW450xL425	9	900						
	LC4060-F-600	H60xW600xL500	11	1100						
	LC4060-F-740	H60xW740xL570	14	1400						
	LC4060-F-900	H60xW900xL650	16	1600						
	LC4060-F-1000	H60xW1000xL700	19	1900						
	LC4060-F-1200	H60xW1200xL800	21	2100						
	LC4060-F-1540	H60xW1540xL770	20	2000						
	LC4060-F-1840	H60xW1840xL920	27	2700						
	LC4060-F-2040	H60xW2040xL1020	30	3000						
	LC4060-F-2440	H60xW2440xL1220	37	3700						
	LC4060-F-3040	H60xW3040xL1520	45	4500						
	LC4060-F-4040	H60xW4040xL2020	60	6000						
	LC4060-F-5040	H60xW5040xL2520	80	8000						
	LC4060-F-6040	H60xW6040xL3020	90	9000						
	LC4060-F-7040	H60xW7040xL3520	120	12000						
	LC6060-F-450	H60xW450xL425	20	2000						
	LC6060-F-660	H60xW660xL530	25	2500						
	LC6060-F-900	H60xW900xL650	30	3000						
	LC6060-F-1060	H60xW1060xL730	35	3500						
	LC6060-F-1200	H60xW1200xL800	40	4000						
LCXX60	LC6060-F-1560	H60xW1560xL780	40	4000	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC6060-F-1860	H60xW1860xL930	55	5500						
	LC6060-F-2060	H60xW2060xL1030	60	6000						
	LC6060-F-2460	H60xW2460xL1230	75	7500						
	LC6060-F-3060	H60xW3060xL1530	90	9000						
	LC6060-F-4060	H60xW4060xL2030	120	12000						
	LC6060-F-5060	H60xW5060xL2530	160	16000						
	LC6060-F-6060	H60xW6060xL3030	180	18000						
	LC6060-F-7060	H60xW7060xL3530	240	24000						
	LC8060-F-680	H60xW680xL540	30	3000						
	LC8060-F-900	H60xW900xL650	40	4000						
	LC8060-F-1200	H60xW1200xL800	55	5500						
	LC8060-F-1580	H60xW1580xL790	60	6000						
	LC8060-F-1880	H60xW1880xL940	80	8000						
	LC8060-F-2080	H60xW2080xL1040	90	9000						
	LC8060-F-2480	H60xW2480xL1240	110	11000						
	LC8060-F-3080	H60xW3080xL1540	135	13500						
	LC8060-F-4080	H60xW4080xL2040	180	18000						
	LC8060-F-5080	H60xW5080xL2540	240	24000						
	LC8060-F-6080	H60xW6080xL3040	270	27000						
	LC8060-F-7080	H60xW7080xL3540	360	36000						

Ordering code for Faith series-Circular parts

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W angle180	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LC4080-F-450	H80xW450xL425	9	900	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4080-F-600	H80xW600xL500	11	1100						
	LC4080-F-740	H80xW740xL570	14	1400						
	LC4080-F-900	H80xW900xL650	16	1600						
	LC4080-F-1000	H80xW1000xL700	19	1900						
	LC4080-F-1200	H80xW1200xL800	21	2100						
	LC4080-F-1540	H80xW1540xL770	20	2000						
	LC4080-F-1840	H80xW1840xL920	27	2700						
	LC4080-F-2040	H80xW2040xL1020	30	3000						
	LC4080-F-2440	H80xW2440xL1220	37	3700						
	LC4080-F-3040	H80xW3040xL1520	45	4500						
	LC4080-F-4040	H80xW4040xL2020	60	6000						
	LC4080-F-5040	H80xW5040xL2520	80	8000						
	LC4080-F-6040	H80xW6040xL3020	90	9000						
	LC4080-F-7040	H80xW7040xL3520	120	12000						
	LC6080-F-450	H80xW450xL425	20	2000						
	LC6080-F-660	H80xW660xL530	25	2500						
	LC6080-F-900	H80xW900xL650	30	3000						
	LC6080-F-1060	H80xW1060xL730	35	3500						
	LC6080-F-1200	H80xW1200xL800	40	4000						
	LC6080-F-1560	H80xW1560xL780	40	4000						
	LC6080-F-1860	H80xW1860xL930	55	5500						
	LC6080-F-2060	H80xW2060xL1030	60	6000						
	LC6080-F-2460	H80xW2460xL1230	75	7500						
	LC6080-F-3060	H80xW3060xL1530	90	9000						
	LC6080-F-4060	H80xW4060xL2030	120	12000						
	LC6080-F-5060	H80xW5060xL2530	160	16000						
	LC6080-F-6060	H80xW6060xL3030	180	18000						
	LC6080-F-7060	H80xW7060xL3530	240	24000						
	LC8080-F-680	H80xW680xL540	30	3000						
	LC8080-F-900	H80xW900xL650	40	4000						
	LC8080-F-1200	H80xW1200xL800	55	5500						
	LC8080-F-1580	H80xW1580xL790	60	6000						
	LC8080-F-1880	H80xW1880xL940	80	8000						
	LC8080-F-2080	H80xW2080xL1040	90	9000						
	LC8080-F-2480	H80xW2480xL1240	110	11000						
	LC8080-F-3080	H80xW3080xL1540	135	13500						
	LC8080-F-4080	H80xW4080xL2040	180	18000						
	LC8080-F-5080	H80xW5080xL2540	240	24000						
	LC8080-F-6080	H80xW6080xL3040	270	27000						
LC8080-F-7080	H80xW7080xL3540	360	36000							


Ordering code for Faith series-Circular parts

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W angle180	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX100	LC50100-F-450	H100xW450xL425	9	900	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC50100-F-600	H100xW600xL500	11	1100						
	LC50100-F-740	H100xW740xL570	14	1400						
	LC50100-F-900	H100xW900xL650	16	1600						
	LC50100-F-1000	H100xW1000xL700	19	1900						
	LC50100-F-1200	H100xW1200xL800	21	2100						
	LC50100-F-1540	H100xW1540xL770	20	2000						
	LC50100-F-1840	H100xW1840xL920	27	2700						
	LC50100-F-2040	H100xW2040xL1020	30	3000						
	LC50100-F-2440	H100xW2440xL1220	37	3700						
	LC50100-F-3040	H100xW3040xL1520	45	4500						
	LC50100-F-4040	H100xW4040xL2020	60	6000						
	LC50100-F-5040	H100xW5040xL2520	80	8000						
	LC50100-F-6040	H100xW6040xL3020	90	9000						
	LC50100-F-7040	H100xW7040xL3520	120	12000						
	LC60100-F-450	H100xW450xL425	20	2000						
	LC60100-F-660	H100xW660xL530	25	2500						
	LC60100-F-900	H100xW900xL650	30	3000						
	LC60100-F-1060	H100xW1060xL730	35	3500						
	LC60100-F-1200	H100xW1200xL800	40	4000						
	LC60100-F-1560	H100xW1560xL780	40	4000						
	LC60100-F-1860	H100xW1860xL930	55	5500						
	LC60100-F-2060	H100xW2060xL1030	60	6000						
	LC60100-F-2460	H100xW2460xL1230	75	7500						
	LC60100-F-3060	H100xW3060xL1530	90	9000						
	LC60100-F-4060	H100xW4060xL2030	120	12000						
	LC60100-F-5060	H100xW5060xL2530	160	16000						
	LC60100-F-6060	H100xW6060xL3030	180	18000						
	LC60100-F-7060	H100xW7060xL3530	240	24000						
	LC80100-F-680	H100xW680xL540	30	3000						
	LC80100-F-900	H100xW900xL650	40	4000						
	LC80100-F-1200	H100xW1200xL800	55	5500						
	LC80100-F-1580	H100xW1580xL790	60	6000						
	LC80100-F-1880	H100xW1880xL940	80	8000						
	LC80100-F-2080	H100xW2080xL1040	90	9000						
	LC80100-F-2480	H100xW2480xL1240	110	11000						
	LC80100-F-3080	H100xW3080xL1540	135	13500						
	LC80100-F-4080	H100xW4080xL2040	180	18000						
	LC80100-F-5080	H100xW5080xL2540	240	24000						
	LC80100-F-6080	H100xW6080xL3040	270	27000						
LC80100-F-7080	H100xW7080xL3540	360	36000							



Sections

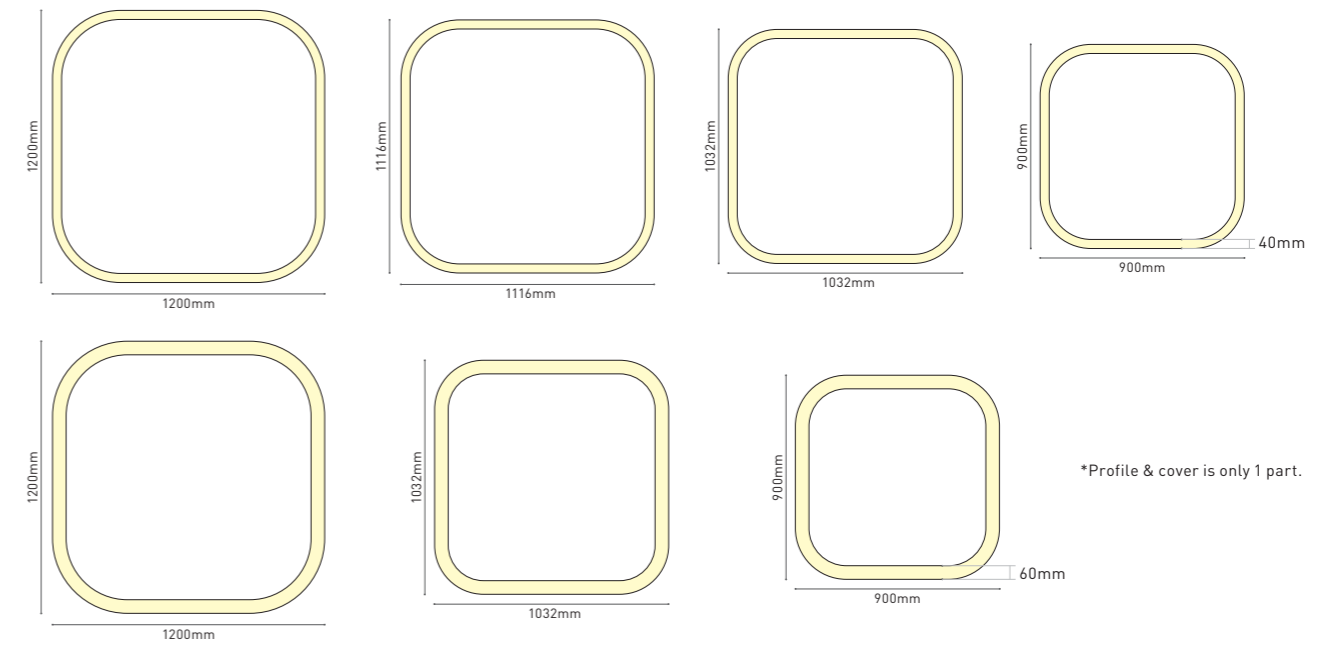

Ordering code for Belief series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC4060-B-900	H60xW900xL900	20	2000	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4060-B-1032	H60xW1032xL1032	25	2500						
	LC4060-B-1116	H60xW1116xL1116	35	3500						
	LC4060-B-1200	H60xW1200xL1200	40	4000						
	LC6060-B-900	H60xW900xL900	50	5000						
	LC6060-B-1032	H60xW1032xL1032	60	6000						
LCXX80	LC4080-B-900	H80xW900xL900	20	2000	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4080-B-1032	H80xW1032xL1032	25	2500						
	LC4080-B-1116	H80xW1116xL1116	35	3500						
	LC4080-B-1200	H80xW1200xL1200	40	4000						
	LC6080-B-900	H80xW900xL900	50	5000						
	LC6080-B-1032	H80xW1032xL1032	60	6000						
LCXX100	LC60100-B-900	H100xW900xL900	50	5000	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC60100-B-1032	H100xW1032xL1032	60	6000						
	LC60100-B-1200	H100xW1200xL1200	70	7000						


Accessories





Belief

Belief

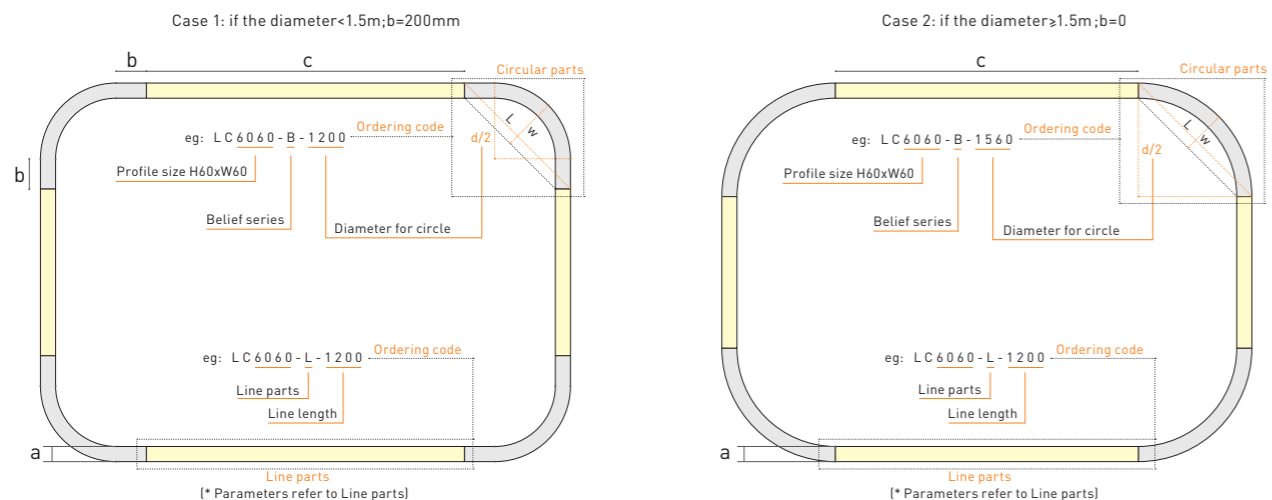

**Accessories**



a/mm	d/mm	c/mm	b/mm
	450	900	
40	660	1000	
50	900	1100	
60	1060	1200	
70	1200	1300	
80	1560	1400	0
90	1860	1500	200
100	2060	1600	
110	2460	1700	
120	3060	1800	
150	4060	1900	
	5060	2000	
	6060	2200	
		2400	

**Ordering code for Belief series-Circular parts**

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W angle 90°	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
	LC4060-B-450	H60xW236xL601	6	600						
	LC4060-B-600	H60xW258xL707	8	800						
	LC4060-B-740	H60xW278xL806	9	900						
	LC4060-B-900	H60xW302xL919	10	1000						
	LC4060-B-1000	H60xW316xL990	12	1200						
	LC4060-B-1200	H60xW345xL1131	13	1300						
	LC4060-B-1540	H60xW254xL1089	10	1000						
	LC4060-B-1840	H60xW298xL1301	14	1400						
	LC4060-B-2040	H60xW327xL1443	15	1500						
	LC4060-B-2440	H60xW386xL1725	19	1900						
	LC4060-B-3040	H60xW473xL2150	22	2200						
	LC4060-B-4040	H60xW620xL2857	30	3000						
	LC4060-B-5040	H60xW766xL3564	40	4000						
	LC4060-B-6040	H60xW913xL4271	45	4500						
	LC4060-B-7040	H60xW1059xL4978	60	6000						
	LC6060-B-450	H60xW250xL601	15	1500						
	LC6060-B-660	H60xW281xL750	18	1800						
	LC6060-B-900	H60xW316xL919	20	2000	Non	2700K				
	LC6060-B-1060	H60xW339xL1032	22	2200	Dati	3000K				
	LC6060-B-1200	H60xW360xL1131	25	2500	Push	4000K				
	LC6060-B-1560	H60xW271xL1103	20	2000	Triac	6000K	>80	200-240	White	CE
	LC6060-B-1860	H60xW315xL1315	27	2700	0-10V	6500K	>90	100-277	Black	CB
	LC6060-B-2060	H60xW344xL1457	30	3000	Remote	RGB	>95		Silver	SAA
	LC6060-B-2460	H60xW403xL1739	37	3700	Tunable	RGBW			Gold	RCM
	LC6060-B-3060	H60xW491xL2164	45	4500	Emergency					RoHS
	LC6060-B-4060	H60xW637xL2871	60	6000						
	LC6060-B-5060	H60xW783xL3578	80	8000						
	LC6060-B-6060	H60xW930xL4285	90	9000						
	LC6060-B-7060	H60xW1076xL4992	120	12000						
	LC8060-B-680	H60xW298xL764	22	2200						
	LC8060-B-900	H60xW330xL919	27	2700						
	LC8060-B-1200	H60xW374xL1131	35	3500						
	LC8060-B-1580	H60xW288xL1117	30	3000						
	LC8060-B-1880	H60xW332xL1329	40	4000						
	LC8060-B-2080	H60xW361xL1471	45	4500						
	LC8060-B-2480	H60xW420xL1754	56	5600						
	LC8060-B-3080	H60xW508xL2178	67	6700						
	LC8060-B-4080	H60xW654xL2885	90	9000						
	LC8060-B-5080	H60xW801xL3592	120	12000						
	LC8060-B-6080	H60xW947xL4299	135	13500						
	LC8060-B-7080	H60xW1093xL5006	180	18000						

Ordering code for Belief series-Circular parts

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W angle 90°	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LC4080-B-450	H80xW236xL601	6	600	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4080-B-600	H80xW258xL707	8	800						
	LC4080-B-740	H80xW278xL806	9	900						
	LC4080-B-900	H80xW302xL919	10	1000						
	LC4080-B-1000	H80xW316xL990	12	1200						
	LC4080-B-1200	H80xW345xL1131	13	1300						
	LC4080-B-1540	H80xW254xL1089	10	1000						
	LC4080-B-1840	H80xW298xL1301	14	1400						
	LC4080-B-2040	H80xW327xL1443	15	1500						
	LC4080-B-2440	H80xW386xL1725	19	1900						
	LC4080-B-3040	H80xW473xL2150	22	2200						
	LC4080-B-4040	H80xW620xL2857	30	3000						
	LC4080-B-5040	H80xW766xL3564	40	4000						
	LC4080-B-6040	H80xW913xL4271	45	4500						
	LC4080-B-7040	H80xW1059xL4978	60	6000						
	LC6080-B-450	H80xW250xL601	15	1500						
	LC6080-B-660	H80xW281xL750	18	1800						
	LC6080-B-900	H80xW316xL919	20	2000						
	LC6080-B-1060	H80xW339xL1032	22	2200						
	LC6080-B-1200	H80xW360xL1131	25	2500						
	LC6080-B-1560	H80xW271xL1103	20	2000						
	LC6080-B-1860	H80xW315xL1315	27	2700						
	LC6080-B-2060	H80xW344xL1457	30	3000						
	LC6080-B-2460	H80xW403xL1739	37	3700						
	LC6080-B-3060	H80xW491xL2164	45	4500						
	LC6080-B-4060	H80xW637xL2871	60	6000						
	LC6080-B-5060	H80xW783xL3578	80	8000						
	LC6080-B-6060	H80xW930xL4285	90	9000						
	LC6080-B-7060	H80xW1076xL4992	120	12000						
	LC8080-B-680	H80xW298xL764	22	2200						
	LC8080-B-900	H80xW330xL919	27	2700						
	LC8080-B-1200	H80xW374xL1131	35	3500						
	LC8080-B-1580	H80xW288xL1117	30	3000						
	LC8080-B-1880	H80xW332xL1329	40	4000						
	LC8080-B-2080	H80xW361xL1471	45	4500						
	LC8080-B-2480	H80xW420xL1754	56	5600						
	LC8080-B-3080	H80xW508xL2178	67	6700						
	LC8080-B-4080	H80xW654xL2885	90	9000						
	LC8080-B-5080	H80xW801xL3592	120	12000						
	LC8080-B-6080	H80xW947xL4299	135	13500						
LC8080-B-7080	H80xW1093xL5006	180	18000							

Ordering code for Belief series-Circular parts

\*Lumens @4000K, CRI 80


Model	Item	Size/mm	Power/W angle 90°	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX100	LC40100-B-450	H100xW236xL601	6	600	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC40100-B-600	H100xW258xL707	8	800						
	LC40100-B-740	H100xW278xL806	9	900						
	LC40100-B-900	H100xW302xL919	10	1000						
	LC40100-B-1000	H100xW316xL990	12	1200						
	LC40100-B-1200	H100xW345xL1131	13	1300						
	LC40100-B-1540	H100xW254xL1089	10	1000						
	LC40100-B-1840	H100xW298xL1301	14	1400						
	LC40100-B-2040	H100xW327xL1443	15	1500						
	LC40100-B-2440	H100xW386xL1725	19	1900						
	LC40100-B-3040	H100xW473xL2150	22	2200						
	LC40100-B-4040	H100xW620xL2857	30	3000						
	LC40100-B-5040	H100xW766xL3564	40	4000						
	LC40100-B-6040	H100xW913xL4271	45	4500						
	LC40100-B-7040	H100xW1059xL4978	60	6000						
	LC60100-B-450	H100xW250xL601	15	1500						
	LC60100-B-660	H100xW281xL750	18	1800						
	LC60100-B-900	H100xW316xL919	20	2000						
	LC60100-B-1060	H100xW339xL1032	22	2200						
	LC60100-B-1200	H100xW360xL1131	25	2500						
	LC60100-B-1560	H100xW271xL1103	20	2000						
	LC60100-B-1860	H100xW315xL1315	27	2700						
	LC60100-B-2060	H100xW344xL1457	30	3000						
	LC60100-B-2460	H100xW403xL1739	37	3700						
	LC60100-B-3060	H100xW491xL2164	45	4500						
	LC60100-B-4060	H100xW637xL2871	60	6000						
	LC60100-B-5060	H100xW783xL3578	80	8000						
	LC60100-B-6060	H100xW930xL4285	90	9000						
	LC60100-B-7060	H100xW1076xL4992	120	12000						
	LC80100-B-680	H100xW298xL764	22	2200						
	LC80100-B-900	H100xW330xL919	27	2700						
	LC80100-B-1200	H100xW374xL1131	35	3500						
	LC80100-B-1580	H100xW288xL1117	30	3000						
	LC80100-B-1880	H100xW332xL1329	40	4000						
	LC80100-B-2080	H100xW361xL1471	45	4500						
	LC80100-B-2480	H100xW420xL1754	56	5600						
	LC80100-B-3080	H100xW508xL2178	67	6700						
	LC80100-B-4080	H100xW654xL2885	90	9000						
	LC80100-B-5080	H100xW801xL3592	120	12000						
	LC80100-B-6080	H100xW947xL4299	135	13500						
LC80100-B-7080	H100xW1093xL5006	180	18000							




Galaxy

Galaxy

Case 1: if the length < 1.5m, profile & cover is only 1 part ;

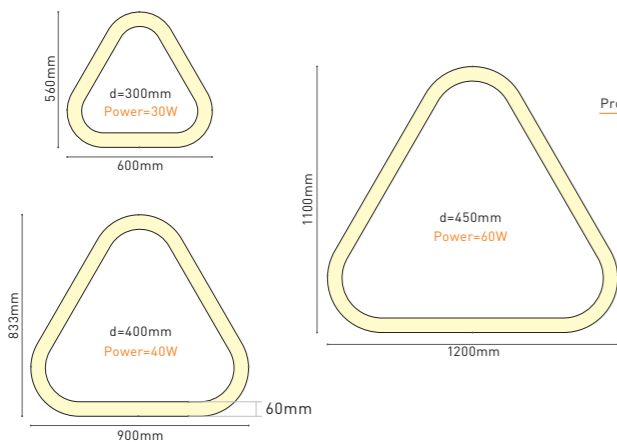

Case 2: if the length > 1.5m, profile is connected by parts.

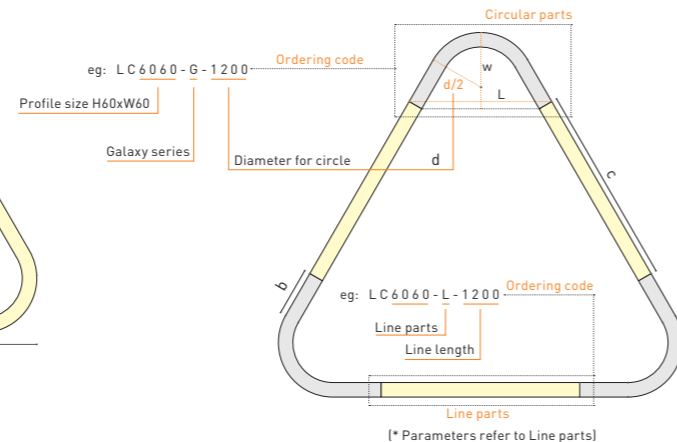

Accessories



a/mm	d/mm	c/mm	b/mm
		900	
40	300	1000	
50	400	1100	
60	450	1200	
70	600	1400	
80	660	1500	
90	680	1600	
100	740	1700	
110	900	1800	200
120	1000	1900	
150	1060	2000	
	1200	2200	
		2400	


Ordering code for Galaxy series-Circular parts

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W angle 60°	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC4060-G-450	H60xW306xL590	7	700	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4060-G-600	H60xW343xL720	9	900						
	LC4060-G-740	H60xW378xL841	10	1000						
	LC4060-G-900	H60xW418xL979	12	1200						
	LC4060-G-1000	H60xW443xL1066	14	1400						
	LC4060-G-1200	H60xW493xL1239	15	1500						
	LC6060-G-450	H60xW316xL590	17	1700						
	LC6060-G-660	H60xW368xL772	20	2000						
	LC6060-G-900	H60xW428xL979	23	2300						
	LC6060-G-1060	H60xW468xL1118	27	2700						
	LC6060-G-1200	H60xW503xL1239	30	3000						
	LCXX80	LC4080-G-450	H80xW306xL590	7						
LC4080-G-600		H80xW343xL720	9	900						
LC4080-G-740		H80xW378xL841	10	1000						
LC4080-G-900		H80xW418xL979	12	1200						
LC4080-G-1000		H80xW443xL1066	14	1400						
LC4080-G-1200		H80xW493xL1239	15	1500						
LC6080-G-450		H80xW316xL590	17	1700						
LC6080-G-660		H80xW368xL772	20	2000						
LC6080-G-900		H80xW428xL979	23	2300						
LC6080-G-1060		H80xW468xL1118	27	2700						
LC6080-G-1200		H80xW503xL1239	30	3000						
LCXX100		LC50100-G-450	H100xW306xL590	7	700	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold
	LC50100-G-600	H100xW343xL720	9	900						
	LC50100-G-740	H100xW378xL841	10	1000						
	LC50100-G-900	H100xW418xL979	12	1200						
	LC50100-G-1000	H100xW443xL1066	14	1400						
	LC50100-G-1200	H100xW493xL1239	15	1500						
	LC60100-G-450	H100xW316xL590	17	1700						
	LC60100-G-660	H100xW368xL772	20	2000						
	LC60100-G-900	H100xW428xL979	23	2300						
	LC60100-G-1060	H100xW468xL1118	27	2700						
	LC60100-G-1200	H100xW503xL1239	30	3000						
	LC80100-G-900	H100xW438xL979	32	3200						
LC80100-G-1200	H100xW513xL1239	40	4000							



Quadrate

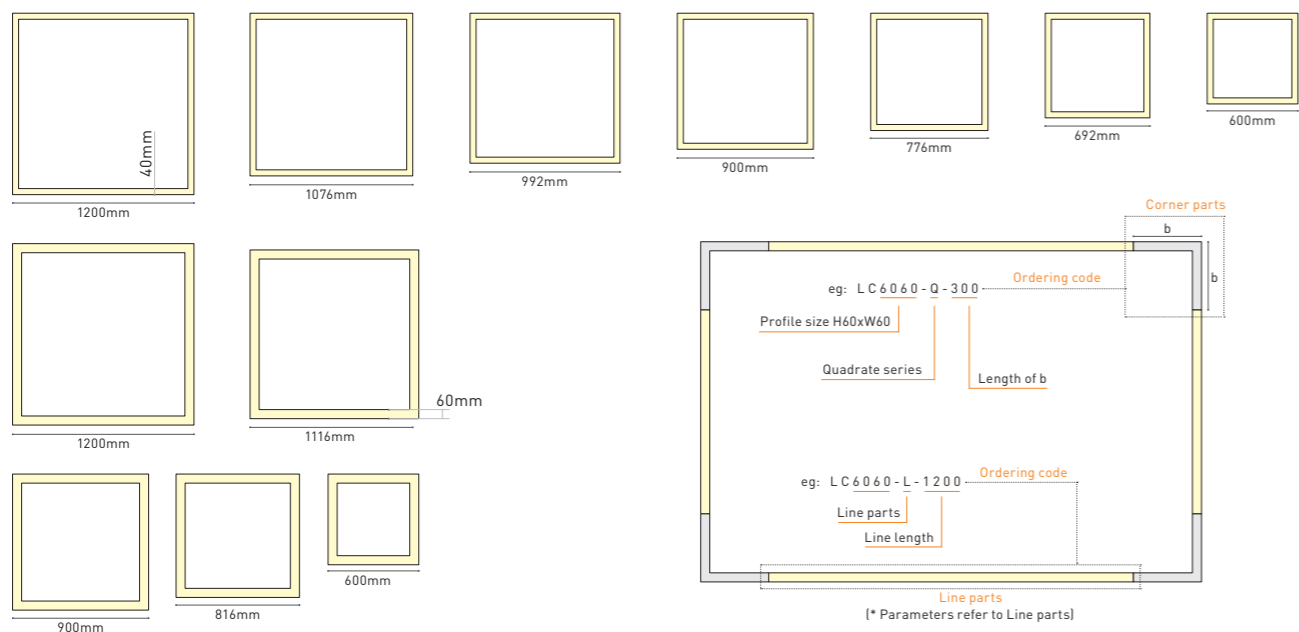

Accessories



a/mm	b/mm	c/mm
		900
40		1000
50		1100
60		1200
70		1300
80	300	1400
90	400	1500
100		1600
110		1700
120		1800
150		2000
		2200
		2400

Ordering code for Quadrate series - <1.5M

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC4060-Q-600	H60xW600xL600	15	1500	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4060-Q-692	H60xW692xL692	20	2000						
	LC4060-Q-776	H60xW776xL776	24	2400						
	LC4060-Q-900	H60xW900xL900	27	2700						
	LC4060-Q-992	H60xW992xL992	30	3000						
	LC4060-Q-1076	H60xW1076xL1076	35	3500						
	LC4060-Q-1200	H60xW1200xL1200	40	4000						
	LC6060-Q-600	H60xW600xL600	40	4000						
	LC6060-Q-816	H60xW816xL816	55	5500						
	LC6060-Q-900	H60xW900xL900	60	6000						
LCXX80	LC4080-Q-600	H80xW600xL600	15	1500	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4080-Q-692	H80xW692xL692	20	2000						
	LC4080-Q-776	H80xW776xL776	24	2400						
	LC4080-Q-900	H80xW900xL900	27	2700						
	LC4080-Q-992	H80xW992xL992	30	3000						
	LC4080-Q-1076	H80xW1076xL1076	35	3500						
	LC4080-Q-1200	H80xW1200xL1200	40	4000						
	LC6080-Q-600	H80xW600xL600	40	4000						
	LC6080-Q-816	H80xW816xL816	55	5500						
	LC6080-Q-900	H80xW900xL900	60	6000						
LCXX100	LC60100-Q-300	H100xW300xL300	10	1000	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC80100-Q-300	H100xW300xL300	15	1500						

Quadrate

Ordering code for Quadrate series - ≥1.5M; angle 90°

LCXX60	LC4060-Q-300	H60xW300xL300	4	400	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC5060-Q-300	H60xW300xL300	4	400						
	LC6060-Q-300	H60xW300xL300	10	1000						
	LC7060-Q-300	H60xW300xL300	10	1000						
LCXX80	LC8060-Q-300	H60xW300xL300	15	1500	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4080-Q-300	H80xW300xL300	4	400						
	LC5080-Q-300	H80xW300xL300	4	400						
	LC6080-Q-300	H80xW300xL300	10	1000						
	LC7080-Q-300	H80xW300xL300	10	1000						
	LC8080-Q-300	H80xW300xL300	15	1500						
	LC9080-Q-300	H80xW300xL300	15	1500						
	LC10080-Q-300	H80xW300xL300	20	2000						
	LC12080-Q-300	H80xW300xL300	20	2000						
	LCXX100	LC60100-Q-300	H100xW300xL300	10						
LC80100-Q-300		H100xW300xL300	15	1500						




Ordering code for Triangle series - <1.5M

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC4060-T-600	H60xW520xL600	13	1300	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4060-T-755	H60xW653xL755	15	1500						
	LC4060-T-900	H60xW779xL900	20	2000						
	LC4060-T-1055	H60xW913xL1055	25	2500						
	LC4060-T-1200	H60xW1039xL1200	30	3000						
	LC6060-T-600	H60xW520xL600	30	3000						
LC6060-T-900	H60xW779xL900	50	5000							
LC6060-T-1200	H60xW1039xL1200	60	6000							
LCXX80	LC4080-T-600	H80xW520xL600	13	1300						
	LC4080-T-755	H80xW653xL755	15	1500						
	LC4080-T-900	H80xW779xL900	20	2000						
	LC4080-T-1055	H80xW913xL1055	25	2500						
	LC4080-T-1200	H80xW1039xL1200	30	3000						
	LC6080-T-600	H80xW520xL600	30	3000						
LC6080-T-900	H80xW779xL900	50	5000							
LC6080-T-1200	H80xW1039xL1200	60	6000							
LCXX100	LC60100-T-600	H100xW520xL600	30	3000						
	LC60100-T-900	H100xW779xL900	50	5000						
	LC60100-T-1200	H100xW1039xL1200	60	6000						

Triangle

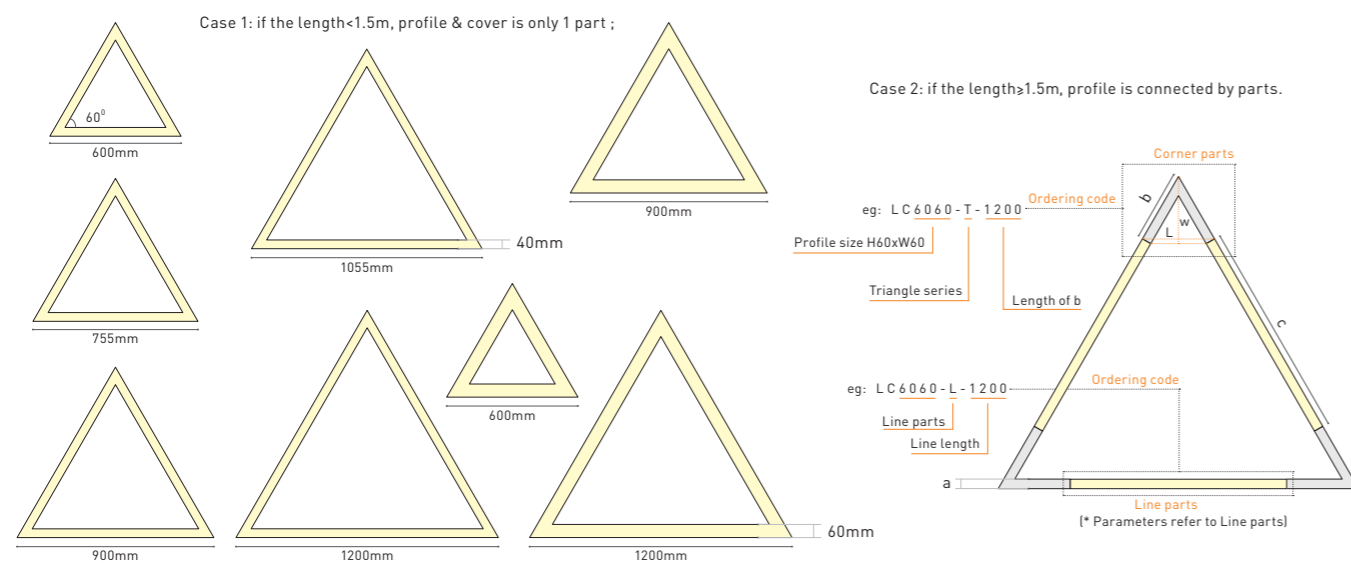

Triangle

Ordering code for Triangle series - ≥1.5M ; angle 60°

LCXX60	LC4060-T-300	H60xW280xL300	4	400	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC5060-T-300	H60xW285xL300	4	400						
	LC6060-T-300	H60xW290xL300	10	1000						
	LC7060-T-300	H60xW295xL300	10	1000						
LCXX80	LC8060-T-300	H60xW300xL300	15	1500						
	LC4080-T-300	H80xW280xL300	4	400						
	LC5080-T-300	H80xW285xL300	4	400						
	LC6080-T-300	H80xW290xL300	10	1000						
	LC7080-T-300	H80xW295xL300	10	1000						
	LC8080-T-300	H80xW300xL300	15	1500						
LCXX100	LC9080-T-300	H80xW305xL300	15	1500						
	LC10080-T-400	H80xW396xL400	28	2800						
	LC12080-T-400	H80xW406xL400	28	2800						
	LC60100-T-300	H100xW290xL300	7	700						
	LC70100-T-300	H100xW295xL300	9	900						
	LC80100-T-300	H100xW300xL300	15	1500						
	LC90100-T-300	H100xW305xL300	15	1500						
	LC100100-T-400	H100xW396xL400	28	2800						
LC110100-T-400	H100xW401xL400	28	2800							
LC120100-T-400	H100xW406xL400	28	2800							


Accessories



a/mm	b/mm	c/mm
		900
40		1000
		1100
50		1200
		1300
60		1400
		1500
70		1600
	300	1700
80		1800
	400	1900
90		2000
		2100
100		2200
		2300
110		2400
		2500
120		2600
		2700
130		2800
		2900
140		3000
		3100
150		3200
		3300
		3400
		3500
		3600
		3700
		3800
		3900
		4000



## Sections

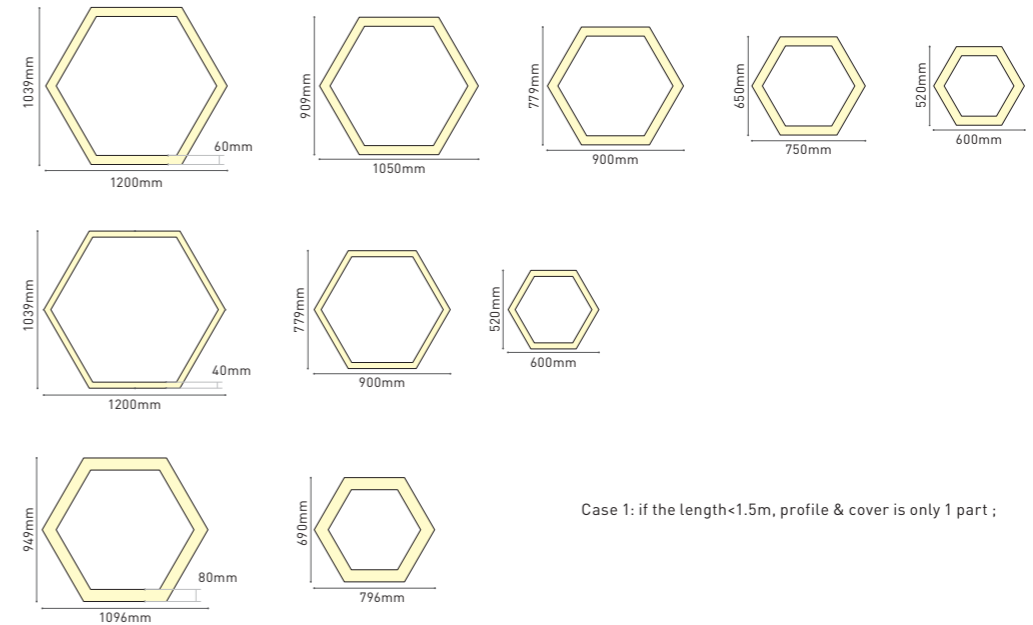

Case 1: if the length < 1.5m, profile & cover is only 1 part ;


### Ordering code for Hexagon series - < 1.5M

\*Lumens @4000K, CRI 80


Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC4060-H-600	H60xW520xL600	13	1300	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4060-H-900	H60xW779xL900	17	1700						
	LC4060-H-1200	H60xW1039xL1200	20	2000						
	LC6060-H-600	H60xW520xL600	25	2500						
	LC6060-H-750	H60xW650xL750	30	3000						
	LC6060-H-900	H60xW779xL900	30	3000						
	LC6060-H-1050	H60xW909xL1050	45	4500						
	LC6060-H-1200	H60xW1039xL1200	60	6000						
	LC8060-H-796	H60xW690xL796	60	6000						
LC8060-H-1096	H60xW949xL1096	80	8000							
LCXX80	LC4080-H-600	H80xW520xL600	13	1300	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4080-H-900	H80xW779xL900	17	1700						
	LC4080-H-1200	H80xW1039xL1200	20	2000						
	LC6080-H-600	H80xW520xL600	25	2500						
	LC6080-H-750	H80xW650xL750	30	3000						
	LC6080-H-900	H80xW779xL900	30	3000						
	LC6080-H-1050	H80xW909xL1050	45	4500						
	LC6080-H-1200	H80xW1039xL1200	60	6000						
	LC8080-H-796	H80xW690xL796	60	6000						
LC8080-H-1096	H80xW949xL1096	80	8000							
LCXX100	LC60100-H-600	H100xW520xL600	25	2500	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC60100-H-900	H100xW779xL900	30	3000						
	LC60100-H-1200	H100xW1039xL1200	60	6000						

## Sections

Case 2: if the length  $\geq 1.5m$ , profile is connected by parts.

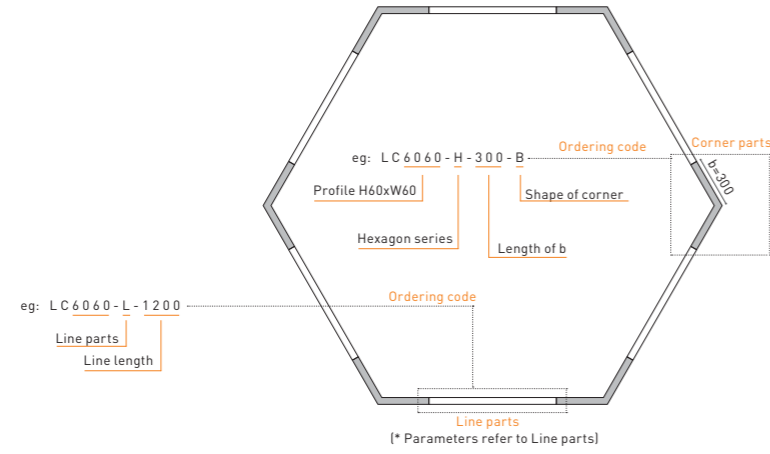

### Corners for more shapes

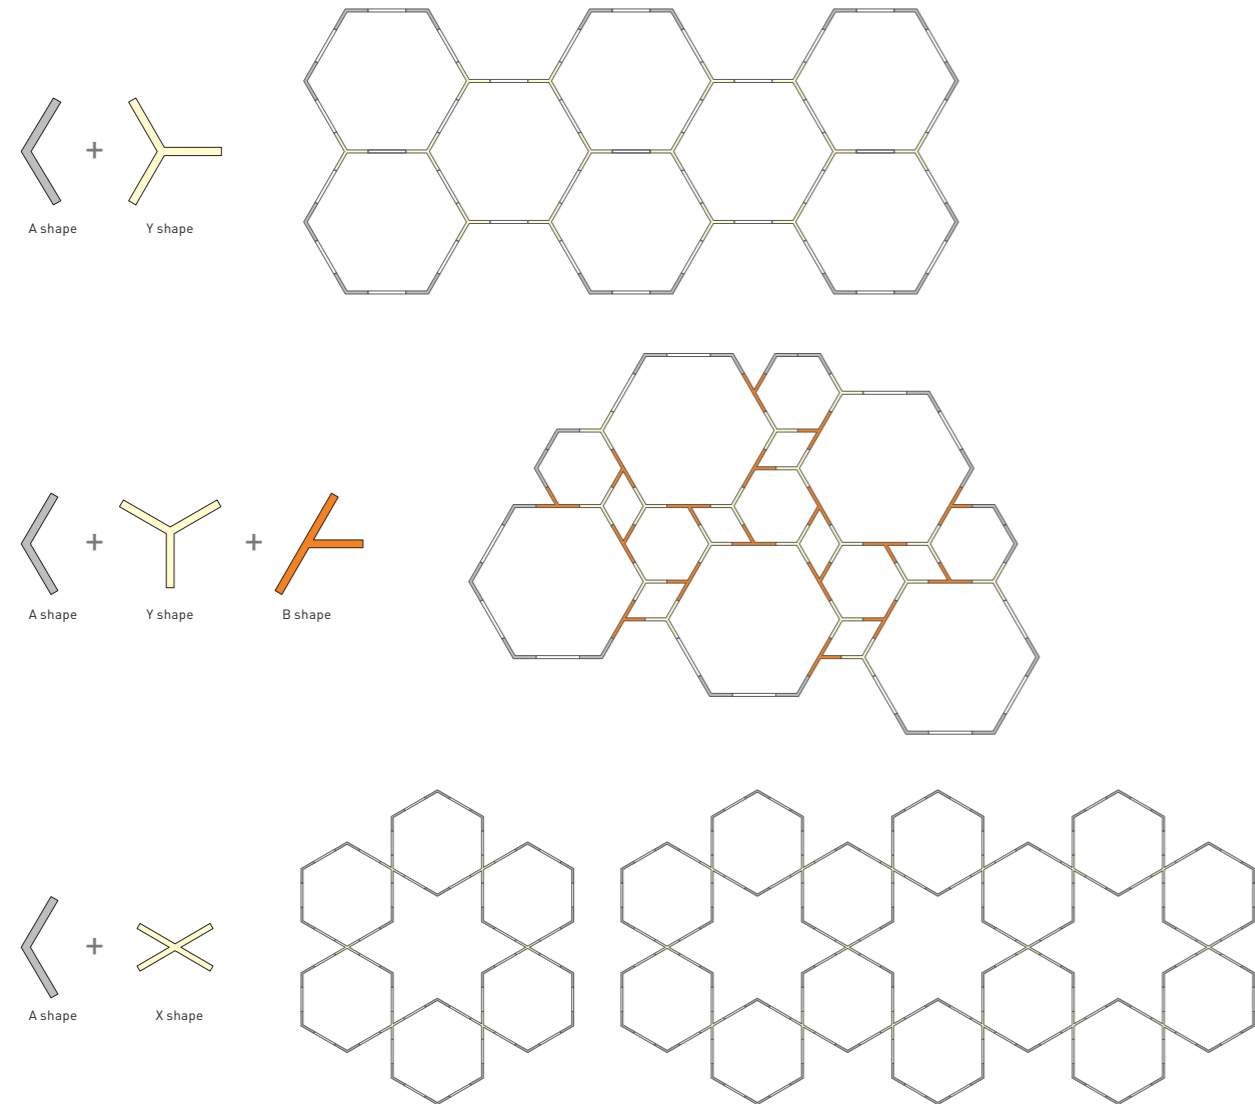

## Ordering code for Hexagon series - $\geq 1.5M$

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W corner	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC4060-H-300-A	H60xW185xL520	4	400	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4060-H-300-E	H60xW288xL480	6	600						
	LC4060-H-300-B	H60xW280xL577	6	600						
	LC4060-H-300-Y	H60xW450xL520	6	600						
	LC4060-H-300-K	H60xW260xL531	7	700						
	LC4060-H-300-C	H60xW480xL531	7	700						
	LC4060-H-300-X	H60xW323xL520	7	700						
	LC4060-H-300-F	H60xW415xL480	9	900						
	LC4060-H-300-S	H60xW480xL531	12	1200						
	LC6060-H-300-A	H60xW202xL520	10	1000						
	LC6060-H-300-E	H60xW288xL480	16	1600						
	LC6060-H-300-B	H60xW285xL578	16	1600						
	LC6060-H-300-Y	H60xW459xL530	16	1600						
	LC6060-H-300-K	H60xW265xL531	20	2000						
	LC6060-H-300-C	H60xW490xL531	20	2000						
LC6060-H-300-X	H60xW340xL530	20	2000							
LC6060-H-300-F	H60xW424xL490	25	2500							
LC6060-H-300-S	H60xW490xL531	30	3000							
LCXX80	LC4080-H-300-A	H80xW185xL520	4	400	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4080-H-300-E	H80xW288xL480	6	600						
	LC4080-H-300-B	H80xW280xL577	6	600						
	LC4080-H-300-Y	H80xW450xL520	6	600						
	LC4080-H-300-K	H80xW260xL531	7	700						
	LC4080-H-300-C	H80xW480xL531	7	700						
	LC4080-H-300-X	H80xW323xL520	7	700						
	LC4080-H-300-F	H80xW415xL480	9	900						
	LC4080-H-300-S	H80xW480xL531	12	1200						
	LC6080-H-300-A	H80xW202xL520	10	1000						
	LC6080-H-300-E	H80xW288xL480	16	1600						
	LC6080-H-300-B	H80xW285xL578	16	1600						
	LC6080-H-300-Y	H80xW459xL530	16	1600						
	LC6080-H-300-K	H80xW265xL531	20	2000						
	LC6080-H-300-C	H80xW490xL531	20	2000						
LC6080-H-300-X	H80xW340xL530	20	2000							
LC6080-H-300-F	H80xW424xL490	25	2500							
LC6080-H-300-S	H80xW490xL531	30	3000							
LCXX100	LC60100-H-300-A	H100xW202xL520	4	400	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC60100-H-300-E	H100xW288xL480	6	600						
	LC60100-H-300-B	H100xW285xL578	6	600						
	LC60100-H-300-Y	H100xW459xL530	6	600						
	LC60100-H-300-K	H100xW265xL531	7	700						






Ordering code for Rhombus series - <1.5m

\*Lumens @4000K, CRI 80


Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC4060-R-849	H60xW490xL849	15	1500	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4060-R-1024	H60xW591xL1024	18	1800						
	LC4060-R-1200	H60xW693xL1200	20	2000						
	LC6060-R-849	H60xW490xL849	30	3000						
LCXX80	LC4080-R-849	H80xW490xL849	15	1500						
	LC4080-R-1024	H80xW591xL1024	18	1800						
	LC4080-R-1200	H80xW693xL1200	20	2000						
	LC6080-R-849	H80xW490xL849	30	3000						
LCXX100	LC50100-R-849	H100xW490xL849	15	1500						
	LC50100-R-1024	H100xW591xL1024	18	1800						
	LC50100-R-1200	H100xW693xL1200	20	2000						
	LC60100-R-849	H100xW490xL849	30	3000						
	LC60100-R-1200	H100xW693xL1200	50	5000						

More shapes available

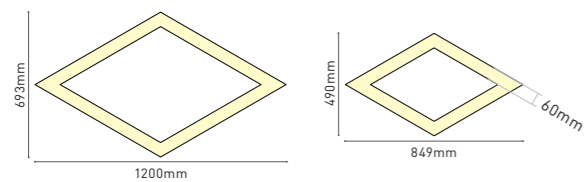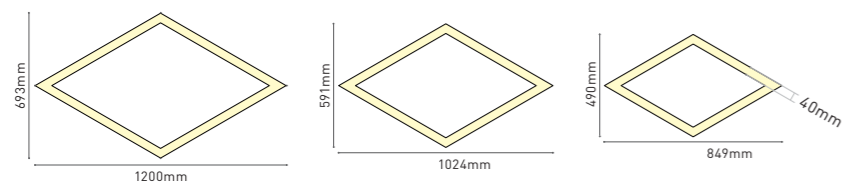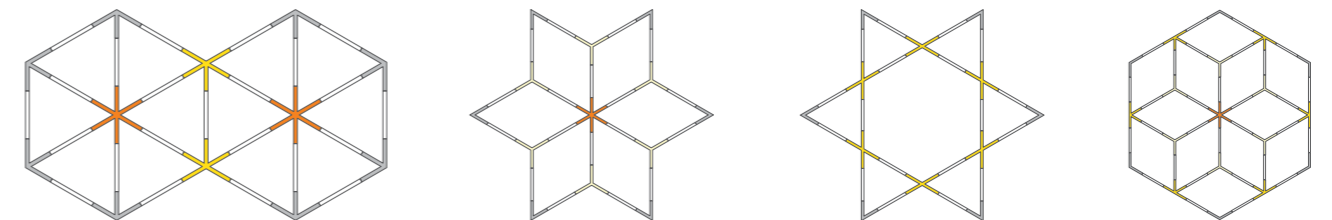

Case 1: if the length < 1.5m, profile & cover is only 1 part ;

Case 2: if the length > 1.5m, profile is connected by parts.

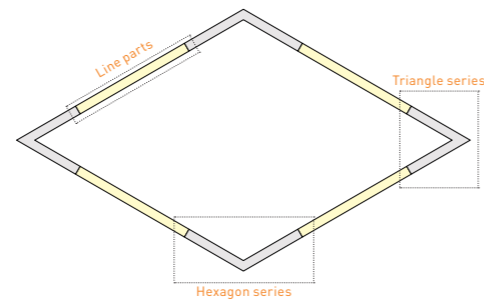

Accessories



a/mm	b/mm	c/mm
		900
40		1000
50		1100
60		1200
70		1300
80	300	1400
90	400	1500
100		1600
110		1700
120		1800
150		1900
		2000
		2200
		2400



Pendant series

Recessed series

Ordering code for Line parts

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC4060-L-500	H60xW40xL500	4	400	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4060-L-600	H60xW40xL600	4.5	450						
	LC4060-L-700	H60xW40xL700	5	500						
	LC4060-L-800	H60xW40xL800	6	600						
	LC4060-L-900	H60xW40xL900	7	700						
	LC4060-L-1000	H60xW40xL1000	7.5	750						
	LC4060-L-1100	H60xW40xL1100	8	800						
	LC4060-L-1200	H60xW40xL1200	9	900						
	LC4060-L-1300	H60xW40xL1300	10	1000						
	LC4060-L-1400	H60xW40xL1400	10.5	1050						
	LC4060-L-1500	H60xW40xL1500	11.5	1150						
	LC4060-L-1600	H60xW40xL1600	12.5	1250						
	LC4060-L-1700	H60xW40xL1700	13	1300						
	LC4060-L-1800	H60xW40xL1800	14	1400						
	LC4060-L-1900	H60xW40xL1900	15	1500						
	LC4060-L-2000	H60xW40xL2000	15.5	1550						
	LC4060-L-2100	H60xW40xL2100	16	1600						
	LC4060-L-2200	H60xW40xL2200	17	1700						
	LC4060-L-2300	H60xW40xL2300	18	1800						
	LC4060-L-2400	H60xW40xL2400	19	1900						
	LC5060-L-500	H60xW50xL500	4	400						
	LC5060-L-600	H60xW50xL600	4.5	450						
	LC5060-L-700	H60xW50xL700	5	500						
	LC5060-L-800	H60xW50xL800	6	600						
LC5060-L-900	H60xW50xL900	7	700							
LC5060-L-1000	H60xW50xL1000	7.5	750							
LC5060-L-1100	H60xW50xL1100	8	800							
LC5060-L-1200	H60xW50xL1200	9	900							
LC5060-L-1300	H60xW50xL1300	10	1000							
LC5060-L-1400	H60xW50xL1400	10.5	1050							
LC5060-L-1500	H60xW50xL1500	11.5	1150							
LC5060-L-1600	H60xW50xL1600	12.5	1250							
LC5060-L-1700	H60xW50xL1700	13	1300							
LC5060-L-1800	H60xW50xL1800	14	1400							
LC5060-L-1900	H60xW50xL1900	15	1500							
LC5060-L-2000	H60xW50xL2000	15.5	1550							
LC5060-L-2100	H60xW50xL2100	16	1600							
LC5060-L-2200	H60xW50xL2200	17	1700							
LC5060-L-2300	H60xW50xL2300	18	1800							
LC5060-L-2400	H60xW50xL2400	19	1900							

Ordering code for Line parts

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC6060-L-500	H60xW60xL500	9	900	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC6060-L-600	H60xW60xL600	10	1000						
	LC6060-L-700	H60xW60xL700	12	1200						
	LC6060-L-800	H60xW60xL800	14	1400						
	LC6060-L-900	H60xW60xL900	16	1600						
	LC6060-L-1000	H60xW60xL1000	17	1700						
	LC6060-L-1100	H60xW60xL1100	19	1900						
	LC6060-L-1200	H60xW60xL1200	21	2100						
	LC6060-L-1300	H60xW60xL1300	23	2300						
	LC6060-L-1400	H60xW60xL1400	25	2500						
	LC6060-L-1500	H60xW60xL1500	26	2600						
	LC6060-L-1600	H60xW60xL1600	28	2800						
	LC6060-L-1700	H60xW60xL1700	30	3000						
	LC6060-L-1800	H60xW60xL1800	31	3100						
	LC6060-L-1900	H60xW60xL1900	33	3300						
	LC6060-L-2000	H60xW60xL2000	35	3500						
	LC6060-L-2100	H60xW60xL2100	37	3700						
	LC6060-L-2200	H60xW60xL2200	39	3900						
	LC6060-L-2300	H60xW60xL2300	40	4000						
	LC6060-L-2400	H60xW60xL2400	42	4200						
	LC8060-L-500	H60xW80xL500	13	1300						
	LC8060-L-600	H60xW80xL600	16	1600						
	LC8060-L-700	H60xW80xL700	19	1900						
	LC8060-L-800	H60xW80xL800	22	2200						
	LC8060-L-900	H60xW80xL900	24	2400						
	LC8060-L-1000	H60xW80xL1000	27	2700						
	LC8060-L-1100	H60xW80xL1100	30	3000						
	LC8060-L-1200	H60xW80xL1200	32	3200						
	LC8060-L-1300	H60xW80xL1300	35	3500						
	LC8060-L-1400	H60xW80xL1400	38	3800						
	LC8060-L-1500	H60xW80xL1500	41	4100						
	LC8060-L-1600	H60xW80xL1600	43	4300						
LC8060-L-1700	H60xW80xL1700	46	4600							
LC8060-L-1800	H60xW80xL1800	49	4900							
LC8060-L-1900	H60xW80xL1900	51	5100							
LC8060-L-2000	H60xW80xL2000	54	5400							
LC8060-L-2100	H60xW80xL2100	57	5700							
LC8060-L-2200	H60xW80xL2200	59	5900							
LC8060-L-2300	H60xW80xL2300	62	6200							
LC8060-L-2400	H60xW80xL2400	65	6500							

Ordering code for Line parts

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LC4080-L-500	H80xW40xL500	4	400	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4080-L-600	H80xW40xL600	4.5	450						
	LC4080-L-700	H80xW40xL700	5	500						
	LC4080-L-800	H80xW40xL800	6	600						
	LC4080-L-900	H80xW40xL900	7	700						
	LC4080-L-1000	H80xW40xL1000	7.5	750						
	LC4080-L-1100	H80xW40xL1100	8	800						
	LC4080-L-1200	H80xW40xL1200	9	900						
	LC4080-L-1300	H80xW40xL1300	10	1000						
	LC4080-L-1400	H80xW40xL1400	10.5	1050						
	LC4080-L-1500	H80xW40xL1500	11.5	1150						
	LC4080-L-1600	H80xW40xL1600	12.5	1250						
	LC4080-L-1700	H80xW40xL1700	13	1300						
	LC4080-L-1800	H80xW40xL1800	14	1400						
	LC4080-L-1900	H80xW40xL1900	15	1500						
	LC4080-L-2000	H80xW40xL2000	15.5	1550						
	LC4080-L-2100	H80xW40xL2100	16	1600						
	LC4080-L-2200	H80xW40xL2200	17	1700						
	LC4080-L-2300	H80xW40xL2300	18	1800						
	LC4080-L-2400	H80xW40xL2400	19	1900						
	LC6080-L-500	H80xW60xL500	9	900						
	LC6080-L-600	H80xW60xL600	10	1000						
	LC6080-L-700	H80xW60xL700	12	1200						
	LC6080-L-800	H80xW60xL800	14	1400						
	LC6080-L-900	H80xW60xL900	16	1600						
	LC6080-L-1000	H80xW60xL1000	17	1700						
	LC6080-L-1100	H80xW60xL1100	19	1900						
	LC6080-L-1200	H80xW60xL1200	21	2100						
	LC6080-L-1300	H80xW60xL1300	23	2300						
	LC6080-L-1400	H80xW60xL1400	25	2500						
	LC6080-L-1500	H80xW60xL1500	26	2600						
	LC6080-L-1600	H80xW60xL1600	28	2800						
LC6080-L-1700	H80xW60xL1700	30	3000							
LC6080-L-1800	H80xW60xL1800	31	3100							
LC6080-L-1900	H80xW60xL1900	33	3300							
LC6080-L-2000	H80xW60xL2000	35	3500							
LC6080-L-2100	H80xW60xL2100	37	3700							
LC6080-L-2200	H80xW60xL2200	39	3900							
LC6080-L-2300	H80xW60xL2300	40	4000							
LC6080-L-2400	H80xW60xL2400	42	4200							

Ordering code for Line parts

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LC8080-L-500	H80xW80xL500	13	1300	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC8080-L-600	H80xW80xL600	16	1600						
	LC8080-L-700	H80xW80xL700	19	1900						
	LC8080-L-800	H80xW80xL800	22	2200						
	LC8080-L-900	H80xW80xL900	24	2400						
	LC8080-L-1000	H80xW80xL1000	27	2700						
	LC8080-L-1100	H80xW80xL1100	30	3000						
	LC8080-L-1200	H80xW80xL1200	32	3200						
	LC8080-L-1300	H80xW80xL1300	35	3500						
	LC8080-L-1400	H80xW80xL1400	38	3800						
	LC8080-L-1500	H80xW80xL1500	41	4100						
	LC8080-L-1600	H80xW80xL1600	43	4300						
	LC8080-L-1700	H80xW80xL1700	46	4600						
	LC8080-L-1800	H80xW80xL1800	49	4900						
	LC8080-L-1900	H80xW80xL1900	51	5100						
	LC8080-L-2000	H80xW80xL2000	54	5400						
	LC8080-L-2100	H80xW80xL2100	57	5700						
	LC8080-L-2200	H80xW80xL2200	59	5900						
	LC8080-L-2300	H80xW80xL2300	62	6200						
	LC8080-L-2400	H80xW80xL2400	65	6500						
	LC12080-L-500	H80xW120xL500	18	1800						
	LC12080-L-600	H80xW120xL600	22	2200						
	LC12080-L-700	H80xW120xL700	26	2600						
	LC12080-L-800	H80xW120xL800	30	3000						
	LC12080-L-900	H80xW120xL900	33	3300						
	LC12080-L-1000	H80xW120xL1000	37	3700						
	LC12080-L-1100	H80xW120xL1100	40	4000						
	LC12080-L-1200	H80xW120xL1200	44	4400						
	LC12080-L-1300	H80xW120xL1300	48	4800						
	LC12080-L-1400	H80xW120xL1400	52	5200						
	LC12080-L-1500	H80xW120xL1500	55	5500						
	LC12080-L-1600	H80xW120xL1600	59	5900						
LC12080-L-1700	H80xW120xL1700	63	6300							
LC12080-L-1800	H80xW120xL1800	67	6700							
LC12080-L-1900	H80xW120xL1900	70	7000							
LC12080-L-2000	H80xW120xL2000	74	7400							
LC12080-L-2100	H80xW120xL2100	77	7700							
LC12080-L-2200	H80xW120xL2200	81	8100							
LC12080-L-2300	H80xW120xL2300	85	8500							
LC12080-L-2400	H80xW120xL2400	88	8800							

Ordering code for Line parts

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX100	LC60100-L-500	H100xW60xL500	9	900	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC60100-L-600	H100xW60xL600	10	1000						
	LC60100-L-700	H100xW60xL700	12	1200						
	LC60100-L-800	H100xW60xL800	14	1400						
	LC60100-L-900	H100xW60xL900	16	1600						
	LC60100-L-1000	H100xW60xL1000	17	1700						
	LC60100-L-1100	H100xW60xL1100	19	1900						
	LC60100-L-1200	H100xW60xL1200	21	2100						
	LC60100-L-1300	H100xW60xL1300	23	2300						
	LC60100-L-1400	H100xW60xL1400	25	2500						
	LC60100-L-1500	H100xW60xL1500	26	2600						
	LC60100-L-1600	H100xW60xL1600	28	2800						
	LC60100-L-1700	H100xW60xL1700	30	3000						
	LC60100-L-1800	H100xW60xL1800	31	3100						
	LC60100-L-1900	H100xW60xL1900	33	3300						
	LC60100-L-2000	H100xW60xL2000	35	3500						
	LC60100-L-2100	H100xW60xL2100	37	3700						
	LC60100-L-2200	H100xW60xL2200	39	3900						
	LC60100-L-2300	H100xW60xL2300	40	4000						
	LC60100-L-2400	H100xW60xL2400	42	4200						
	LC80100-L-500	H100xW80xL500	13	1300						
	LC80100-L-600	H100xW80xL600	16	1600						
	LC80100-L-700	H100xW80xL700	19	1900						
	LC80100-L-800	H100xW80xL800	22	2200						
	LC80100-L-900	H100xW80xL900	24	2400						
	LC80100-L-1000	H100xW80xL1000	27	2700						
	LC80100-L-1100	H100xW80xL1100	30	3000						
	LC80100-L-1200	H100xW80xL1200	32	3200						
	LC80100-L-1300	H100xW80xL1300	35	3500						
	LC80100-L-1400	H100xW80xL1400	38	3800						
	LC80100-L-1500	H100xW80xL1500	41	4100						
	LC80100-L-1600	H100xW80xL1600	43	4300						
LC80100-L-1700	H100xW80xL1700	46	4600							
LC80100-L-1800	H100xW80xL1800	49	4900							
LC80100-L-1900	H100xW80xL1900	51	5100							
LC80100-L-2000	H100xW80xL2000	54	5400							
LC80100-L-2100	H100xW80xL2100	57	5700							
LC80100-L-2200	H100xW80xL2200	59	5900							
LC80100-L-2300	H100xW80xL2300	62	6200							
LC80100-L-2400	H100xW80xL2400	65	6500							

## Project Series-Pendant

- Can be ordered with CAD files (design drawings) ;
- High efficacy of the luminaire, Max>120lm/W ;
- PC cover and soft cover alternative ;
- Uniform luminous area, 1pcs cover is available and lighting without flicker ;
- High-quality surface treatment, colors of white/black/silver/gold and customized ;
- Smarter disassembling for the projects, smaller package & cheaper shipment ;
- Providing simulation of Dialux, more accurate datas for the project ;
- Dali/Push/Remote/Triac/0-10V/Tunable/Emergency dimming available ;
- Luminous area ratio at least 91.7% (eg. LC6060 LC6080) ;
- More convenient for connection & installation ;



Soft cover, >100m/reel

## Project Series-Recessed

- Can be ordered with CAD files (design drawings) ;
- High efficacy of the luminaire, Max>120lm/W ;
- PC cover and soft cover alternative ;
- Uniform luminous area, 1pcs cover is available and lighting without flicker ;
- High-quality surface treatment, colors of white/black/silver/gold and customized ;
- Smarter disassembling for the projects, smaller package & cheaper shipment ;
- Providing simulation of Dialux, more accurate datas for the project ;
- Dali/Push/Remote/Triac/0-10V/Tunable/Emergency dimming available ;
- Luminous area ratio at least 91.7% [eg. LC6060 LC6080] ;
- More convenient for connection & installation ;



PC cover, 50m/reel

# Constellations


Aries



Taurus




Gemini



Libra



Scorpio



Sagittarius




Cancer



Leo



Virgo



Capricorn



Aquarius



Pisces




- ♦ Standard size ;
- ♦ 5 years warranty ;
- ♦ Built-in driver/Ceiling box ;
- ♦ Order without MOQ, 1 pcs is available ;
- ♦ Pendant/Surface mounted/Recessed installation ;
- ♦ Dali/Dimmer/Remote/Triac/0-10V/Tunable/Emergency dimming available ;
- ♦ Luminaire efficacy up to 120 lm/W, uniform luminous area and no flicker ;
- ♦ High-quality surface treatment, colors of white/black/silver/gold and customized .

Aries



Sections

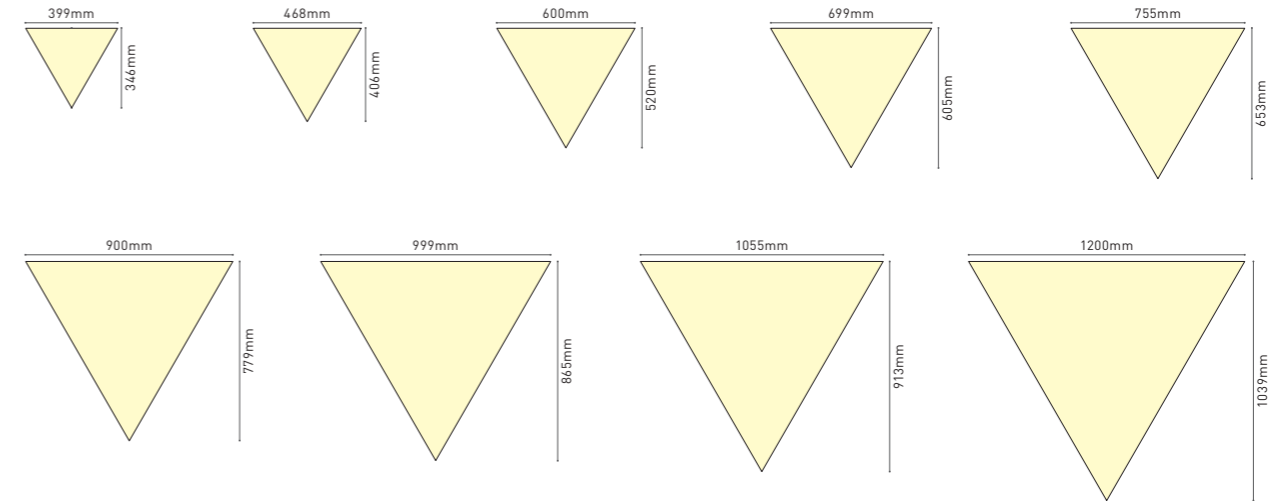

Ordering code for Aries series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-AR-399	H80xW346xL399	12	1200	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX80-AR-468	H80xW406xL468	16	1600						
	LCXX80-AR-600	H80xW520xL600	30	3000						
	LCXX80-AR-699	H80xW605xL699	40	4000						
	LCXX80-AR-755	H80xW653xL755	45	4500						
	LCXX80-AR-900	H80xW779xL900	60	6000						
	LCXX80-AR-999	H80xW865xL999	70	7000						
	LCXX80-AR-1055	H80xW913xL1055	80	8000						
LCXX100	LCXX100-AR-399	H100xW346xL399	12	1200	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX100-AR-468	H100xW406xL468	16	1600						
	LCXX100-AR-600	H100xW520xL600	30	3000						
	LCXX100-AR-699	H100xW605xL699	40	4000						
	LCXX100-AR-755	H100xW653xL755	45	4500						
	LCXX100-AR-900	H100xW779xL900	60	6000						
	LCXX100-AR-999	H100xW865xL999	70	7000						
	LCXX100-AR-1055	H100xW913xL1055	80	8000						
LCXX100-AR-1200	H100xW1039xL1200	100	10000							

Accessories




# Taurus



UGR

Normal

## Sections

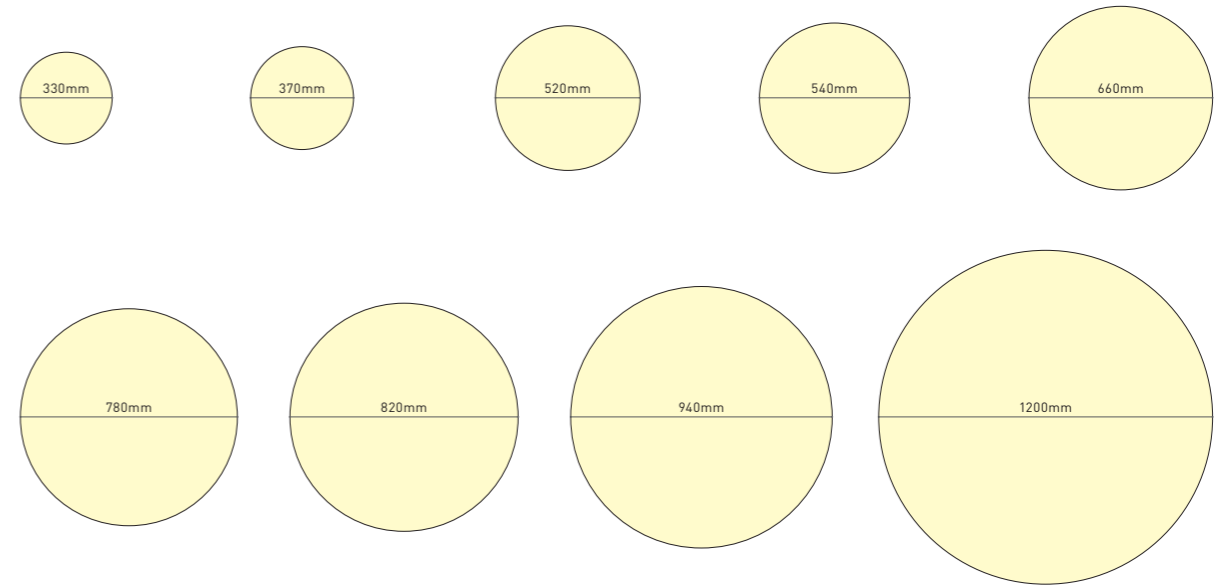

## Ordering code for Taurus series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-TA-330	H80xW330xL330	15	1500	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX80-TA-370	H80xW370xL370	20	2000						
	LCXX80-TA-520	H80xW520xL520	35	3500						
	LCXX80-TA-540	H80xW540xL540	40	4000						
	LCXX80-TA-660	H80xW660xL660	60	6000						
	LCXX80-TA-780	H80xW780xL780	80	8000						
	LCXX80-TA-820	H80xW820xL820	90	9000						
	LCXX80-TA-940	H80xW940xL940	120	12000						
LCXX100	LCXX100-TA-330	H100xW330xL330	15	1500	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX100-TA-370	H100xW370xL370	20	2000						
	LCXX100-TA-520	H100xW520xL520	35	3500						
	LCXX100-TA-540	H100xW540xL540	40	4000						
	LCXX100-TA-660	H100xW660xL660	60	6000						
	LCXX100-TA-780	H100xW780xL780	80	8000						
	LCXX100-TA-820	H100xW820xL820	90	9000						
	LCXX100-TA-940	H100xW940xL940	120	12000						
LCXX100-TA-1200	H100xW1200xL1200	200	20000							

## Accessories



CB CE RoHS FLICKER FREE 5 YEARS WARRANTY



Gemini

Cancer

CB CE RoHS FLICKER FREE 5 YEARS WARRANTY

CB CE RoHS FLICKER FREE 5 YEARS WARRANTY

GOLDEN RATIO DESIGN

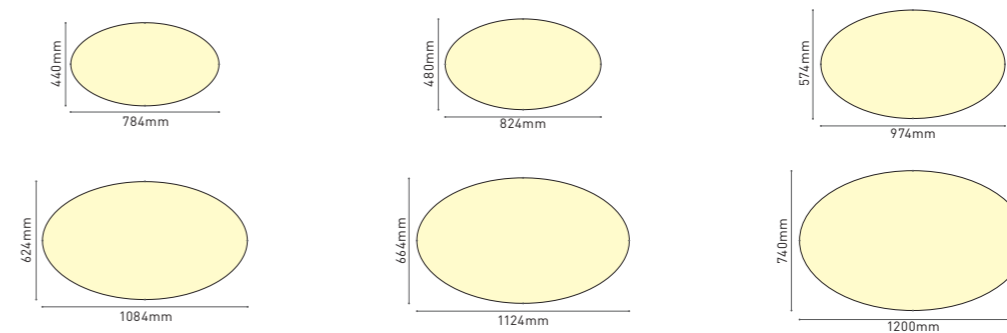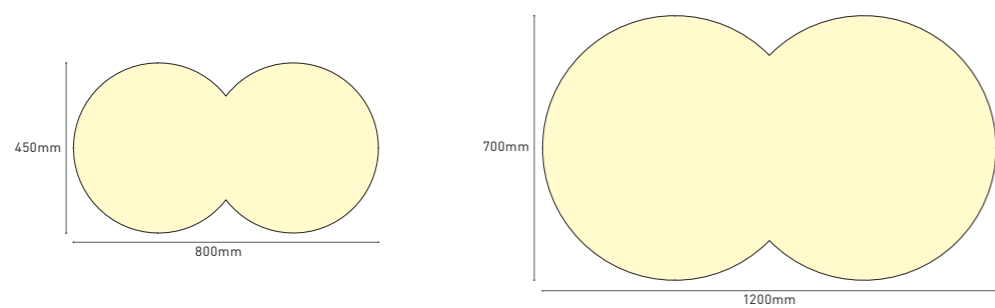

Ordering code for Gemini series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-GE-800	H80xW450xL800	50	5000	Dali Push Triac 0-10V Remote Tunable	3000K	>80	200-240	White	CE
	LCXX80-GE-1200	H80xW700xL1200	120	12000		4000K			>90	Black
LCXX100	LCXX100-GE-800	H100xW450xL800	50	5000	Dali Push Triac 0-10V Remote Tunable	6000K	>95	100-277	Silver	SAA
	LCXX100-GE-1200	H100xW700xL1200	120	12000		RGB			>95	Gold

Accessories





Ordering code for Cancer series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-CA-784	H80xW440xL784	45	4500	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX80-CA-824	H80xW480xL824	55	5500						
	LCXX80-CA-974	H80xW574xL974	75	7500						
	LCXX80-CA-1084	H80xW624xL1084	90	9000						
	LCXX80-CA-1124	H80xW664xL1124	100	10000						
	LCXX80-CA-1200	H80xW740xL1200	120	12000						
LCXX100	LCXX100-CA-784	H100xW440xL784	45	4500	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX100-CA-824	H100xW480xL824	55	5500						
	LCXX100-CA-974	H100xW574xL974	75	7500						
	LCXX100-CA-1084	H100xW624xL1084	90	9000						
	LCXX100-CA-1124	H100xW664xL1124	100	10000						
	LCXX100-CA-1200	H100xW740xL1200	120	12000						

Constellations

Constellations

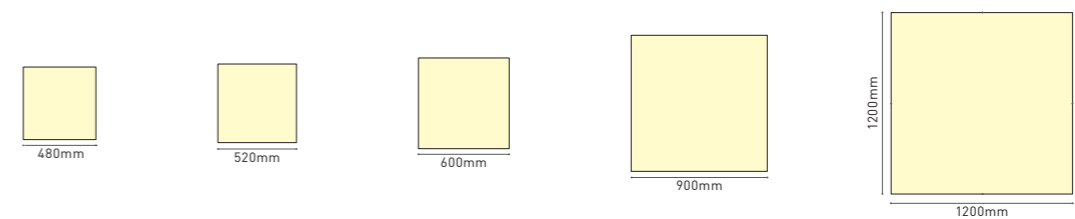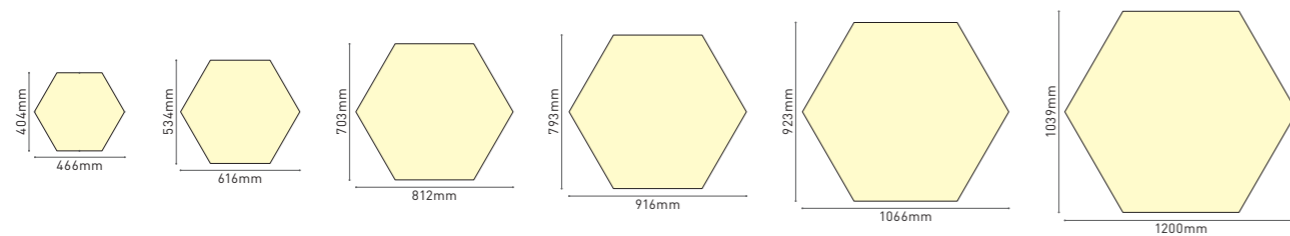

Ordering code for Leo series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-LE-466	H80xW404xL466	25	2500	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX80-LE-616	H80xW534xL616	40	4000						
	LCXX80-LE-812	H80xW703xL812	75	7500						
	LCXX80-LE-916	H80xW793xL916	90	9000						
	LCXX80-LE-1066	H80xW923xL1066	120	12000						
LCXX100	LCXX100-LE-1200	H80xW1039xL1200	160	16000						
	LCXX100-LE-466	H100xW404xL466	25	2500						
	LCXX100-LE-616	H100xW534xL616	40	4000						
	LCXX100-LE-812	H100xW703xL812	75	7500						
	LCXX100-LE-916	H100xW793xL916	90	9000						
	LCXX100-LE-1066	H100xW923xL1066	120	12000						
LCXX100-LE-1200	H100xW1039xL1200	160	16000							

Ordering code for Virgo series


\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-VI-480	H80xW480xL480	40	4000	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX80-VI-520	H80xW520xL520	50	5000						
	LCXX80-VI-600	H80xW600xL600	60	6000						
	LCXX80-VI-900	H80xW900xL900	140	14000						
	LCXX80-VI-1200	H80xW1200xL1200	250	25000						
LCXX100	LCXX100-VI-480	H100xW480xL480	40	4000						
	LCXX100-VI-520	H100xW520xL520	50	5000						
	LCXX100-VI-600	H100xW600xL600	60	6000						
	LCXX100-VI-900	H100xW900xL900	140	14000						
	LCXX100-VI-1200	H100xW1200xL1200	250	25000						

Libra



Sections

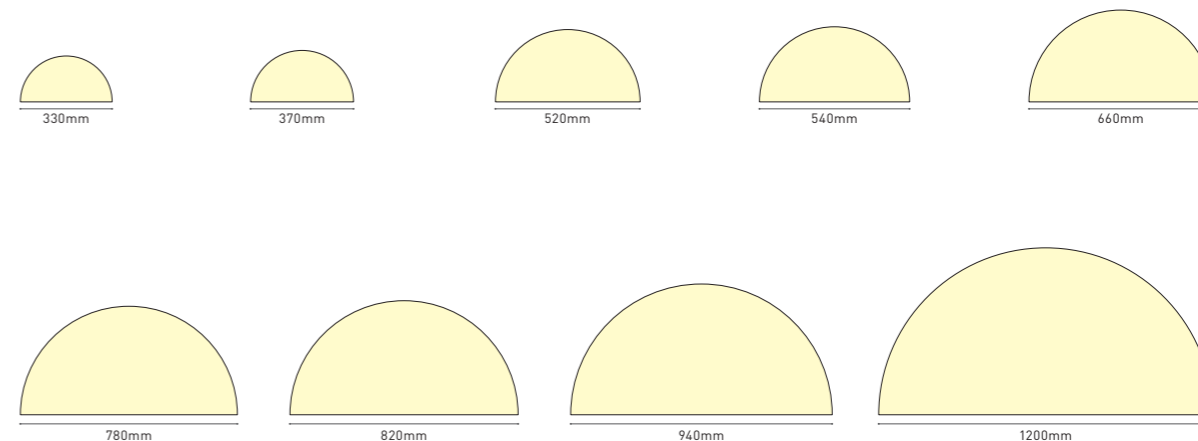

Ordering code for Libra series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-LI-330	H80xW165xL330	8	800	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX80-LI-370	H80xW185xL370	10	1000						
	LCXX80-LI-520	H80xW260xL520	18	1800						
	LCXX80-LI-540	H80xW270xL540	20	2000						
	LCXX80-LI-660	H80xW330xL660	30	3000						
	LCXX80-LI-780	H80xW390xL780	40	4000						
	LCXX80-LI-820	H80xW410xL820	45	4500						
	LCXX80-LI-940	H80xW470xL940	60	6000						
LCXX100	LCXX100-LI-330	H100xW165xL330	8	800	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX100-LI-370	H100xW185xL370	10	1000						
	LCXX100-LI-520	H100xW260xL520	18	1800						
	LCXX100-LI-540	H100xW270xL540	20	2000						
	LCXX100-LI-660	H100xW330xL660	30	3000						
	LCXX100-LI-780	H100xW390xL780	40	4000						
	LCXX100-LI-820	H100xW410xL820	45	4500						
	LCXX100-LI-940	H100xW470xL940	60	6000						
LCXX100-LI-1200	H100xW600xL1200	100	1000							

Accessories



# Scorpio



## Sections



## Ordering code for Scorpio series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-SC-600	H80xW600xL600	60	6000	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX80-SC-780	H80xW780xL780	100	10000						
	LCXX80-SC-820	H80xW820xL820	110	11000						
	LCXX80-SC-900	H80xW900xL900	130	13000						
	LCXX80-SC-952	H80xW952xL952	150	15000						
	LCXX80-SC-1036	H80xW1036xL1036	180	18000						
	LCXX80-SC-1080	H80xW1080xL1080	190	19000						
	LCXX80-SC-1120	H80xW1120xL1120	210	21000						
LCXX100	LCXX100-SC-600	H100xW600xL600	60	6000						
	LCXX100-SC-780	H100xW780xL780	100	10000						
	LCXX100-SC-820	H100xW820xL820	110	11000						
	LCXX100-SC-900	H100xW900xL900	130	13000						
	LCXX100-SC-952	H100xW952xL952	150	15000						
	LCXX100-SC-1036	H100xW1036xL1036	180	18000						
	LCXX100-SC-1080	H100xW1080xL1080	190	19000						
	LCXX100-SC-1120	H100xW1120xL1120	210	21000						
LCXX100-SC-1200	H100xW1200xL1200	240	24000							


## Accessories



## Sagittarius



CB CE RoHS FLICKER FREE 5 YEARS WARRANTY

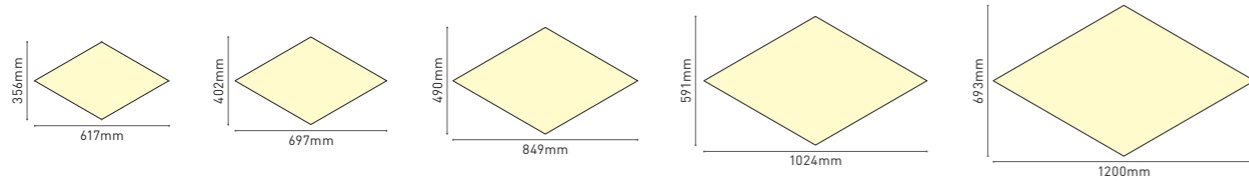

### Ordering code for Sagittarius series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-SA-617	H80xW356xL617	20	2000	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX80-SA-697	H80xW402xL697	25	2500						
	LCXX80-SA-849	H80xW490xL849	35	3500						
	LCXX80-SA-1024	H80xW591xL1024	50	5000						
	LCXX80-SA-1200	H80xW693xL1200	70	7000						
LCXX100	LCXX100-SA-617	H100xW356xL617	20	2000	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX100-SA-697	H100xW402xL697	25	2500						
	LCXX100-SA-849	H100xW490xL849	35	3500						
	LCXX100-SA-1024	H100xW591xL1024	50	5000						
	LCXX100-SA-1200	H100xW693xL1200	70	7000						


### Accessories



## Capricon



CB CE RoHS FLICKER FREE 5 YEARS WARRANTY

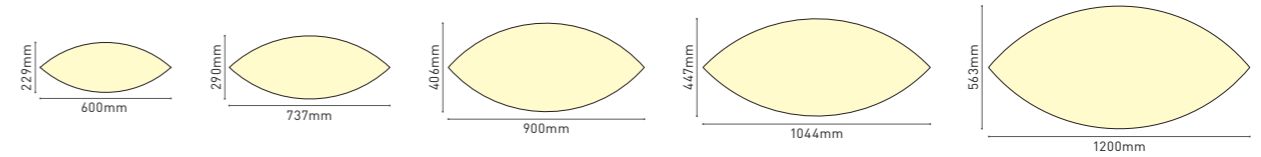

### Ordering code for Capricon series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-CN-600	H80xW229xL600	16	1600	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX80-CN-737	H80xW290xL737	25	2500						
	LCXX80-CN-900	H80xW406xL900	45	4500						
	LCXX80-CN-1044	H80xW447xL1044	55	5500						
	LCXX80-CN-1200	H80xW563xL1200	80	8000						
LCXX100	LCXX100-CN-600	H100xW229xL600	16	1600	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX100-CN-737	H100xW290xL737	25	2500						
	LCXX100-CN-900	H100xW406xL900	45	4500						
	LCXX100-CN-1044	H100xW447xL1044	55	5500						
	LCXX100-CN-1200	H100xW563xL1200	80	8000						


### Accessories




# Aquarius



## Sections

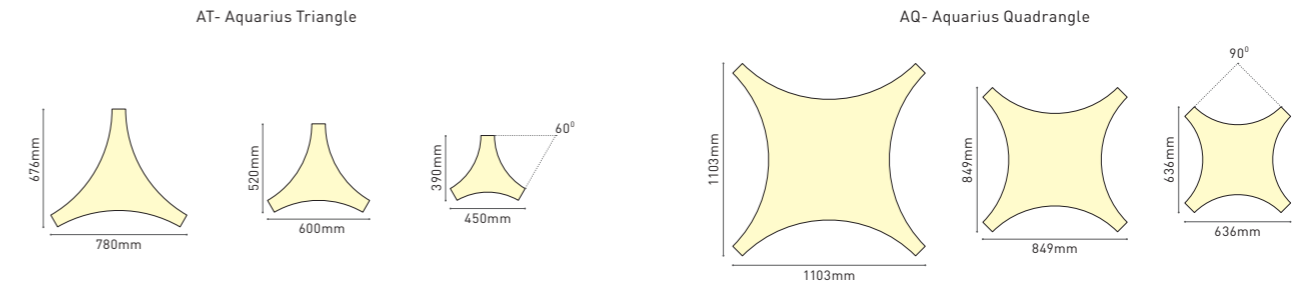

## More shapes available

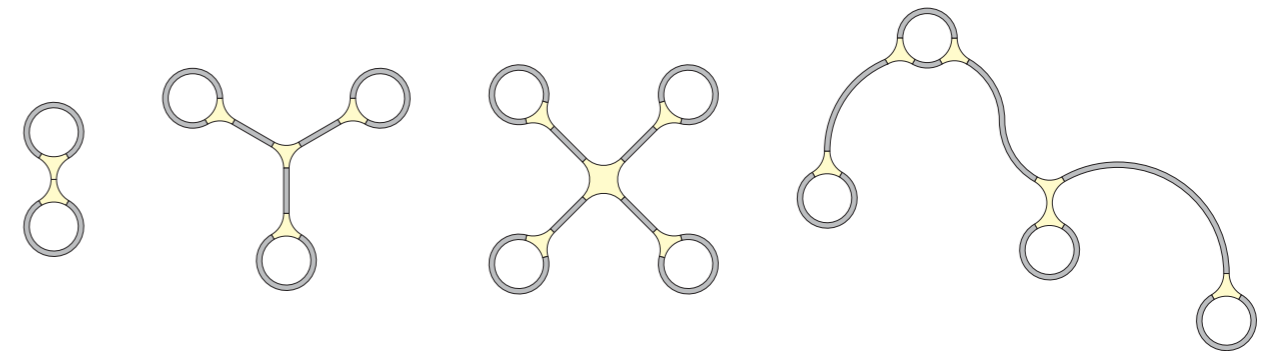

## Ordering code for Aquarius series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W shape	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-AT-450	H80xW390xL450	10	1000	Non Dali Push Tria 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX80-AT-600	H80xW520xL600	18	1800						
	LCXX80-AT-780	H80xW676xL780	25	2500						
	LCXX80-AQ-636	H80xW636xL636	38	3800						
	LCXX80-AQ-849	H80xW849xL849	67	6700						
LCXX100	LCXX100-AQ-1103	H80xW1103xL1103	110	11000						
	LCXX100-AT-450	H100xW390xL450	10	1000						
	LCXX100-AT-600	H100xW520xL600	18	1800						
	LCXX100-AT-780	H100xW676xL780	25	2500						
	LCXX100-AQ-636	H100xW636xL636	38	3800						
LCXX100-AQ-849	H100xW849xL849	67	6700							
LCXX100-AQ-1103	H100xW1103xL1103	110	11000							

## Accessories




Constellations

Constellations

Pisces



Sections

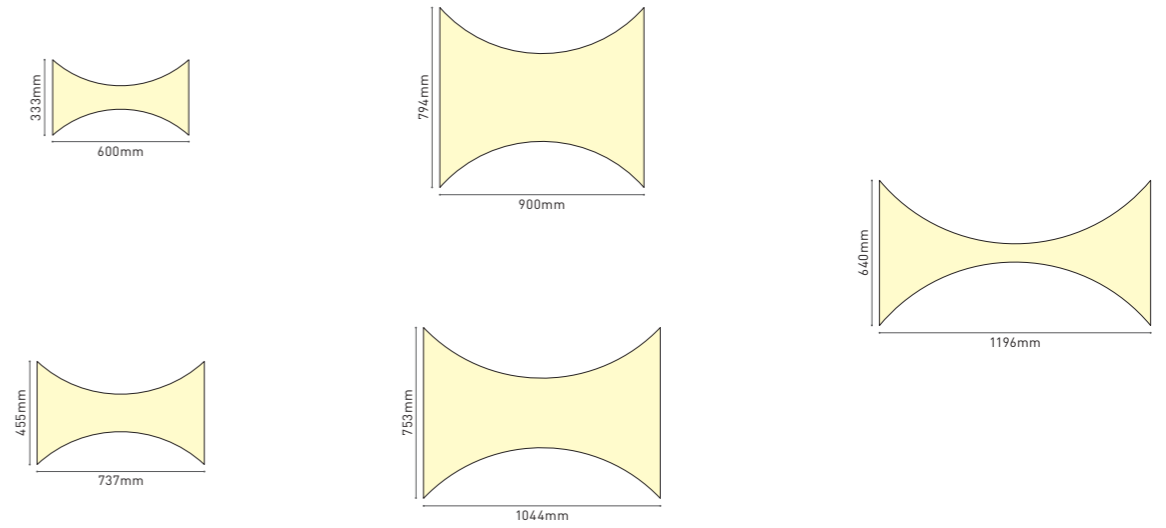

Ordering code for Pisces series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LCXX80-PI-600	H80xW333xL600	18	1800	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX80-PI-737	H80xW455xL737	30	3000						
	LCXX80-PI-900	H80xW794xL900	80	8000						
	LCXX80-PI-1044	H80xW753xL1044	80	8000						
	LCXX80-PI-1196	H80xW640xL1196	50	5000						
LCXX100	LCXX100-PI-600	H100xW333xL600	18	1800	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LCXX100-PI-737	H100xW455xL737	30	3000						
	LCXX100-PI-900	H100xW794xL900	80	8000						
	LCXX100-PI-1044	H100xW753xL1044	80	8000						
	LCXX100-PI-1196	H100xW640xL1196	50	5000						

Accessories




## Linear series




- Standard size 0.5m~2.4m ;
- Order without MOQ, 1 pcs is available ;
- Pendant/Surface mounted/Recessed installation ;
- L/T/X connectors without gap (1 pcs cover) ;
- **CNC end caps** without holes for screws ;
- Cover can be 100m/reel, more perfect visual performance ;
- Luminaire efficacy up to 120 lm/W, uniform luminous area and no flicker ;
- DALI/Dimmer/Remote/Triac/0-10V/Tunable/Emergency dimming available ;
- High-quality surface treatment, colors of white/black /silver/gold and customized ;
- More convenient for connection & installation .

## Sections


### Pendant series NEW DESIGN

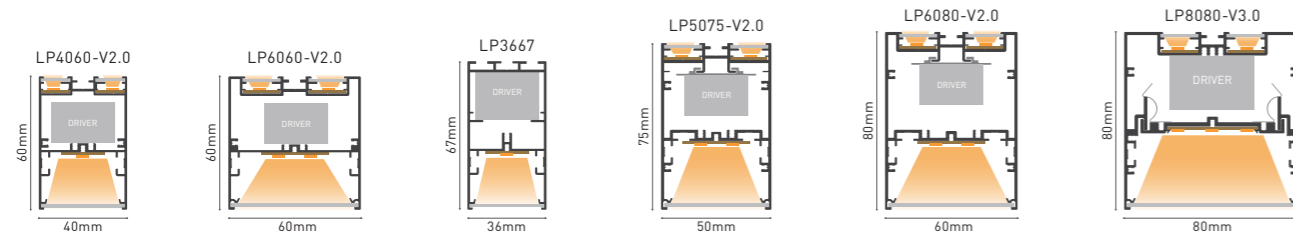

### Recessed series

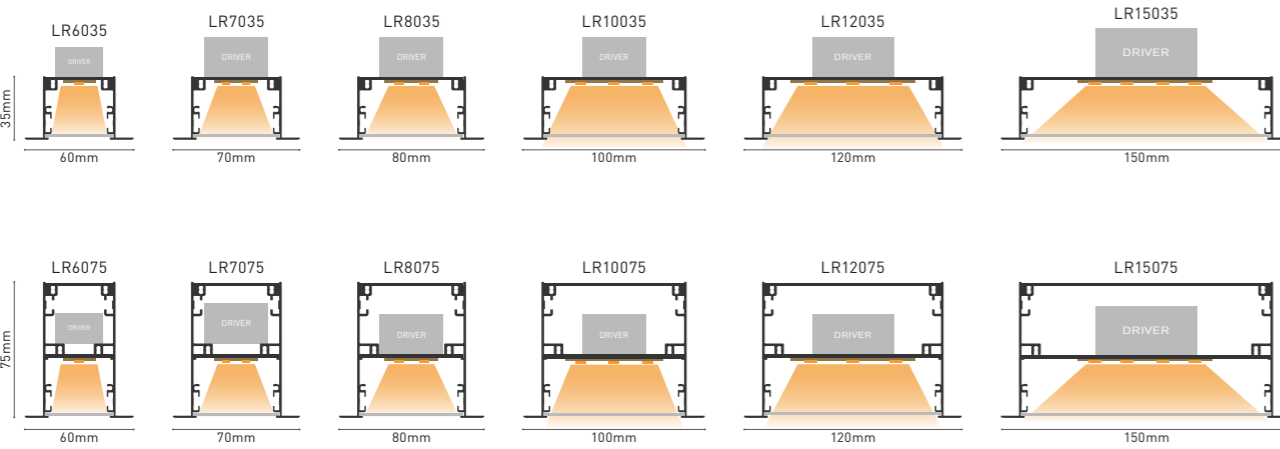

### Corners

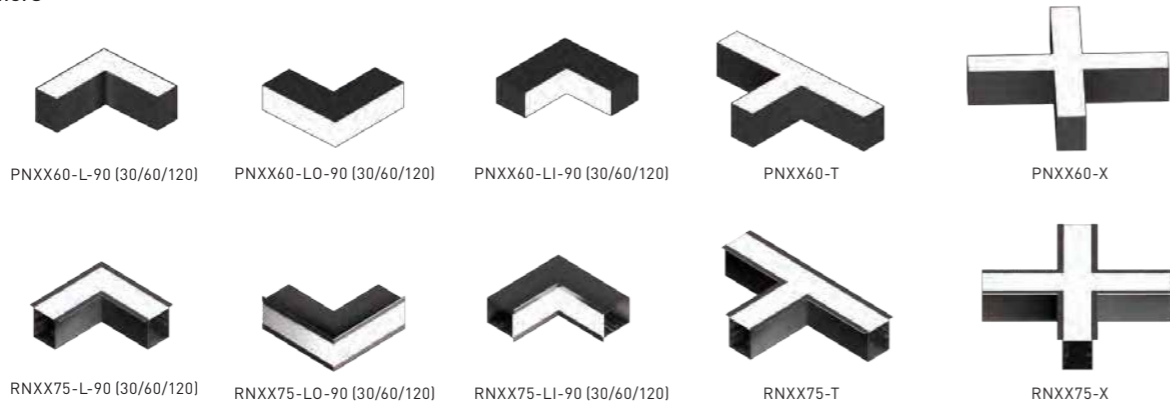

### Accessories



### Ordering code for Linear series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LPXX60	LP4060-L-500	H60xW40xL500	4	400	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LP4060-L-600	H60xW40xL600	4.5	450						
	LP4060-L-700	H60xW40xL700	5	500						
	LP4060-L-800	H60xW40xL800	6	600						
	LP4060-L-900	H60xW40xL900	7	700						
	LP4060-L-1000	H60xW40xL1000	7.5	750						
	LP4060-L-1100	H60xW40xL1100	8	800						
	LP4060-L-1200	H60xW40xL1200	9	900						
	LP4060-L-1300	H60xW40xL1300	10	1000						
	LP4060-L-1400	H60xW40xL1400	10.5	1050						
	LP4060-L-1500	H60xW40xL1500	11.5	1150						
	LP4060-L-1600	H60xW40xL1600	12.5	1250						
	LP4060-L-1700	H60xW40xL1700	13	1300						
	LP4060-L-1800	H60xW40xL1800	14	1400						
	LP4060-L-1900	H60xW40xL1900	15	1500						
	LP4060-L-2000	H60xW40xL2000	15.5	1550						
	LP4060-L-2100	H60xW40xL2100	16	1600						
	LP4060-L-2200	H60xW40xL2200	17	1700						
	LP4060-L-2300	H60xW40xL2300	18	1800						
	LP4060-L-2400	H60xW40xL2400	19	1900						
	LP6060-L-500	H60xW60xL500	9	900						
	LP6060-L-600	H60xW60xL600	10	1000						
	LP6060-L-700	H60xW60xL700	12	1200						
	LP6060-L-800	H60xW60xL800	14	1400						
	LP6060-L-900	H60xW60xL900	16	1600						
	LP6060-L-1000	H60xW60xL1000	17	1700						
	LP6060-L-1100	H60xW60xL1100	19	1900						
	LP6060-L-1200	H60xW60xL1200	21	2100						
	LP6060-L-1300	H60xW60xL1300	23	2300						
	LP6060-L-1400	H60xW60xL1400	25	2500						
	LP6060-L-1500	H60xW60xL1500	26	2600						
	LP6060-L-1600	H60xW60xL1600	28	2800						
	LP6060-L-1700	H60xW60xL1700	30	3000						
	LP6060-L-1800	H60xW60xL1800	31	3100						
	LP6060-L-1900	H60xW60xL1900	33	3300						
	LP6060-L-2000	H60xW60xL2000	35	3500						
	LP6060-L-2100	H60xW60xL2100	37	3700						
	LP6060-L-2200	H60xW60xL2200	39	3900						
	LP6060-L-2300	H60xW60xL2300	40	4000						
	LP6060-L-2400	H60xW60xL2400	42	4200						

Ordering code for Linear series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LPXX70	LP3667-L-500	H67xW36xL500	4	400	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LP3667-L-600	H67xW36xL600	4.5	450						
	LP3667-L-700	H67xW36xL700	5	500						
	LP3667-L-800	H67xW36xL800	6	600						
	LP3667-L-900	H67xW36xL900	7	700						
	LP3667-L-1000	H67xW36xL1000	7.5	750						
	LP3667-L-1100	H67xW36xL1100	8	800						
	LP3667-L-1200	H67xW36xL1200	9	900						
	LP3667-L-1300	H67xW36xL1300	10	1000						
	LP3667-L-1400	H67xW36xL1400	10.5	1050						
	LP3667-L-1500	H67xW36xL1500	11.5	1150						
	LP3667-L-1600	H67xW36xL1600	12.5	1250						
	LP3667-L-1700	H67xW36xL1700	13	1300						
	LP3667-L-1800	H67xW36xL1800	14	1400						
	LP3667-L-1900	H67xW36xL1900	15	1500						
	LP3667-L-2000	H67xW36xL2000	15.5	1550						
	LP3667-L-2100	H67xW36xL2100	16	1600						
	LP3667-L-2200	H67xW36xL2200	17	1700						
	LP3667-L-2300	H67xW36xL2300	18	1800						
	LP3667-L-2400	H67xW36xL2400	19	1900						
LPXX80	LP8080-L-500	H80xW80xL500	13	1300	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LP8080-L-600	H80xW80xL600	16	1600						
	LP8080-L-700	H80xW80xL700	19	1900						
	LP8080-L-800	H80xW80xL800	22	2200						
	LP8080-L-900	H80xW80xL900	24	2400						
	LP8080-L-1000	H80xW80xL1000	27	2700						
	LP8080-L-1100	H80xW80xL1100	30	3000						
	LP8080-L-1200	H80xW80xL1200	32	3200						
	LP8080-L-1300	H80xW80xL1300	35	3500						
	LP8080-L-1400	H80xW80xL1400	38	3800						
	LP8080-L-1500	H80xW80xL1500	41	4100						
	LP8080-L-1600	H80xW80xL1600	43	4300						
	LP8080-L-1700	H80xW80xL1700	46	4600						
	LP8080-L-1800	H80xW80xL1800	49	4900						
	LP8080-L-1900	H80xW80xL1900	51	5100						
	LP8080-L-2000	H80xW80xL2000	54	5400						
	LP8080-L-2100	H80xW80xL2100	57	5700						
	LP8080-L-2200	H80xW80xL2200	59	5900						
	LP8080-L-2300	H80xW80xL2300	62	6200						
	LP8080-L-2400	H80xW80xL2400	65	6500						

Ordering code for Linear series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LPXX80	LP6080-L-500	H80xW60xL500	9	900	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LP6080-L-600	H80xW60xL600	10	1000						
	LP6080-L-700	H80xW60xL700	12	1200						
	LP6080-L-800	H80xW60xL800	14	1400						
	LP6080-L-900	H80xW60xL900	16	1600						
	LP6080-L-1000	H80xW60xL1000	17	1700						
	LP6080-L-1100	H80xW60xL1100	19	1900						
	LP6080-L-1200	H80xW60xL1200	21	2100						
	LP6080-L-1300	H80xW60xL1300	23	2300						
	LP6080-L-1400	H80xW60xL1400	25	2500						
	LP6080-L-1500	H80xW60xL1500	26	2600						
	LP6080-L-1600	H80xW60xL1600	28	2800						
	LP6080-L-1700	H80xW60xL1700	30	3000						
	LP6080-L-1800	H80xW60xL1800	31	3100						
	LP6080-L-1900	H80xW60xL1900	33	3300						
	LP6080-L-2000	H80xW60xL2000	35	3500						
	LP6080-L-2100	H80xW60xL2100	37	3700						
	LP6080-L-2200	H80xW60xL2200	39	3900						
	LP6080-L-2300	H80xW60xL2300	40	4000						
	LP6080-L-2400	H80xW60xL2400	42	4200						
	LP6080-L-500-U	H80xW60xL500	9+3	1200						
	LP6080-L-600-U	H80xW60xL600	10+3	1300						
	LP6080-L-700-U	H80xW60xL700	12+4	1600						
	LP6080-L-800-U	H80xW60xL800	14+4	1800						
LP6080-L-900-U	H80xW60xL900	16+5	2100							
LP6080-L-1000-U	H80xW60xL1000	17+6	2300							
LP6080-L-1100-U	H80xW60xL1100	19+6	2500							
LP6080-L-1200-U	H80xW60xL1200	21+7	2800							
LP6080-L-1300-U	H80xW60xL1300	23+7	3000							
LP6080-L-1400-U	H80xW60xL1400	25+8	3300							
LP6080-L-1500-U	H80xW60xL1500	26+8	3400							
LP6080-L-1600-U	H80xW60xL1600	28+9	3700							
LP6080-L-1700-U	H80xW60xL1700	30+10	4000							
LP6080-L-1800-U	H80xW60xL1800	31+10	4100							
LP6080-L-1900-U	H80xW60xL1900	33+11	4400							
LP6080-L-2000-U	H80xW60xL2000	35+12	4700							
LP6080-L-2100-U	H80xW60xL2100	37+12	4900							
LP6080-L-2200-U	H80xW60xL2200	39+13	5200							
LP6080-L-2300-U	H80xW60xL2300	40+13	5300							
LP6080-L-2400-U	H80xW60xL2400	42+14	5600							

Ordering code for Linear series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LRXX35	LR6035-L-500	H35xW60xL500	4	400	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LR6035-L-600	H35xW60xL600	4.5	450						
	LR6035-L-700	H35xW60xL700	5	500						
	LR6035-L-800	H35xW60xL800	6	600						
	LR6035-L-900	H35xW60xL900	7	700						
	LR6035-L-1000	H35xW60xL1000	7.5	750						
	LR6035-L-1100	H35xW60xL1100	8	800						
	LR6035-L-1200	H35xW60xL1200	9	900						
	LR6035-L-1300	H35xW60xL1300	10	1000						
	LR6035-L-1400	H35xW60xL1400	10.5	1050						
	LR6035-L-1500	H35xW60xL1500	11.5	1150						
	LR6035-L-1600	H35xW60xL1600	12.5	1250						
	LR6035-L-1700	H35xW60xL1700	13	1300						
	LR6035-L-1800	H35xW60xL1800	14	1400						
	LR6035-L-1900	H35xW60xL1900	15	1500						
	LR6035-L-2000	H35xW60xL2000	15.5	1550						
	LR6035-L-2100	H35xW60xL2100	16	1600						
	LR6035-L-2200	H35xW60xL2200	17	1700						
	LR6035-L-2300	H35xW60xL2300	18	1800						
	LR6035-L-2400	H35xW60xL2400	19	1900						
	LR8035-L-500	H35xW80xL500	9	900						
	LR8035-L-600	H35xW80xL600	10	1000						
	LR8035-L-700	H35xW80xL700	12	1200						
	LR8035-L-800	H35xW80xL800	14	1400						
	LR8035-L-900	H35xW80xL900	16	1600						
	LR8035-L-1000	H35xW80xL1000	17	1700						
	LR8035-L-1100	H35xW80xL1100	19	1900						
	LR8035-L-1200	H35xW80xL1200	21	2100						
	LR8035-L-1300	H35xW80xL1300	23	2300						
	LR8035-L-1400	H35xW80xL1400	25	2500						
	LR8035-L-1500	H35xW80xL1500	26	2600						
	LR8035-L-1600	H35xW80xL1600	28	2800						
LR8035-L-1700	H35xW80xL1700	30	3000							
LR8035-L-1800	H35xW80xL1800	31	3100							
LR8035-L-1900	H35xW80xL1900	33	3300							
LR8035-L-2000	H35xW80xL2000	35	3500							
LR8035-L-2100	H35xW80xL2100	37	3700							
LR8035-L-2200	H35xW80xL2200	39	3900							
LR8035-L-2300	H35xW80xL2300	40	4000							
LR8035-L-2400	H35xW80xL2400	42	4200							

Ordering code for Linear series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LRXX75	LR6075-L-500	H75xW60xL500	4	400	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LR6075-L-600	H75xW60xL600	4.5	450						
	LR6075-L-700	H75xW60xL700	5	500						
	LR6075-L-800	H75xW60xL800	6	600						
	LR6075-L-900	H75xW60xL900	7	700						
	LR6075-L-1000	H75xW60xL1000	7.5	750						
	LR6075-L-1100	H75xW60xL1100	8	800						
	LR6075-L-1200	H75xW60xL1200	9	900						
	LR6075-L-1300	H75xW60xL1300	10	1000						
	LR6075-L-1400	H75xW60xL1400	10.5	1050						
	LR6075-L-1500	H75xW60xL1500	11.5	1150						
	LR6075-L-1600	H75xW60xL1600	12.5	1250						
	LR6075-L-1700	H75xW60xL1700	13	1300						
	LR6075-L-1800	H75xW60xL1800	14	1400						
	LR6075-L-1900	H75xW60xL1900	15	1500						
	LR6075-L-2000	H75xW60xL2000	15.5	1550						
	LR6075-L-2100	H75xW60xL2100	16	1600						
	LR6075-L-2200	H75xW60xL2200	17	1700						
	LR6075-L-2300	H75xW60xL2300	18	1800						
	LR6075-L-2400	H75xW60xL2400	19	1900						
	LR8075-L-500	H75xW80xL500	9	900						
	LR8075-L-600	H75xW80xL600	10	1000						
	LR8075-L-700	H75xW80xL700	12	1200						
	LR8075-L-800	H75xW80xL800	14	1400						
	LR8075-L-900	H75xW80xL900	16	1600						
	LR8075-L-1000	H75xW80xL1000	17	1700						
	LR8075-L-1100	H75xW80xL1100	19	1900						
	LR8075-L-1200	H75xW80xL1200	21	2100						
	LR8075-L-1300	H75xW80xL1300	23	2300						
	LR8075-L-1400	H75xW80xL1400	25	2500						
	LR8075-L-1500	H75xW80xL1500	26	2600						
	LR8075-L-1600	H75xW80xL1600	28	2800						
LR8075-L-1700	H75xW80xL1700	30	3000							
LR8075-L-1800	H75xW80xL1800	31	3100							
LR8075-L-1900	H75xW80xL1900	33	3300							
LR8075-L-2000	H75xW80xL2000	35	3500							
LR8075-L-2100	H75xW80xL2100	37	3700							
LR8075-L-2200	H75xW80xL2200	39	3900							
LR8075-L-2300	H75xW80xL2300	40	4000							
LR8075-L-2400	H75xW80xL2400	42	4200							

Ordering code for Linear series-Pendant corners

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60 LPXX60	P/CN4060-L-90	H60xW200xL200	3	300	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	P/CN5060-L-90	H60xW200xL200	3	300						
	P/CN6060-L-90	H60xW200xL200	7	700						
	P/CN8060-L-90	H60xW200xL200	10	1000						
	P/CN4060-LO-90	H60xW200xL200	3	300						
	P/CN5060-LO-90	H60xW200xL200	3	300						
	P/CN6060-LO-90	H60xW200xL200	7	700						
	P/CN8060-LO-90	H60xW200xL200	10	1000						
	P/CN4060-LI-90	H60xW200xL200	3	300						
	P/CN5060-LI-90	H60xW200xL200	3	300						
	P/CN6060-LI-90	H60xW200xL200	7	700						
	P/CN8060-LI-90	H60xW200xL200	10	1000						
	P/CN4060-T	H60xW200xL400	4	400						
	P/CN5060-T	H60xW200xL400	4	400						
	P/CN6060-T	H60xW200xL400	10	1000						
	P/CN8060-T	H60xW200xL400	16	1600						
	P/CN4060-X	H60xW400xL400	6	600						
	P/CN5060-X	H60xW400xL400	6	600						
P/CN6060-X	H60xW400xL400	14	1400							
P/CN8060-X	H60xW400xL400	21	2100							
LCXX80 LPXX80	P/CN4080-L-90	H80xW200xL200	3	300	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	P/CN5080-L-90	H80xW200xL200	3	300						
	P/CN6080-L-90	H80xW200xL200	7	700						
	P/CN8080-L-90	H80xW200xL200	10	1000						
	P/CN4080-LO-90	H80xW200xL200	3	300						
	P/CN5080-LO-90	H80xW200xL200	3	300						
	P/CN6080-LO-90	H80xW200xL200	7	700						
	P/CN8080-LO-90	H80xW200xL200	10	1000						
	P/CN4080-LI-90	H80xW200xL200	3	300						
	P/CN5080-LI-90	H80xW200xL200	3	300						
	P/CN6080-LI-90	H80xW200xL200	7	700						
	P/CN8080-LI-90	H80xW200xL200	10	1000						
	P/CN4080-T	H80xW200xL400	4	400						
	P/CN5080-T	H80xW200xL400	4	400						
	P/CN6080-T	H80xW200xL400	10	1000						
	P/CN8080-T	H80xW200xL400	16	1600						
	P/CN4080-X	H80xW400xL400	6	600						
	P/CN5080-X	H80xW400xL400	6	600						
P/CN6080-X	H80xW400xL400	14	1400							
P/CN8080-X	H80xW400xL400	21	2100							

Ordering code for Linear series-Recessed corners

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LRXX35	RN6035-L-90	H35xW200xL200	3	300	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	RN7035-L-90	H35xW200xL200	3	300						
	RN8035-L-90	H35xW200xL200	7	700						
	RN10035-L-90	H35xW200xL200	10	1000						
	RN6035-LO-90	H35xW200xL200	3	300						
	RN7035-LO-90	H35xW200xL200	3	300						
	RN8035-LO-90	H35xW200xL200	7	700						
	RN10035-LO-90	H35xW200xL200	10	1000						
	RN6035-LI-90	H35xW200xL200	3	300						
	RN7035-LI-90	H35xW200xL200	3	300						
	RN8035-LI-90	H35xW200xL200	7	700						
	RN10035-LI-90	H35xW200xL200	10	1000						
	RN6035-T	H35xW200xL400	4	400						
	RN7035-T	H35xW200xL400	4	400						
	RN8035-T	H35xW200xL400	10	1000						
	RN10035-T	H35xW200xL400	16	1600						
	RN6035-X	H35xW400xL400	6	600						
	RN7035-X	H35xW400xL400	6	600						
RN8035-X	H35xW400xL400	14	1400							
RN10035-X	H35xW400xL400	21	2100							
LRXX75	RN6075-L-90	H75xW200xL200	3	300	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	RN7075-L-90	H75xW200xL200	3	300						
	RN8075-L-90	H75xW200xL200	7	700						
	RN10075-L-90	H75xW200xL200	10	1000						
	RN6075-LO-90	H75xW200xL200	3	300						
	RN7075-LO-90	H75xW200xL200	3	300						
	RN8075-LO-90	H75xW200xL200	7	700						
	RN10075-LO-90	H75xW200xL200	10	1000						
	RN6075-LI-90	H75xW200xL200	3	300						
	RN7075-LI-90	H75xW200xL200	3	300						
	RN8075-LI-90	H75xW200xL200	7	700						
	RN10075-LI-90	H75xW200xL200	10	1000						
	RN6075-T	H75xW200xL400	4	400						
	RN7075-T	H75xW200xL400	4	400						
	RN8075-T	H75xW200xL400	10	1000						
	RN10075-T	H75xW200xL400	16	1600						
	RN6075-X	H75xW400xL400	6	600						
	RN7075-X	H75xW400xL400	6	600						
RN8075-X	H75xW400xL400	14	1400							
RN10075-X	H75xW400xL400	21	2100							


# IP65 series



## Sections

NEW DESIGN

With waterproof end cap & cover

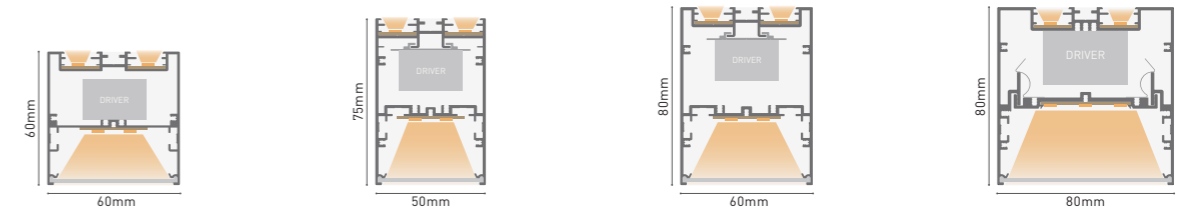


## Ordering code for IP65 series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LPXX60	LP6060-L-600-IP65	H60xW60xL600	10	1000	Non Dali Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS IP65
	LP6060-L-900-IP65	H60xW60xL900	16	1600						
	LP6060-L-1000-IP65	H60xW60xL1000	17	1700						
	LP6060-L-1200-IP65	H60xW60xL1200	21	2100						
	LP6060-L-1500-IP65	H60xW60xL1500	26	2600						
	LP6060-L-1800-IP65	H60xW60xL1800	31	3100						
	LP6060-L-2000-IP65	H60xW60xL2000	35	3500						
	LP6060-L-2400-IP65	H60xW60xL2400	42	4200						
LPXX75	LP5075-L-600-IP65	H50xW75xL600	10	1000						
	LP5075-L-900-IP65	H50xW75xL900	16	1600						
	LP5075-L-1000-IP65	H50xW75xL1000	17	1700						
	LP5075-L-1200-IP65	H50xW75xL1200	21	2100						
	LP5075-L-1500-IP65	H50xW75xL1500	26	2600						
	LP5075-L-1800-IP65	H50xW75xL1800	31	3100						
	LP5075-L-2000-IP65	H50xW75xL2000	35	3500						
	LP5075-L-2400-IP65	H50xW75xL2400	42	4200						
LPXX80	LP6080-L-600-IP65	H60xW80xL600	10	1000						
	LP6080-L-900-IP65	H60xW80xL900	16	1600						
	LP6080-L-1000-IP65	H60xW80xL1000	17	1700						
	LP6080-L-1200-IP65	H60xW80xL1200	21	2100						
	LP6080-L-1500-IP65	H60xW80xL1500	26	2600						
	LP6080-L-1800-IP65	H60xW80xL1800	31	3100						
	LP6080-L-2000-IP65	H60xW80xL2000	35	3500						
	LP6080-L-2400-IP65	H60xW80xL2400	42	4200						
	LP8080-L-600-IP65	H80xW80xL600	16	1600						
	LP8080-L-900-IP65	H80xW80xL900	24	2400						
	LP8080-L-1000-IP65	H80xW80xL1000	27	2700						
	LP8080-L-1200-IP65	H80xW80xL1200	32	3200						
	LP8080-L-1500-IP65	H80xW80xL1500	41	4100						
	LP8080-L-1800-IP65	H80xW80xL1800	49	4900						
	LP8080-L-2000-IP65	H80xW80xL2000	54	5400						
	LP8080-L-2400-IP65	H80xW80xL2400	62	6200						

Up&down series

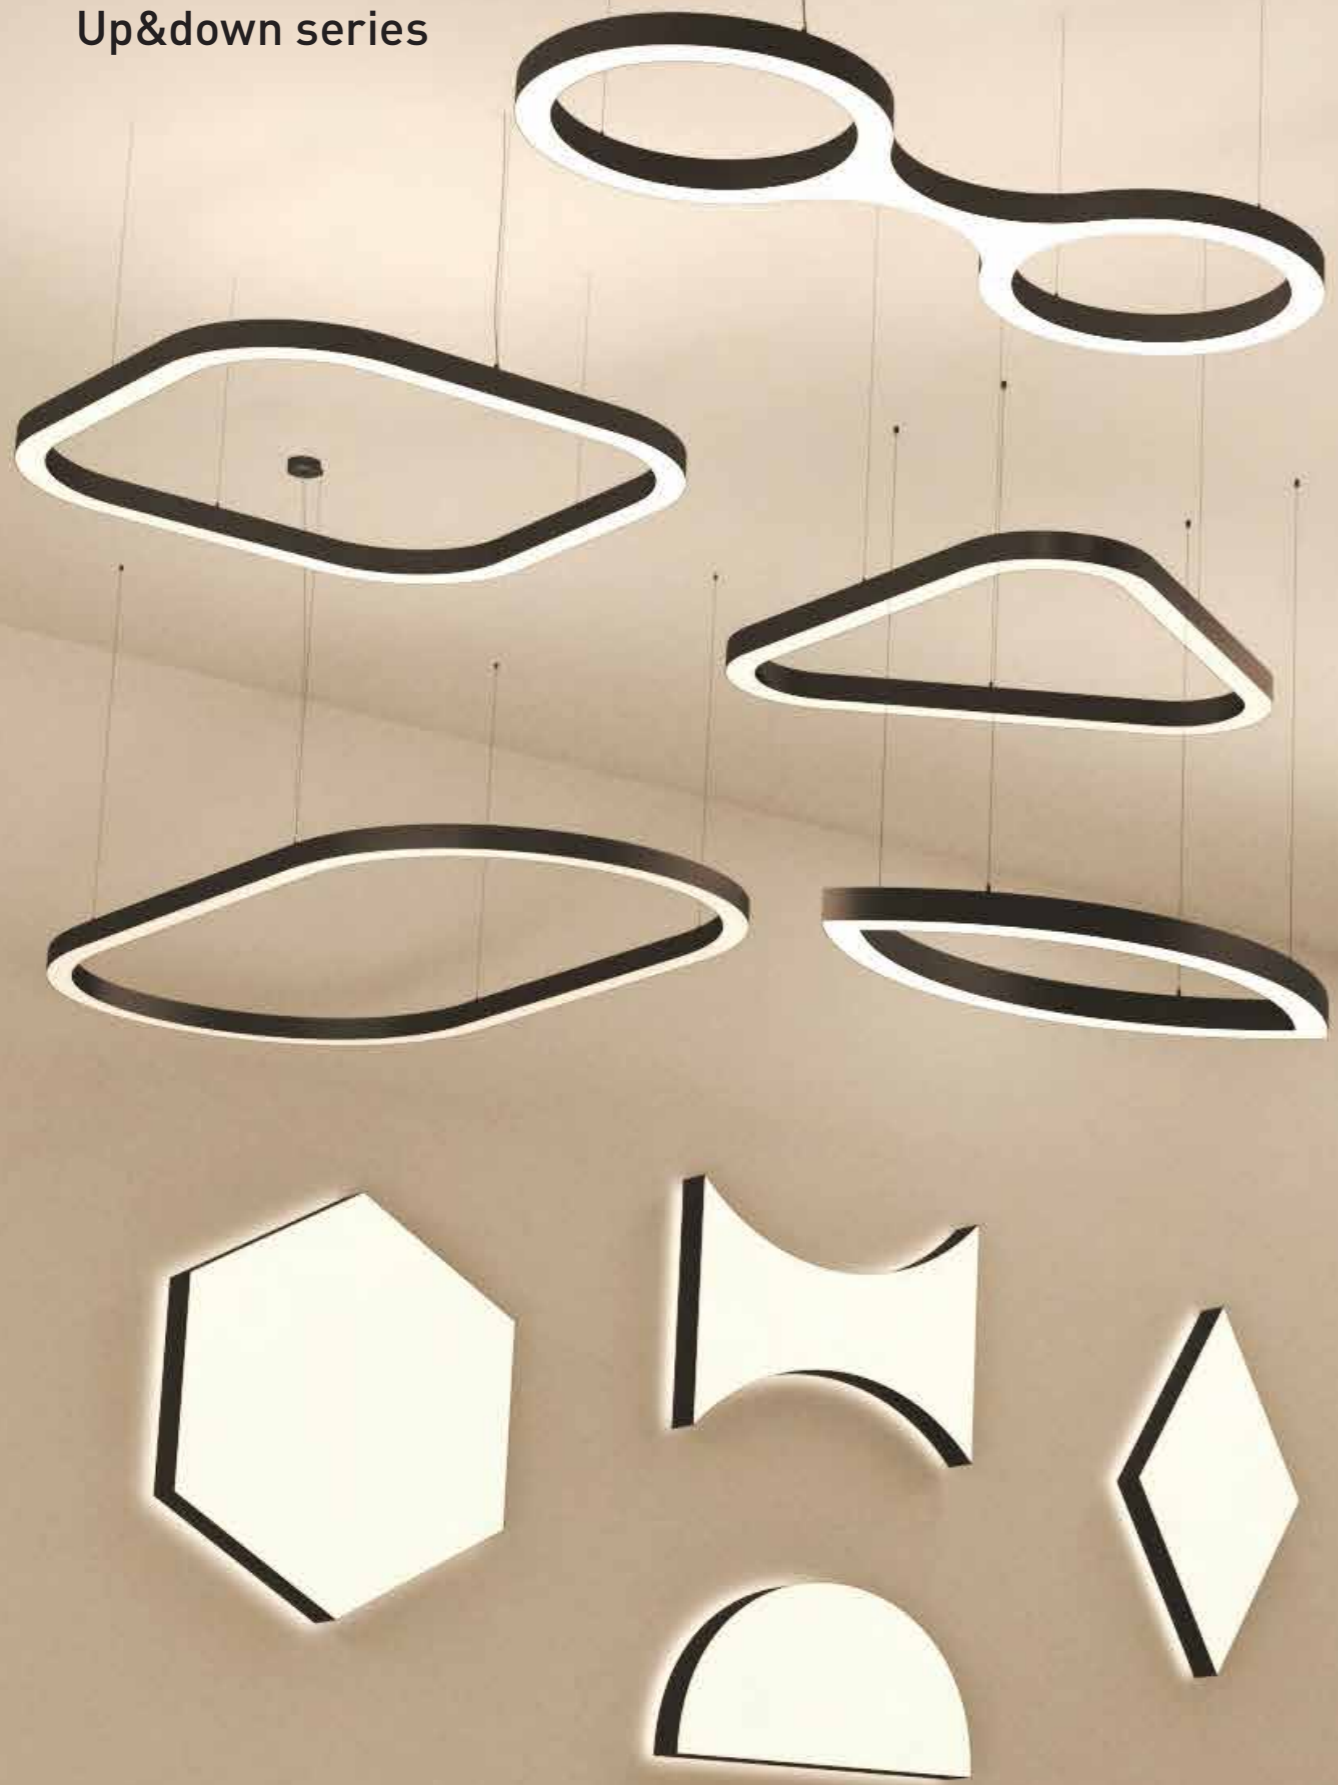

Ordering code for Up&down-Circle series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC4060-C-450-U	H60xD450	10+10	2000	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4060-C-600-U	H60xD600	15+15	3000						
	LC4060-C-740-U	H60xD740	20+20	4000						
	LC4060-C-900-U	H60xD900	25+25	5000						
	LC4060-C-1000-U	H60xD1000	30+30	6000						
	LC4060-C-1200-U	H60xD1200	35+35	7000						
	LC4060-C-1540-U	H60xD1540	40+40	8000						
	LC4060-C-1840-U	H60xD1840	55+55	11000						
	LC4060-C-2040-U	H60xD2040	60+60	12000						
	LC4060-C-2440-U	H60xD2440	75+75	15000						
	LC4060-C-3040-U	H60xD3040	90+90	18000						
	LC4060-C-4040-U	H60xD4040	120+120	24000						
	LC4060-C-5040-U	H60xD5040	160+160	32000						
	LC4060-C-6040-U	H60xD6040	180+180	36000						
	LC4060-C-7040-U	H60xD7040	240+240	48000						
	LC6060-C-450-U	H60xD450	20+10	3000						
	LC6060-C-660-U	H60xD660	30+15	4500						
	LC6060-C-900-U	H60xD900	40+20	6000						
	LC6060-C-1060-U	H60xD1060	50+25	7500						
	LC6060-C-1200-U	H60xD1200	60+30	9000						
	LC6060-C-1560-U	H60xD1560	80+40	12000						
	LC6060-C-1860-U	H60xD1860	110+55	16500						
	LC6060-C-2060-U	H60xD2060	120+60	18000						
	LC6060-C-2460-U	H60xD2460	150+75	22500						
	LC6060-C-3060-U	H60xD3060	180+90	27000						
	LC6060-C-4060-U	H60xD4060	240+120	36000						
	LC6060-C-5060-U	H60xD5060	320+160	48000						
	LC6060-C-6060-U	H60xD6060	360+180	54000						
	LC6060-C-7060-U	H60xD7060	480+240	72000						
	LC8060-C-680-U	H60xD680	30+15	4500						
	LC8060-C-900-U	H60xD900	50+25	7500						
	LC8060-C-1200-U	H60xD1200	80+40	12000						
	LC8060-C-1580-U	H60xD1580	120+60	18000						
	LC8060-C-1880-U	H60xD1880	160+80	24000						
	LC8060-C-2080-U	H60xD2080	180+90	27000						
	LC8060-C-2480-U	H60xD2480	225+110	33500						
	LC8060-C-3080-U	H60xD3080	270+135	40500						
	LC8060-C-4080-U	H60xD4080	360+180	54000						
	LC8060-C-5080-U	H60xD5080	480+240	72000						
	LC8060-C-6080-U	H60xD6080	540+270	81000						
LC8060-C-7080-U	H60xD7080	720+360	108000							

Ordering code for Up&down-Circle series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LC4080-C-450-U	H80xD450	10+10	2000	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4080-C-600-U	H80xD600	15+15	3000						
	LC4080-C-740-U	H80xD740	20+20	4000						
	LC4080-C-900-U	H80xD900	25+25	5000						
	LC4080-C-1000-U	H80xD1000	30+30	6000						
	LC4080-C-1200-U	H80xD1200	35+35	7000						
	LC4080-C-1540-U	H80xD1540	40+40	8000						
	LC4080-C-1840-U	H80xD1840	55+55	11000						
	LC4080-C-2040-U	H80xD2040	60+60	12000						
	LC4080-C-2440-U	H80xD2440	75+75	15000						
	LC4080-C-3040-U	H80xD3040	90+90	18000						
	LC4080-C-4040-U	H80xD4040	120+120	24000						
	LC4080-C-5040-U	H80xD5040	160+160	32000						
	LC4080-C-6040-U	H80xD6040	180+180	36000						
	LC4080-C-7040-U	H80xD7040	240+240	48000						
	LC6080-C-450-U	H80xD450	20+10	3000						
	LC6080-C-660-U	H80xD660	30+15	4500						
	LC6080-C-900-U	H80xD900	40+20	6000						
	LC6080-C-1060-U	H80xD1060	50+25	7500						
	LC6080-C-1200-U	H80xD1200	60+30	9000						
	LC6080-C-1560-U	H80xD1560	80+40	12000						
	LC6080-C-1860-U	H80xD1860	110+55	16500						
	LC6080-C-2060-U	H80xD2060	120+60	18000						
	LC6080-C-2460-U	H80xD2460	150+75	22500						
	LC6080-C-3060-U	H80xD3060	180+90	27000						
	LC6080-C-4060-U	H80xD4060	240+120	36000						
	LC6080-C-5060-U	H80xD5060	320+160	48000						
	LC6080-C-6060-U	H80xD6060	360+180	54000						
	LC6080-C-7060-U	H80xD7060	480+240	72000						
	LC8080-C-680-U	H80xD680	30+15	4500						
	LC8080-C-900-U	H80xD900	50+25	7500						
	LC8080-C-1200-U	H80xD1200	80+40	12000						
	LC8080-C-1580-U	H80xD1580	120+60	18000						
	LC8080-C-1880-U	H80xD1880	160+80	24000						
	LC8080-C-2080-U	H80xD2080	180+90	27000						
	LC8080-C-2480-U	H80xD2480	225+110	33500						
	LC8080-C-3080-U	H80xD3080	270+135	40500						
	LC8080-C-4080-U	H80xD4080	360+180	54000						
	LC8080-C-5080-U	H80xD5080	480+240	72000						
	LC8080-C-6080-U	H80xD6080	540+270	81000						
LC8080-C-7080-U	H80xD7080	720+360	108000							

Ordering code for Up&down-S series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC4060-S-610-U	H60xW118xL610	5+5	1000	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4060-S-820-U	H60xW148xL820	7.5+7.5	1500						
	LC4060-S-1250-U	H60xW270xL1250	13+13	2600						
	LC4060-S-1525-U	H60xW324xL1525	17+17	3400						
	LC4060-S-1700-U	H60xW358xL1700	20+20	4000						
	LC4060-S-2045-U	H60xW426xL2045	23+23	4600						
	LC4060-S-2150-U	H60xW336xL2150	20+20	4000						
	LC4060-S-2575-U	H60xW396xL2575	28+28	5600						
	LC4060-S-2860-U	H60xW436xL2860	30+30	6000						
	LC4060-S-3425-U	H60xW516xL3425	38+38	7600						
	LC4060-S-5235-U	H60xW1052xL5235	60+60	12000						
	LC4060-S-5685-U	H60xW836xL5685	60+60	12000						
	LC4060-S-7100-U	H60xW1036xL7100	80+80	16000						
	LC4060-S-8515-U	H60xW1236xL8515	90+90	18000						
	LC4060-S-9930-U	H60xW1436xL9930	120+120	24000						
	LC6060-S-600-U	H60xW131xL600	10+5	1500						
	LC6060-S-895-U	H60xW173xL895	15+7	2200						
	LC6060-S-1510-U	H60xW333xL1510	27+13	4000						
	LC6060-S-1785-U	H60xW388xL1785	34+17	5100						
	LC6060-S-2030-U	H60xW435xL2030	40+20	6000						
	LC6060-S-2165-U	H60xW353xL2165	40+20	6000						
	LC6060-S-2590-U	H60xW413xL2590	55+27	8200						
	LC6060-S-2875-U	H60xW453xL2875	60+30	9000						
	LC6060-S-3440-U	H60xW533xL3440	75+37	11200						
	LC6060-S-5250-U	H60xW1067xL5250	120+60	18000						
	LC6060-S-5700-U	H60xW853xL5700	120+60	18000						
	LC6060-S-7115-U	H60xW1053xL7115	160+80	24000						
	LC6060-S-8530-U	H60xW1253xL8530	180+90	27000						
	LC6060-S-9945-U	H60xW1453xL9945	240+120	36000						
	LC8060-S-910-U	H60xW190xL910	15+7	2200						
	LC8060-S-1495-U	H60xW342xL1495	34+17	5100						
	LC8060-S-2010-U	H60xW444xL2010	54+27	8100						
	LC8060-S-2180-U	H60xW371xL2180	60+30	9000						
	LC8060-S-2605-U	H60xW431xL2605	80+40	12000						
	LC8060-S-2890-U	H60xW471xL2890	90+45	13500						
	LC8060-S-3455-U	H60xW551xL3455	112+56	16800						
	LC8060-S-5270-U	H60xW1083xL5270	180+90	27000						
	LC8060-S-5715-U	H60xW871xL5715	180+90	27000						
	LC8060-S-7130-U	H60xW1071xL7130	240+120	36000						
	LC8060-S-8545-U	H60xW1271xL8545	270+135	40500						
LC8060-S-9960-U	H60xW1471xL9960	360+180	54000							

Ordering code for Up&down-S series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LC4080-S-610-U	H80xW118xL610	5+5	1000	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4080-S-820-U	H80xW148xL820	7.5+7.5	1500						
	LC4080-S-1250-U	H80xW270xL1250	13+13	2600						
	LC4080-S-1525-U	H80xW324xL1525	17+17	3400						
	LC4080-S-1700-U	H80xW358xL1700	20+20	4000						
	LC4080-S-2045-U	H80xW426xL2045	23+23	4600						
	LC4080-S-2150-U	H80xW336xL2150	20+20	4000						
	LC4080-S-2575-U	H80xW396xL2575	28+28	5600						
	LC4080-S-2860-U	H80xW436xL2860	30+30	6000						
	LC4080-S-3425-U	H80xW516xL3425	38+38	7600						
	LC4080-S-5235-U	H80xW1052xL5235	60+60	12000						
	LC4080-S-5685-U	H80xW836xL5685	60+60	12000						
	LC4080-S-7100-U	H80xW1036xL7100	80+80	16000						
	LC4080-S-8515-U	H80xW1236xL8515	90+90	18000						
	LC4080-S-9930-U	H80xW1436xL9930	120+120	24000						
	LC6080-S-600-U	H80xW131xL600	10+5	1500						
	LC6080-S-895-U	H80xW173xL895	15+7	2200						
	LC6080-S-1510-U	H80xW333xL1510	27+13	4000						
	LC6080-S-1785-U	H80xW388xL1785	34+17	5100						
	LC6080-S-2030-U	H80xW435xL2030	40+20	6000						
	LC6080-S-2165-U	H80xW353xL2165	40+20	6000						
	LC6080-S-2590-U	H80xW413xL2590	55+27	8200						
	LC6080-S-2875-U	H80xW453xL2875	60+30	9000						
	LC6080-S-3440-U	H80xW533xL3440	75+37	11200						
	LC6080-S-5250-U	H80xW1067xL5250	120+60	18000						
	LC6080-S-5700-U	H80xW853xL5700	120+60	18000						
	LC6080-S-7115-U	H80xW1053xL7115	160+80	24000						
	LC6080-S-8530-U	H80xW1253xL8530	180+90	27000						
	LC6080-S-9945-U	H80xW1453xL9945	240+120	36000						
	LC8080-S-910-U	H80xW190xL910	15+7	2200						
	LC8080-S-1495-U	H80xW342xL1495	34+17	5100						
	LC8080-S-2010-U	H80xW444xL2010	54+27	8100						
	LC8080-S-2180-U	H80xW371xL2180	60+30	9000						
	LC8080-S-2605-U	H80xW431xL2605	80+40	12000						
	LC8080-S-2890-U	H80xW471xL2890	90+45	13500						
	LC8080-S-3455-U	H80xW551xL3455	112+56	16800						
	LC8080-S-5270-U	H80xW1083xL5270	180+90	27000						
	LC8080-S-5715-U	H80xW871xL5715	180+90	27000						
	LC8080-S-7130-U	H80xW1071xL7130	240+120	36000						
	LC8080-S-8545-U	H80xW1271xL8545	270+135	40500						
LC8080-S-9960-U	H80xW1471xL9960	360+180	54000							

Ordering code for Up&down-Faith series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC4060-F-450-U	H60xW450xL425	9+9	1800	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4060-F-600-U	H60xW600xL500	11+11	2200						
	LC4060-F-740-U	H60xW740xL570	14+14	2800						
	LC4060-F-900-U	H60xW900xL650	16+16	3200						
	LC4060-F-1000-U	H60xW1000xL700	19+19	3800						
	LC4060-F-1200-U	H60xW1200xL800	21+21	4200						
	LC4060-F-1540-U	H60xW1540xL770	20+20	4000						
	LC4060-F-1840-U	H60xW1840xL920	27+27	5400						
	LC4060-F-2040-U	H60xW2040xL1020	30+30	6000						
	LC4060-F-2440-U	H60xW2440xL1220	37+37	7400						
	LC4060-F-3040-U	H60xW3040xL1520	45+45	9000						
	LC4060-F-4040-U	H60xW4040xL2020	60+60	12000						
	LC4060-F-5040-U	H60xW5040xL2520	80+80	16000						
	LC4060-F-6040-U	H60xW6040xL3020	90+90	18000						
	LC4060-F-7040-U	H60xW7040xL3520	120+120	24000						
	LC6060-F-450-U	H60xW450xL425	20+10	3000						
	LC6060-F-660-U	H60xW660xL530	25+12	3700						
	LC6060-F-900-U	H60xW900xL650	30+15	4500						
	LC6060-F-1060-U	H60xW1060xL730	35+17	5200						
	LC6060-F-1200-U	H60xW1200xL800	40+20	6000						
	LC6060-F-1560-U	H60xW1560xL780	40+20	6000						
	LC6060-F-1860-U	H60xW1860xL930	55+27	8200						
	LC6060-F-2060-U	H60xW2060xL1030	60+30	9000						
	LC6060-F-2460-U	H60xW2460xL1230	75+37	11200						
	LC6060-F-3060-U	H60xW3060xL1530	90+45	13500						
	LC6060-F-4060-U	H60xW4060xL2030	120+60	18000						
	LC6060-F-5060-U	H60xW5060xL2530	160+80	24000						
	LC6060-F-6060-U	H60xW6060xL3030	180+90	27000						
	LC6060-F-7060-U	H60xW7060xL3530	240+120	36000						
	LC8060-F-680-U	H60xW680xL540	30+15	4500						
	LC8060-F-900-U	H60xW900xL650	40+20	6000						
	LC8060-F-1200-U	H60xW1200xL800	55+27	8200						
	LC8060-F-1580-U	H60xW1580xL790	60+30	9000						
	LC8060-F-1880-U	H60xW1880xL940	80+40	12000						
	LC8060-F-2080-U	H60xW2080xL1040	90+45	13500						
	LC8060-F-2480-U	H60xW2480xL1240	110+55	16500						
	LC8060-F-3080-U	H60xW3080xL1540	135+67	20200						
	LC8060-F-4080-U	H60xW4080xL2040	180+90	27000						
	LC8060-F-5080-U	H60xW5080xL2540	240+120	36000						
	LC8060-F-6080-U	H60xW6080xL3040	270+135	40500						
LC8060-F-7080-U	H60xW7080xL3540	360+180	54000							

Ordering code for Up&down-Faith series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LC4080-F-450-U	H80xW450xL425	9+9	1800	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4080-F-600-U	H80xW600xL500	11+11	2200						
	LC4080-F-740-U	H80xW740xL570	14+14	2800						
	LC4080-F-900-U	H80xW900xL650	16+16	3200						
	LC4080-F-1000-U	H80xW1000xL700	19+19	3800						
	LC4080-F-1200-U	H80xW1200xL800	21+21	4200						
	LC4080-F-1540-U	H80xW1540xL770	20+20	4000						
	LC4080-F-1840-U	H80xW1840xL920	27+27	5400						
	LC4080-F-2040-U	H80xW2040xL1020	30+30	6000						
	LC4080-F-2440-U	H80xW2440xL1220	37+37	7400						
	LC4080-F-3040-U	H80xW3040xL1520	45+45	9000						
	LC4080-F-4040-U	H80xW4040xL2020	60+60	12000						
	LC4080-F-5040-U	H80xW5040xL2520	80+80	16000						
	LC4080-F-6040-U	H80xW6040xL3020	90+90	18000						
	LC4080-F-7040-U	H80xW7040xL3520	120+120	24000						
	LC6080-F-450-U	H80xW450xL425	20+10	3000						
	LC6080-F-660-U	H80xW660xL530	25+12	3700						
	LC6080-F-900-U	H80xW900xL650	30+15	4500						
	LC6080-F-1060-U	H80xW1060xL730	35+17	5200						
	LC6080-F-1200-U	H80xW1200xL800	40+20	6000						
	LC6080-F-1560-U	H80xW1560xL780	40+20	6000						
	LC6080-F-1860-U	H80xW1860xL930	55+27	8200						
	LC6080-F-2060-U	H80xW2060xL1030	60+30	9000						
	LC6080-F-2460-U	H80xW2460xL1230	75+37	11200						
	LC6080-F-3060-U	H80xW3060xL1530	90+45	13500						
	LC6080-F-4060-U	H80xW4060xL2030	120+60	18000						
	LC6080-F-5060-U	H80xW5060xL2530	160+80	24000						
	LC6080-F-6060-U	H80xW6060xL3030	180+90	27000						
	LC6080-F-7060-U	H80xW7060xL3530	240+120	36000						
	LC8080-F-680-U	H80xW680xL540	30+15	4500						
	LC8080-F-900-U	H80xW900xL650	40+20	6000						
	LC8080-F-1200-U	H80xW1200xL800	55+27	8200						
	LC8080-F-1580-U	H80xW1580xL790	60+30	9000						
	LC8080-F-1880-U	H80xW1880xL940	80+40	12000						
	LC8080-F-2080-U	H80xW2080xL1040	90+45	13500						
	LC8080-F-2480-U	H80xW2480xL1240	110+55	16500						
	LC8080-F-3080-U	H80xW3080xL1540	135+67	20200						
	LC8080-F-4080-U	H80xW4080xL2040	180+90	27000						
	LC8080-F-5080-U	H80xW5080xL2540	240+120	36000						
	LC8080-F-6080-U	H80xW6080xL3040	270+135	40500						
LC8080-F-7080-U	H80xW7080xL3540	360+180	54000							

Ordering code for Up&down-Line parts

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC4060-L-500-U	H60xW40xL500	4+4	800	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4060-L-600-U	H60xW40xL600	4.5+4.5	900						
	LC4060-L-700-U	H60xW40xL700	5+5	1000						
	LC4060-L-800-U	H60xW40xL800	6+6	1200						
	LC4060-L-900-U	H60xW40xL900	7+7	1400						
	LC4060-L-1000-U	H60xW40xL1000	7.5+7.5	1500						
	LC4060-L-1100-U	H60xW40xL1100	8+8	1600						
	LC4060-L-1200-U	H60xW40xL1200	9+9	1800						
	LC4060-L-1300-U	H60xW40xL1300	10+10	2000						
	LC4060-L-1400-U	H60xW40xL1400	10.5+10.5	2100						
	LC4060-L-1500-U	H60xW40xL1500	11.5+11.5	1150						
	LC4060-L-1600-U	H60xW40xL1600	12.5+12.5	2500						
	LC4060-L-1700-U	H60xW40xL1700	13+13	2600						
	LC4060-L-1800-U	H60xW40xL1800	14+14	2800						
	LC4060-L-1900-U	H60xW40xL1900	15+15	3000						
	LC4060-L-2000-U	H60xW40xL2000	15.5+15.5	3100						
	LC4060-L-2100-U	H60xW40xL2100	16+16	3200						
	LC4060-L-2200-U	H60xW40xL2200	17+17	3400						
	LC4060-L-2300-U	H60xW40xL2300	18+18	3600						
	LC4060-L-2400-U	H60xW40xL2400	19+19	3800						
	LC5060-L-500-U	H60xW50xL500	4+4	800						
	LC5060-L-600-U	H60xW50xL600	4.5+4.5	900						
	LC5060-L-700-U	H60xW50xL700	5+5	1000						
	LC5060-L-800-U	H60xW50xL800	6+6	1200						
	LC5060-L-900-U	H60xW50xL900	7+7	1400						
	LC5060-L-1000-U	H60xW50xL1000	7.5+7.5	1500						
	LC5060-L-1100-U	H60xW50xL1100	8+8	1600						
	LC5060-L-1200-U	H60xW50xL1200	9+9	1800						
	LC5060-L-1300-U	H60xW50xL1300	10+10	2000						
	LC5060-L-1400-U	H60xW50xL1400	10.5+10.5	2100						
	LC5060-L-1500-U	H60xW50xL1500	11.5+11.5	1150						
	LC5060-L-1600-U	H60xW50xL1600	12.5+12.5	2500						
LC5060-L-1700-U	H60xW50xL1700	13+13	2600							
LC5060-L-1800-U	H60xW50xL1800	14+14	2800							
LC5060-L-1900-U	H60xW50xL1900	15+15	3000							
LC5060-L-2000-U	H60xW50xL2000	15.5+15.5	3100							
LC5060-L-2100-U	H60xW50xL2100	16+16	3200							
LC5060-L-2200-U	H60xW50xL2200	17+17	3400							
LC5060-L-2300-U	H60xW50xL2300	18+18	3600							
LC5060-L-2400-U	H60xW50xL2400	19+19	3800							

Ordering code for Up&down-Line parts

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC6060-L-500-U	H60xW60xL500	9+4	1300	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC6060-L-600-U	H60xW60xL600	10+5	1500						
	LC6060-L-700-U	H60xW60xL700	12+6	1800						
	LC6060-L-800-U	H60xW60xL800	14+7	2100						
	LC6060-L-900-U	H60xW60xL900	16+8	2400						
	LC6060-L-1000-U	H60xW60xL1000	17+8	2500						
	LC6060-L-1100-U	H60xW60xL1100	19+9	2800						
	LC6060-L-1200-U	H60xW60xL1200	21+10	3100						
	LC6060-L-1300-U	H60xW60xL1300	23+11	3400						
	LC6060-L-1400-U	H60xW60xL1400	25+12	3700						
	LC6060-L-1500-U	H60xW60xL1500	26+13	3900						
	LC6060-L-1600-U	H60xW60xL1600	28+14	4200						
	LC6060-L-1700-U	H60xW60xL1700	30+14	4400						
	LC6060-L-1800-U	H60xW60xL1800	31+15	4600						
	LC6060-L-1900-U	H60xW60xL1900	33+16	4900						
	LC6060-L-2000-U	H60xW60xL2000	35+17	5200						
	LC6060-L-2100-U	H60xW60xL2100	37+18	5500						
	LC6060-L-2200-U	H60xW60xL2200	39+19	5800						
	LC6060-L-2300-U	H60xW60xL2300	40+20	6000						
	LC6060-L-2400-U	H60xW60xL2400	42+21	6300						
	LC8060-L-500-U	H60xW80xL500	13+6	1900						
	LC8060-L-600-U	H60xW80xL600	16+8	2400						
	LC8060-L-700-U	H60xW80xL700	19+9	2800						
	LC8060-L-800-U	H60xW80xL800	22+11	3300						
	LC8060-L-900-U	H60xW80xL900	24+12	3600						
	LC8060-L-1000-U	H60xW80xL1000	27+13	4000						
	LC8060-L-1100-U	H60xW80xL1100	30+15	4500						
	LC8060-L-1200-U	H60xW80xL1200	32+16	4800						
	LC8060-L-1300-U	H60xW80xL1300	35+17	5200						
	LC8060-L-1400-U	H60xW80xL1400	38+19	5700						
	LC8060-L-1500-U	H60xW80xL1500	41+20	6100						
	LC8060-L-1600-U	H60xW80xL1600	43+21	6300						
LC8060-L-1700-U	H60xW80xL1700	46+23	6900							
LC8060-L-1800-U	H60xW80xL1800	49+24	7300							
LC8060-L-1900-U	H60xW80xL1900	51+25	7600							
LC8060-L-2000-U	H60xW80xL2000	54+27	8100							
LC8060-L-2100-U	H60xW80xL2100	57+28	8500							
LC8060-L-2200-U	H60xW80xL2200	59+29	8800							
LC8060-L-2300-U	H60xW80xL2300	62+31	9300							
LC8060-L-2400-U	H60xW80xL2400	65+32	9700							

Ordering code for Up&down-Line parts

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LC4080-L-500-U	H80xW40xL500	4+4	800	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4080-L-600-U	H80xW40xL600	4.5+4.5	900						
	LC4080-L-700-U	H80xW40xL700	5+5	1000						
	LC4080-L-800-U	H80xW40xL800	6+6	1200						
	LC4080-L-900-U	H80xW40xL900	7+7	1400						
	LC4080-L-1000-U	H80xW40xL1000	7.5+7.5	1500						
	LC4080-L-1100-U	H80xW40xL1100	8+8	1600						
	LC4080-L-1200-U	H80xW40xL1200	9+9	1800						
	LC4080-L-1300-U	H80xW40xL1300	10+10	2000						
	LC4080-L-1400-U	H80xW40xL1400	10.5+10.5	2100						
	LC4080-L-1500-U	H80xW40xL1500	11.5+11.5	1150						
	LC4080-L-1600-U	H80xW40xL1600	12.5+12.5	2500						
	LC4080-L-1700-U	H80xW40xL1700	13+13	2600						
	LC4080-L-1800-U	H80xW40xL1800	14+14	2800						
	LC4080-L-1900-U	H80xW40xL1900	15+15	3000						
	LC4080-L-2000-U	H80xW40xL2000	15.5+15.5	3100						
	LC4080-L-2100-U	H80xW40xL2100	16+16	3200						
	LC4080-L-2200-U	H80xW40xL2200	17+17	3400						
	LC4080-L-2300-U	H80xW40xL2300	18+18	3600						
	LC4080-L-2400-U	H80xW40xL2400	19+19	3800						
	LC6080-L-500-U	H80xW60xL500	9+4	1300						
	LC6080-L-600-U	H80xW60xL600	10+5	1500						
	LC6080-L-700-U	H80xW60xL700	12+6	1800						
	LC6080-L-800-U	H80xW60xL800	14+7	2100						
	LC6080-L-900-U	H80xW60xL900	16+8	2400						
	LC6080-L-1000-U	H80xW60xL1000	17+8	2500						
	LC6080-L-1100-U	H80xW60xL1100	19+9	2800						
	LC6080-L-1200-U	H80xW60xL1200	21+10	3100						
	LC6080-L-1300-U	H80xW60xL1300	23+11	3400						
	LC6080-L-1400-U	H80xW60xL1400	25+12	3700						
	LC6080-L-1500-U	H80xW60xL1500	26+13	3900						
	LC6080-L-1600-U	H80xW60xL1600	28+14	4200						
LC6080-L-1700-U	H80xW60xL1700	30+14	4400							
LC6080-L-1800-U	H80xW60xL1800	31+15	4600							
LC6080-L-1900-U	H80xW60xL1900	33+16	4900							
LC6080-L-2000-U	H80xW60xL2000	35+17	5200							
LC6080-L-2100-U	H80xW60xL2100	37+18	5500							
LC6080-L-2200-U	H80xW60xL2200	39+19	5800							
LC6080-L-2300-U	H80xW60xL2300	40+20	6000							
LC6080-L-2400-U	H80xW60xL2400	42+21	6300							

Ordering code for Up&down-Line parts

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LC8080-L-500-U	H80xW80xL500	13+6	1900	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC8080-L-600-U	H80xW80xL600	16+8	2400						
	LC8080-L-700-U	H80xW80xL700	19+9	2800						
	LC8080-L-800-U	H80xW80xL800	22+11	3300						
	LC8080-L-900-U	H80xW80xL900	24+12	3600						
	LC8080-L-1000-U	H80xW80xL1000	27+13	4000						
	LC8080-L-1100-U	H80xW80xL1100	30+15	4500						
	LC8080-L-1200-U	H80xW80xL1200	32+16	4800						
	LC8080-L-1300-U	H80xW80xL1300	35+17	5200						
	LC8080-L-1400-U	H80xW80xL1400	38+19	5700						
	LC8080-L-1500-U	H80xW80xL1500	41+20	6100						
	LC8080-L-1600-U	H80xW80xL1600	43+21	6300						
	LC8080-L-1700-U	H80xW80xL1700	46+23	6900						
	LC8080-L-1800-U	H80xW80xL1800	49+24	7300						
	LC8080-L-1900-U	H80xW80xL1900	51+25	7600						
	LC8080-L-2000-U	H80xW80xL2000	54+27	8100						
	LC8080-L-2100-U	H80xW80xL2100	57+28	8500						
	LC8080-L-2200-U	H80xW80xL2200	59+29	8800						
	LC8080-L-2300-U	H80xW80xL2300	62+31	9300						
	LC8080-L-2400-U	H80xW80xL2400	65+32	9700						
	LC12080-L-500-U	H80xW120xL500	18+9	2700						
	LC12080-L-600-U	H80xW120xL600	22+11	3300						
	LC12080-L-700-U	H80xW120xL700	26+13	3900						
	LC12080-L-800-U	H80xW120xL800	30+15	4500						
	LC12080-L-900-U	H80xW120xL900	33+16	4900						
	LC12080-L-1000-U	H80xW120xL1000	37+18	5500						
	LC12080-L-1100-U	H80xW120xL1100	40+20	6000						
	LC12080-L-1200-U	H80xW120xL1200	44+22	6600						
	LC12080-L-1300-U	H80xW120xL1300	48+24	7200						
	LC12080-L-1400-U	H80xW120xL1400	52+26	7800						
	LC12080-L-1500-U	H80xW120xL1500	55+27	8200						
	LC12080-L-1600-U	H80xW120xL1600	59+29	8800						
LC12080-L-1700-U	H80xW120xL1700	63+31	9400							
LC12080-L-1800-U	H80xW120xL1800	67+33	10000							
LC12080-L-1900-U	H80xW120xL1900	70+35	10500							
LC12080-L-2000-U	H80xW120xL2000	74+37	11100							
LC12080-L-2100-U	H80xW120xL2100	77+38	11500							
LC12080-L-2200-U	H80xW120xL2200	81+40	12100							
LC12080-L-2300-U	H80xW120xL2300	85+42	12700							
LC12080-L-2400-U	H80xW120xL2400	88+44	13200							

Ordering code for Up&down-Belief series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC4060-B-450-U	H60xW236xL601	6+3	900	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4060-B-600-U	H60xW258xL707	8+4	1200						
	LC4060-B-740-U	H60xW278xL806	9+4	1300						
	LC4060-B-900-U	H60xW302xL919	10+5	1500						
	LC4060-B-1000-U	H60xW316xL990	12+6	1800						
	LC4060-B-1200-U	H60xW345xL1131	13+6	1900						
	LC4060-B-1540-U	H60xW254xL1089	10+5	1500						
	LC4060-B-1840-U	H60xW298xL1301	14+7	2100						
	LC4060-B-2040-U	H60xW327xL1443	15+7	2200						
	LC4060-B-2440-U	H60xW386xL1725	19+9	2800						
	LC4060-B-3040-U	H60xW473xL2150	22+11	3300						
	LC4060-B-4040-U	H60xW620xL2857	30+15	4500						
	LC4060-B-5040-U	H60xW766xL3564	40+20	6000						
	LC4060-B-6040-U	H60xW913xL4271	45+22	6700						
	LC4060-B-7040-U	H60xW1059xL4978	60+30	9000						
	LC6060-B-450-U	H60xW250xL601	15+7	2200						
	LC6060-B-660-U	H60xW281xL750	18+9	2700						
	LC6060-B-900-U	H60xW316xL919	20+10	3000						
	LC6060-B-1060-U	H60xW339xL1032	22+11	3300						
	LC6060-B-1200-U	H60xW360xL1131	25+12	3700						
	LC6060-B-1560-U	H60xW271xL1103	20+10	3000						
	LC6060-B-1860-U	H60xW315xL1315	27+13	4000						
	LC6060-B-2060-U	H60xW344xL1457	30+15	4500						
	LC6060-B-2460-U	H60xW403xL1739	37+18	5500						
	LC6060-B-3060-U	H60xW491xL2164	45+22	6700						
	LC6060-B-4060-U	H60xW637xL2871	60+30	9000						
	LC6060-B-5060-U	H60xW783xL3578	80+40	12000						
	LC6060-B-6060-U	H60xW930xL4285	90+45	13500						
	LC6060-B-7060-U	H60xW1076xL4992	120+60	18000						
	LC8060-B-680-U	H60xW298xL764	22+11	3300						
	LC8060-B-900-U	H60xW330xL919	27+13	4000						
	LC8060-B-1200-U	H60xW374xL1131	35+17	5200						
	LC8060-B-1580-U	H60xW288xL1117	30+15	4500						
	LC8060-B-1880-U	H60xW332xL1329	40+20	6000						
	LC8060-B-2080-U	H60xW361xL1471	45+22	6700						
	LC8060-B-2480-U	H60xW420xL1754	56+28	8400						
	LC8060-B-3080-U	H60xW508xL2178	67+33	10000						
	LC8060-B-4080-U	H60xW654xL2885	90+45	13500						
	LC8060-B-5080-U	H60xW801xL3592	120+60	18000						
	LC8060-B-6080-U	H60xW947xL4299	135+67	20200						
	LC8060-B-7080-U	H60xW1093xL5006	180+90	27000						


Ordering code for Up&down-Belief series

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W down+up	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX80	LC4080-B-450-U	H80xW236xL601	6+3	900	Non Dati Push Triac 0-10V Remote Tunable Emergency	2700K 3000K 4000K 6000K 6500K RGB RGBW	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4080-B-600-U	H80xW258xL707	8+4	1200						
	LC4080-B-740-U	H80xW278xL806	9+4	1300						
	LC4080-B-900-U	H80xW302xL919	10+5	1500						
	LC4080-B-1000-U	H80xW316xL990	12+6	1800						
	LC4080-B-1200-U	H80xW345xL1131	13+6	1900						
	LC4080-B-1540-U	H80xW254xL1089	10+5	1500						
	LC4080-B-1840-U	H80xW298xL1301	14+7	2100						
	LC4080-B-2040-U	H80xW327xL1443	15+7	2200						
	LC4080-B-2440-U	H80xW386xL1725	19+9	2800						
	LC4080-B-3040-U	H80xW473xL2150	22+11	3300						
	LC4080-B-4040-U	H80xW620xL2857	30+15	4500						
	LC4080-B-5040-U	H80xW766xL3564	40+20	6000						
	LC4080-B-6040-U	H80xW913xL4271	45+22	6700						
	LC4080-B-7040-U	H80xW1059xL4978	60+30	9000						
	LC6080-B-450-U	H80xW250xL601	15+7	2200						
	LC6080-B-660-U	H80xW281xL750	18+9	2700						
	LC6080-B-900-U	H80xW316xL919	20+10	3000						
	LC6080-B-1060-U	H80xW339xL1032	22+11	3300						
	LC6080-B-1200-U	H80xW360xL1131	25+12	3700						
	LC6080-B-1560-U	H80xW271xL1103	20+10	3000						
	LC6080-B-1860-U	H80xW315xL1315	27+13	4000						
	LC6080-B-2060-U	H80xW344xL1457	30+15	4500						
	LC6080-B-2460-U	H80xW403xL1739	37+18	5500						
	LC6080-B-3060-U	H80xW491xL2164	45+22	6700						
	LC6080-B-4060-U	H80xW637xL2871	60+30	9000						
	LC6080-B-5060-U	H80xW783xL3578	80+40	12000						
	LC6080-B-6060-U	H80xW930xL4285	90+45	13500						
	LC6080-B-7060-U	H80xW1076xL4992	120+60	18000						
	LC8080-B-680-U	H80xW298xL764	22+11	3300						
	LC8080-B-900-U	H80xW330xL919	27+13	4000						
	LC8080-B-1200-U	H80xW374xL1131	35+17	5200						
	LC8080-B-1580-U	H80xW288xL1117	30+15	4500						
	LC8080-B-1880-U	H80xW332xL1329	40+20	6000						
	LC8080-B-2080-U	H80xW361xL1471	45+22	6700						
	LC8080-B-2480-U	H80xW420xL1754	56+28	8400						
	LC8080-B-3080-U	H80xW508xL2178	67+33	10000						
	LC8080-B-4080-U	H80xW654xL2885	90+45	13500						
	LC8080-B-5080-U	H80xW801xL3592	120+60	18000						
	LC8080-B-6080-U	H80xW947xL4299	135+67	20200						
	LC8080-B-7080-U	H80xW1093xL5006	180+90	27000						



TAKE NOTES FOR YOUR FAVORITE








CCT:

Dim:

Size:

Color:

Power:



HLINEAR LIGHTING CO., LIMITED.

FOSHAN HLINEAR LIGHTING CO., LTD.

SHENZHEN ALLWIN LIGHTING CO., LTD.



## HLINEAR

✉ [sales@hlinear.com](mailto:sales@hlinear.com)

🌐 [www.hlinear.com](http://www.hlinear.com)

☎ 0086-0757-885 20780

📍 No.7,XianXi Industrial Park,ShiShan Town,Nanhai District,  
Foshan, Guangdong, China .

## TASK LIGHTING Distributor in New Zealand

✉ [sales@tasklighting.co.nz](mailto:sales@tasklighting.co.nz)

🌐 [www.tasklighting.co.nz](http://www.tasklighting.co.nz)

☎ 0064-09 820 0004

📍 35 Timothy Place, Avondale, Auckland, NZ.