



8

Features :

- Universal AC input / Full range (up to 305VAC)
- Built-in active PFC function
- High efficiency up to 93%
- Protections: Short circuit / Over current / Over voltage / Over temperature

HLG-100H series

△ ⊗ **CB** (€

- Cooling by free air convection
- OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- Class 2 power unit
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet locations5 years warranty (Note.9)

🐺 SELV IP65 IP67 🕞 🔊 🔊 🗷 🗉 🖻 📼



HLG-100H-20 A Blank : IP67 rated. Cable for I/O connection.

110

M/

F.

A : IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.


B : IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or 10V PWM signal or resistance.

D (option) : IP67 rated. Timer dimming function, contact MEAN WELL for details.


SPECIFICATION

MODEL		HLG-100H-20	HLG-100H-24	HLG-100H-30	HLG-100H-36	HLG-100H-42	HLG-100H-48	HLG-100H-54					
	DC VOLTAGE	20V	24V	30V	36V	42V	48V	54V					
OUTPUT	RATED CURRENT	4.8A	4A	3.2A	2.65A	2.28A	2A	1.77A					
	RATED POWER	96W	96W	96W	95.4W	95.76W	96W	95.58W					
	RIPPLE & NOISE (max.) Note.2		150mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p	200mVp-p					
	VOLTAGE ADJ. RANGE Note.5		22~27V	27~33V	33~40V	38~46V	43~53V	49~58V					
			y internal potention	meter or through or									
	CURRENT ADJ. RANGE	3~4.8A	2.5~4A	2~3.2A	1.65 ~ 2.65A	1.4 ~ 2.28A	1.25 ~ 2A	1.1~1.77A					
	VOLTAGE TOLERANCE Note.3	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%					
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%					
	LOAD REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%					
	SETUP, RISE TIME Note.7	2500ms, 50ms at	2500ms, 50ms at full load 230VAC / 115VAC ; B type 2500ms, 200ms at 95% load 230VAC / 115VAC										
	HOLD UP TIME (Typ.)	16ms at full load 230VAC /115VAC											
		90 ~ 305VAC 127 ~ 431VDC											
	FREQUENCY RANGE	47 ~ 63Hz											
	POWER FACTOR (Typ.)	PF>0.98/115VAC, PF>0.95/230VAC, PF>0.93/277VAC at full load (Please refer to "Power Factor Characteristic" curve)											
INPUT	EFFICIENCY (Typ.)	93%	93%	93%	93%	93%	93%	93%					
	AC CURRENT (Typ.)	1.2A / 115VAC 0.55A / 230VAC 0.5A / 277VAC											
	INRUSH CURRENT (Typ.)	COLD START 75A/230VAC											
	LEAKAGE CURRENT	<0.75mA / 277VAC											
		95~106%											
	OVER CURRENT	Protection type : Constant current limiting, recovers automatically after fault condition is removed											
	SHORT CIRCUIT	Constant current limiting, recovers automatically after fault condition is removed											
PROTECTION		23~27V	28~34V	34 ~ 38V	41~46V	47 ~ 53V	54~60V	59~65V					
	OVER VOLTAGE	Protection type : Shut down o/p voltage with auto-recovery or re-power on to recovery											
		100°C ±10°C (RTH2)											
	OVER TEMPERATURE	Protection type : Shut down o/p voltage, recovers automatically after temperature goes down											
	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")											
	WORKING HUMIDITY	20 ~ 95% RH non-condensing											
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH											
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)											
	VIBRATION	10 ~ 500Hz, 5G 12min./1cycle, period for 72min. each along X, Y, Z axes											
		UL8750, CSA C22.2 No. 250.0-08, EN61347-1, EN61347-2-13 independent IP65 or IP67, J61347-1, J61347-2-13 approve											
	SAFETY STANDARDS Note.6	design refer to UL60950-1, TUV EN60950-1											
SAFETY &	WITHSTAND VOLTAGE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC											
EMC	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C/70% RH											
-	EMC EMISSION	Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (≧60% load) ; EN61000-3-3											
	EMC IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, light industry level (surge 4KV), criteria A											
	MTBF	192.2Khrs min. MIL-HDBK-217F (25°C)											
OTHERS	DIMENSION	220*68*38.8mm (L*W*H)											
	PACKING	1.12Kg; 12pcs/14.4Kg/0.8CUFT											
NOTE	 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Derating may be needed under low input voltages. Please check the static characteristics for more details. 5. Type A only. 6. Safety and EMC design refer to EN60598-1, CNS15233, GB7000.1, FCC part18. 7. Length of set up time is measured at cold first start. Turning ON/OFF the power supply may lead to increase of the set up time. 8. The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again. 9. Refer to warranty statement. 												



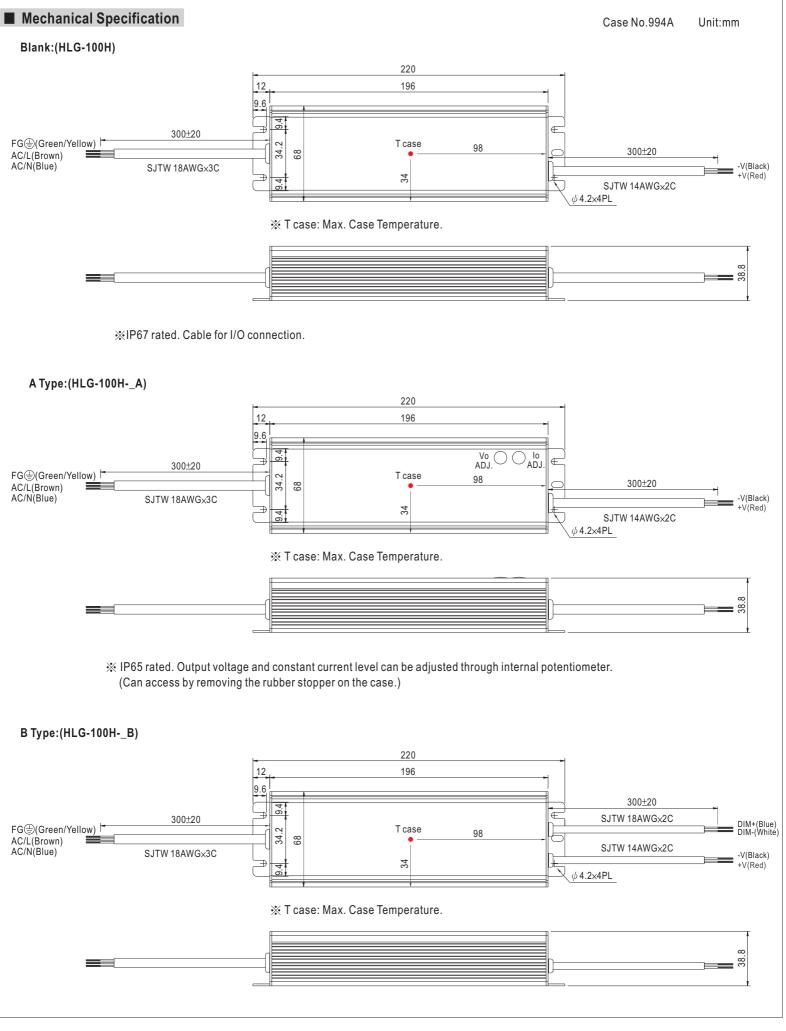




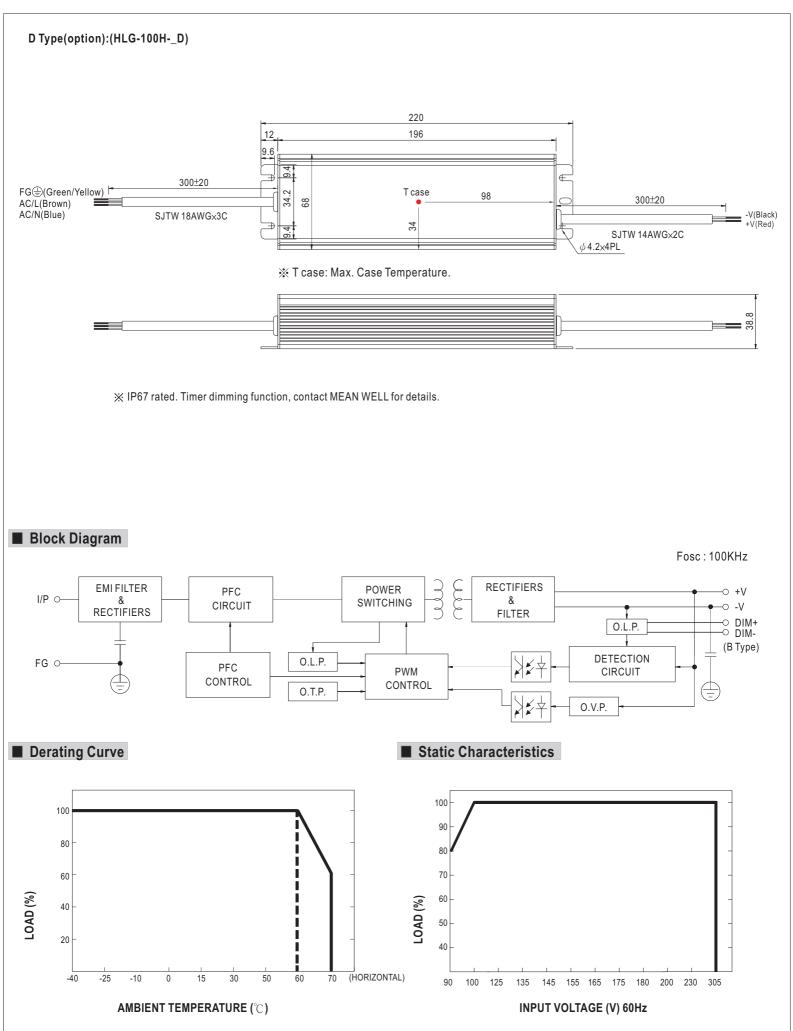




Power Factor Characteristic

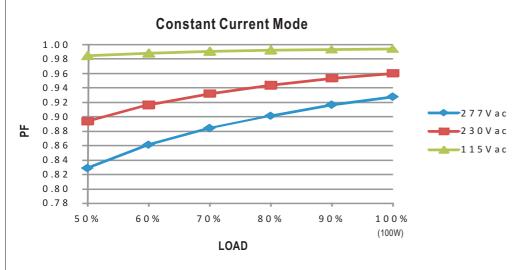

EFFICIENCY vs LOAD (48V Model)


HLG-100H series possess superior working efficiency that up to 93% can be reached in field applications.

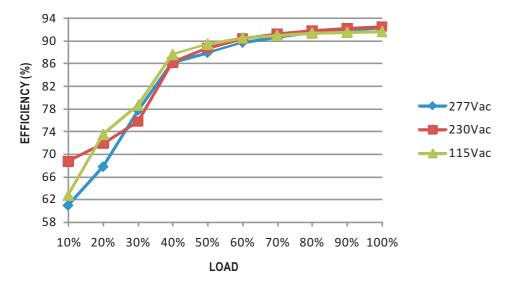

DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs. Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).



Typical LED power supply I-V curve



■ DIMMING OPERATION



※ Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.

※ Please DO NOT connect "DIM-" to "-V".

※ Reference resistance value for output current adjustment (Typical)

Resistance value	10K Ω	20Κ Ω	30Κ Ω	40K Ω	50Κ Ω	60K Ω	70Κ Ω	80K Ω	90Κ Ω	100K Ω	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%
× 1 ~ 10V dimming function for output current adjustment (Typical)											
Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%


※ 10V PWM signal for output current adjustment (Typical): Frequency range :100Hz ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	102%~108%

XUsing the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.

XDirect connecting to LEDs is suggested, but is not suitable for using additional drivers.

Dimming connection diagram for turning the lighting fixture ON/OFF :

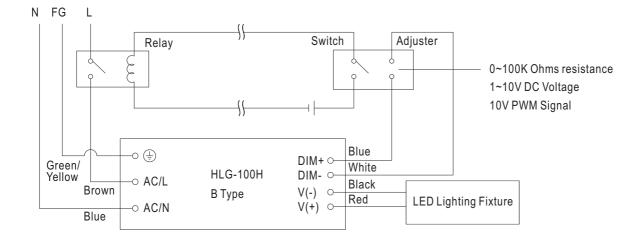

Using a switch and relay can turn ON/OFF the lighting fixture.

1. Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-. 2. The LED lighting fixture can be turned ON/OFF by the switch.



WATERPROOF CONNECTION

 \odot Waterproof connector

Waterproof connector can be assembled on the output cable of HLG-100H to operate in dry/wet/damp or outdoor environment.

