

LS100M


6W/m Interior Micro LED Strip



Applications

- Suitable strip for our Micro profile range
- Under shelf display lighting
- Kitchen toe kicks
- Under bench top returns
- Book shelving
- Accent lighting

Dimensions

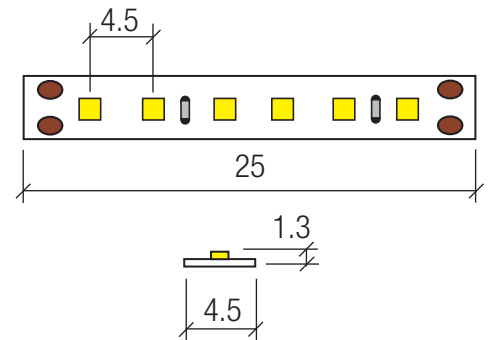

Specification

COLOUR	2700K	3000K	4000K	5500K	BLUE
CODE	LS100M-24V-6W-27K	LS100M-24V-6W-3K	LS100M-24V-6W-4K	LS100M-24V-6W-55K	LS100M-24V-6W-B
WATTS	6W/m				
VOLTS INPUT	24VDC				
AMPS INPUT	0.26Amps/m (24V)				
COLOUR	2700K	Warm White	Neutral White	White	Blue
COLOUR TOL	+/- 100K	+/- 100K	+/- 100K	+/- 200K	+/- 1nm
CRI	>90				---
LUMENS	600lm/m	600lm/m	630lm/m	660lm/m	---
BEAM ANGLE	120°				
IP RATING	IP20 Indoor Use Only				
DIM PWM	Yes				
WORKING TEMPERATURE	-25° C - +60° C				
LED TYPE	3080				
LUMEN MAINTENANCE	L70B10 @ 50,000hrs				
WARRANTY	5 years				
MAX RUN	5m				
LED PITCH	4.5mm & 240 LEDs/m				
CUT LENGTH	25mm (6 LEDs)				
FIXING	3M doubled sided tape				
CONNECTION	0.5mm² red/black 2 core tail				

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors. Task Lighting also reserves the right to modify/delete product details without notice.