
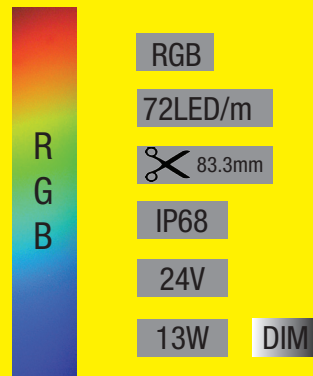


LumiFlexLED Neon - LDNF324TVF

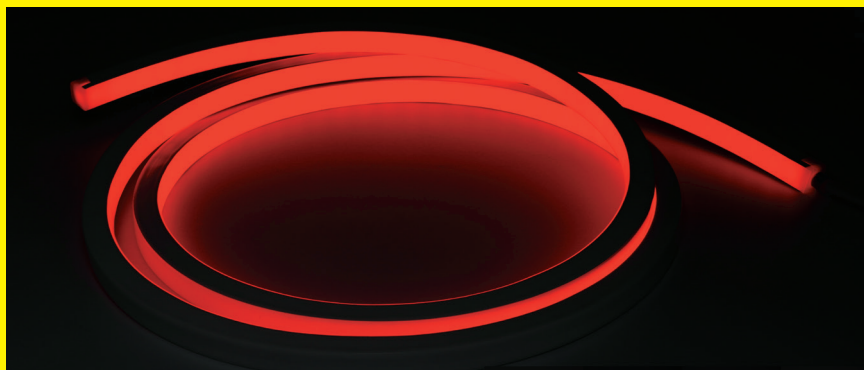


Top View 120deg RGB Colour Changing 13W IP68

SPECIFICATION

| | |
|--------------|------------------------------------|
| CODE | LDNF324TVF |
| COLOUR | RGB Colour Changing |
| WATTS | 13W/m |
| VOLTS INPUT | 24VDC |
| AMPS INPUT | 0.55Amps/m |
| IP RATING | IP68 |
| DIM PWM | Yes |
| WORKING TEMP | -30 to +45deg C |
| LED | Epistar 5050 |
| WARRANTY | 3years |
| MAX RUN | 10m single feed or 20m double feed |
| BEND RADIUS | 60mm minimum |
| BEAM ANGLE | 120deg approx |
| CUT LENGTH | 83.3mm |
| FIXING | By profile or clips |
| CONNECTION | Factory moulded cable |

DIMENSIONS

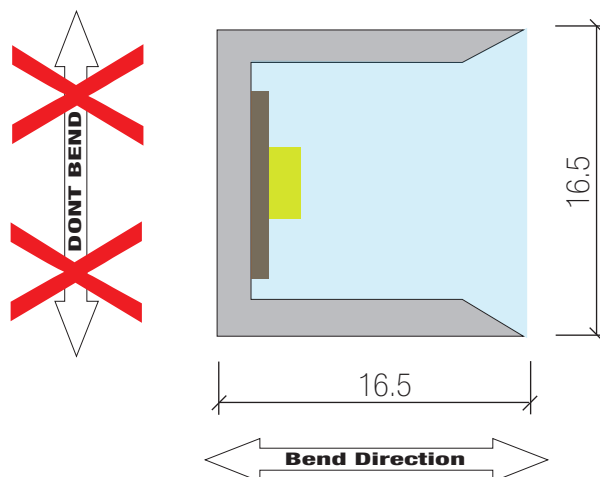

FEATURES:

- # Continuous linear light with no spotting.
- # UV stabilised PVC & chlorine resistant.

APPLICATIONS:

- # Accent lighting in exterior applications.
- # Exterior steps & seating.
- # High lighting buildings
- # Creating sculptural luminous forms.

NOTE:

- # Cable entry type & cable length need to be specified.
- # When feeding from both ends its best practice for cable lengths to be the same.
- # Note that lengths will be cut down to the nearest cut point see "Cut Length" above.
- # Note bend direction diagram. Great care must be taken on install to bend only in the direction shown or risk breaking the LED circuit board & voiding the warranty.

