

IP66 VANITY STRIP PACK

4.8W/m 24VDC IP66




Features

- Pre-made packs available in 3 standard vanity sizes 518mm, 817mm and 1115mm overall including endcaps
- Constant Voltage 24VDC
- High density 140LEDs/m, CRI92+
- Complete with pre soldered 0.5mm tails (clear) 1m long
- Supplied with 3M double sided tape for easy install. LED strip must be installed using a TASK Lighting approved mounting profile for warranty purposes
- Dimmable by PWM (Pulse width modulation)

Specification

Watts/m	4.8W/m
Lumen output	3000K - 360Lm/m Silicone sleeves cause a colour shift of approx +200K
Beam angle	120°
Cut points	50mm
Max single feed run	5m
LEDS/m	140 LEDs/m
Working temp	-25 ~ 60°C
Warranty	5 Years
IP rating	IP66
Dimensions	12x6mm
Dimmable	Yes (PWM)

Dimensions

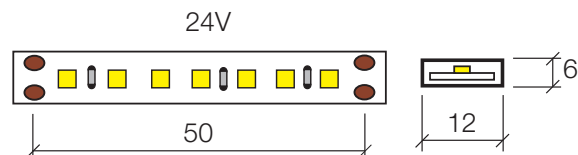

Codes

CCT	500MM	800MM	1100MM
WW (3000K)	DSLVP4.8WW24V500	DSLVP4.8WW24V800	DSLVP4.8WW24V110

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors. Task Lighting also reserves the right to modify/delete product details without notice.