


LS110

Classic Series 15W/m High CRI LED Strip



Dimensions

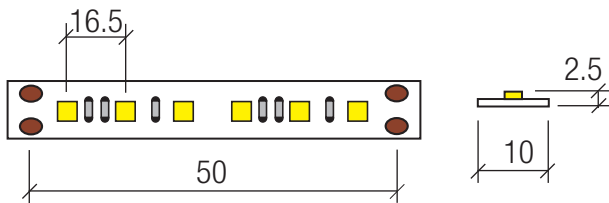


Applications

- Anywhere a high colour rendering is needed
- Museums, art galleries, clothing shops, shoe shops, Cabinet and display lighting

Specification

| COLOUR | 3000K |
|---------------------|--|
| CODE (24V) | LS110-24V-15W-3K |
| WATTS | 15W/m |
| VOLTS INPUT | 24VDC |
| AMPS INPUT | 0.625Amps/m (24V) |
| COLOUR TOL | +/- 100K |
| CRI | >95 R9=89 |
| LUMENS | 1425lm/m |
| EFFICACY | 95lm/w |
| BEAM ANGLE | 120° |
| IP RATING | IP20 Indoor Use Only |
| DIM PWM | Yes |
| WORKING TEMPERATURE | -25° C to +60° C |
| LED | Epistar 5050 |
| LUMEN MAINTENANCE | L70B10 @ 50,000 Hrs |
| WARRANTY | 5years |
| MAX RUN | 10m |
| LED PITCH | 7.1mm & 140 LEDs/m |
| CUT LENGTH | 50mm (7 LED) |
| FIXING | 3M doubled sided tape |
| CONNECTION | 0.5mm ² red/black 2 core tail |

Spectral Distribution Chart

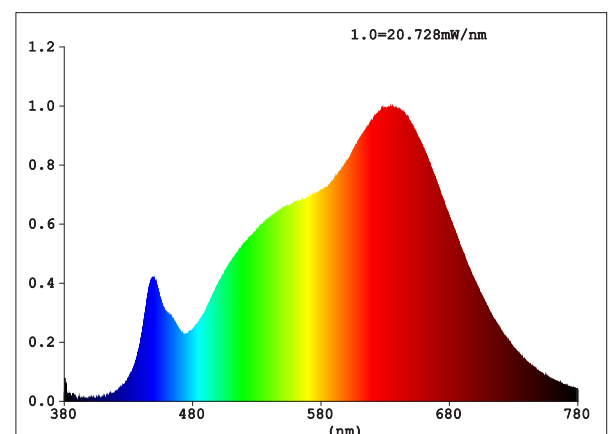

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors.
Task Lighting also reserves the right to modify/delete product details without notice.