

Specifiers Linear Series - LS112Jewellery - Interior



IP20 14.4W

24V

DIM

60LED/m


✂ 100mm 24V

14.4W - 60LEDs/m - High Power

SPECIFICATION

COLOUR	Warm White / Cool White
CODE	LS112W/WW24
WATTS	14.4W/m
VOLTS INPUT	24VDC
AMPS INPUT	0.6Amps/m
COLOUR TEMPERATURE	3000K / 5500K
COLOUR TOLERANCE	+/- 100K, +/- 200K
CRI	>90
LUMENS	1200lm/m
EFFICACY	83lm/w
BEAM ANGLE	120°
IP RATING	IP20 Indoor Use Only
DIM PWM	Yes
WORKING TEMP	-25° C -/+60° C
LED	Epistar 5050
LUMEN MAINTENANCE	L70 @ 50,000hrs
WARRANTY	5 years
MAX RUN	5m
LED PITCH	16.5mm & 60 LEDs/m
CUT LENGTH	100mm (6 LEDs)
FIXING	3M doubled sided tape
CONNECTION	0.5mm ² red/black 2 core tail

DIMENSIONS

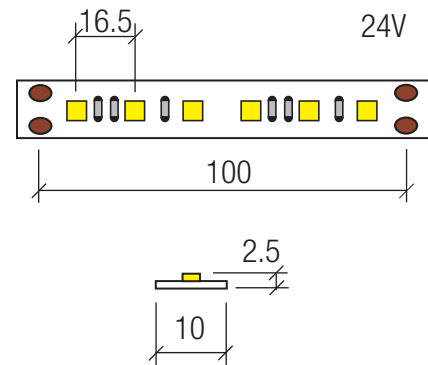

FEATURES

- # Specifically designed with warm and cool white LEDs to enhance the appearance of jewellery in display cabinets
- # 60 LEDs/m

APPLICATIONS

- # Retail jewellery cabinets

NOTE

This linear LED product must be installed in an appropriate TASK Lighting or similar approved LED mounting profile/channel to dissipate heat. Failure to do so may result in a much shortened LED life, colour shift and void the warranty.

While every effort has been made to ensure the accuracy of all information provided Task Lighting can not be held responsible for any errors. Task Lighting also reserves the right to modify/delete product details without notice.