


## Specifiers Linear Series - LS102RGB - Exterior

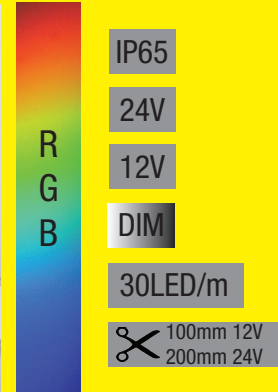


**Low Power - 7.2W - RGB Colour Changing - IP65**

### SPECIFICATION

COLOUR	RGB
CODE (24V)	LS102RGB24
CODE (12V)	LS102RGB12
WATTS	7.2W/m
VOLTS INPUT	24VDC & 12VDC
AMPS INPUT	0.3Amps/m @ 24V & 0.6Amps @ 12V
COLOUR TEMP	Red 621nm, Green 528nm, Blue 466nm
BEAM ANGLE	120°
IP RATING	IP65
DIM PWM	Yes
WORKING TEMPERATURE	-20° C to +60° C
LED TYPE	Epistar
LUMEN MAINTENANCE	L70 @ 50,000hrs
WARRANTY	5years
MAX RUN LENGTH	5m
LED PITCH	33mm (30 LEDs/m)
CUT LENGTH	100mm 12V & 200mm 24V
FIXING	3M double sided tape
CONNECTION	0.5mm <sup>2</sup> 4 core tail

### DIMENSIONS

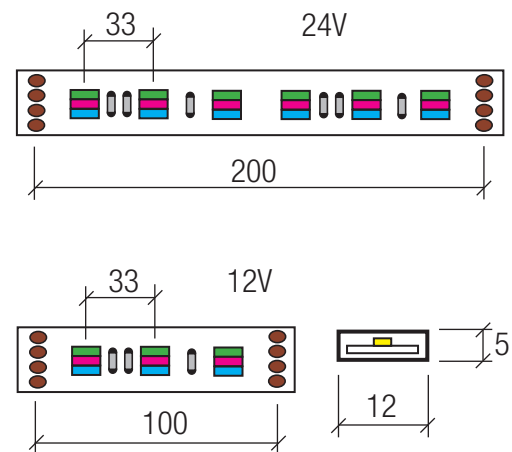

### FEATURES

- # RGB lighting provides great ambience
- # 3M double sided tape mounting
- # Requires dedicated RGB 3 channel controllers
- # 1oz copper tape for greater heat dissipation

### APPLICATIONS

- # Under exterior bench seating
- # Under exterior stair treads
- # Under eaves
- # Bathrooms
- # Pergolas

### NOTE

This linear LED product must be installed in an appropriate TASK Lighting or similar approved LED mounting profile/channel to dissipate heat. Failure to do so may result in a much shortened LED life, colour shift and void the warranty.